



## LP-ULFTD-17512

### 6" SQUARE LED PANEL LIGHT LP-ULFTD-17512, 120V 12W 4000K (NATURAL WHITE)

#### Specifications





<b>Model No.:</b>	LP-ULFTD-17512
<b>Input Voltage:</b>	120V AC
<b>Wattage:</b>	12W
<b>Frequency :</b>	50-60 Hz
<b>Color Temperature:</b>	4000K (Natural White)
<b>Brightness:</b>	900 Lumens
<b>Beam Angel:</b>	110°
<b>Trim Color:</b>	White
<b>Dimmable:</b>	Yes
<b>IC Rated:</b>	Yes
<b>Rendering Index:</b>	CRI>80
<b>IP Rated:</b>	IP20 (Suitable for damp locations)
<b>Wire Length:</b>	25 cm (9.8 in) 22AWG
<b>Dimensions:</b>	<b>Overall Length:</b> 173 mm (6.81 in) <b>Depth:</b> 23 mm (0.9 in)
<b>Cut Size:</b>	155 mm (6.1 in)
<b>J-Box Dimensions:</b>	<b>Length:</b> 87 mm (3.425 in) <b>Width:</b> 87 mm (3.425 in) <b>Depth:</b> 33 mm (1.3 in)
<b>Certification:</b>	ETL



**SKU: 666561412555**


#### Features

- This downlight works in various indoor applications. It has universal ceiling applications.
- Easy installation, fast connecting with the input wires and spring clips for a secure mount.
- Recessed lighting is suitable for both dry and damp environments.
- Well suited for both residential and commercial indoor spaces.

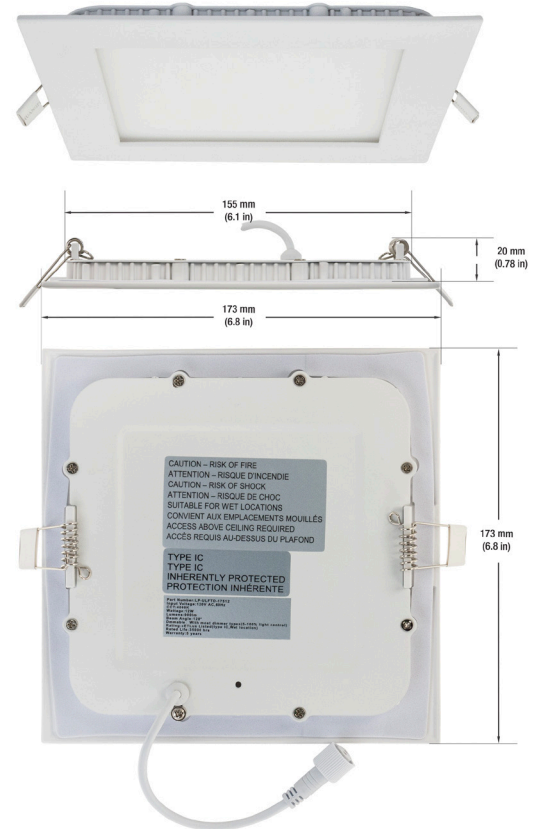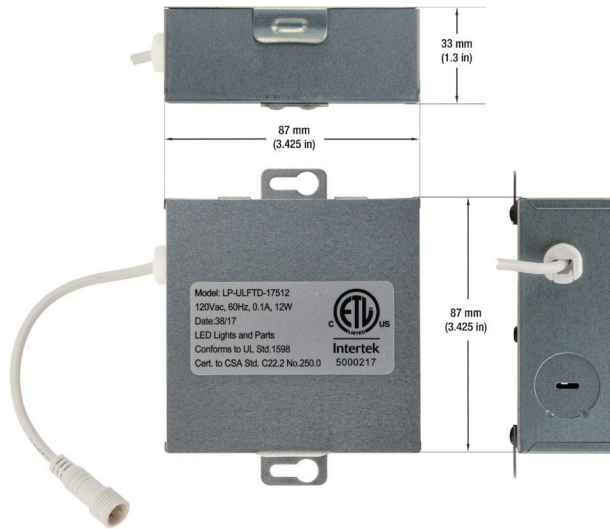

#### Disclaimer

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall LED Lights and Parts be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

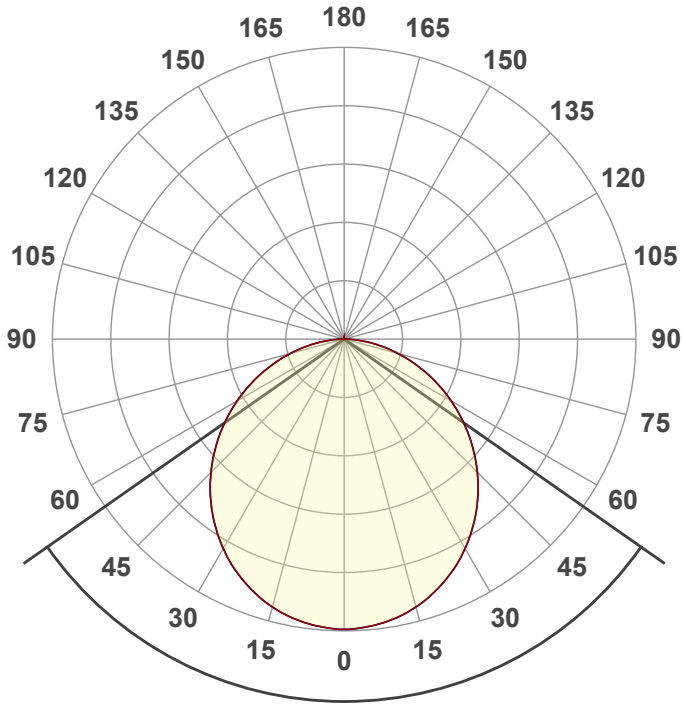

Beam angle

**110°**




Color




CIE1931  
x: 0.367  
y: 0.365



Spectra

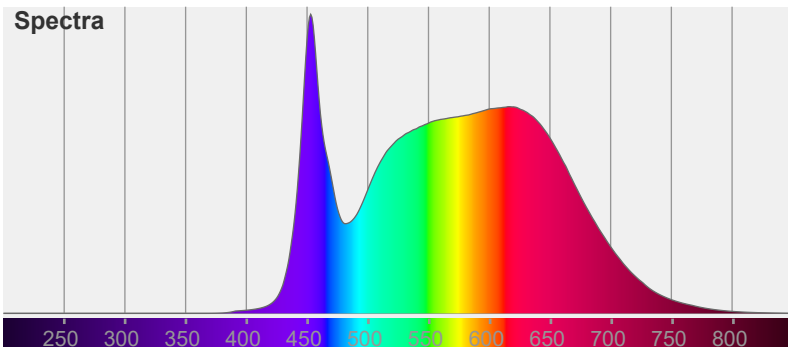


Power

Voltage: 116 V  
Current: 0.109 A

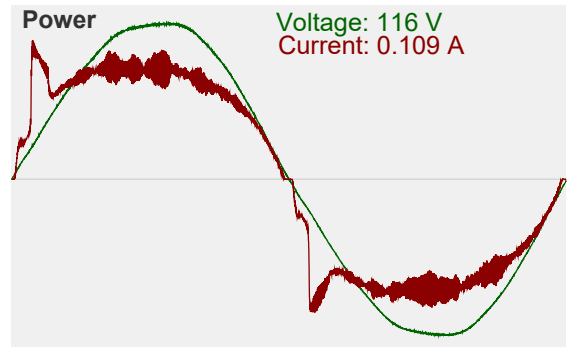


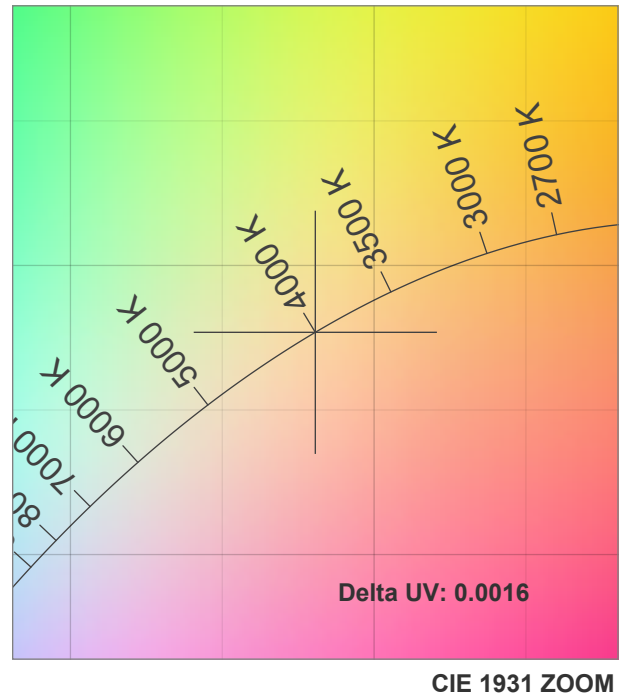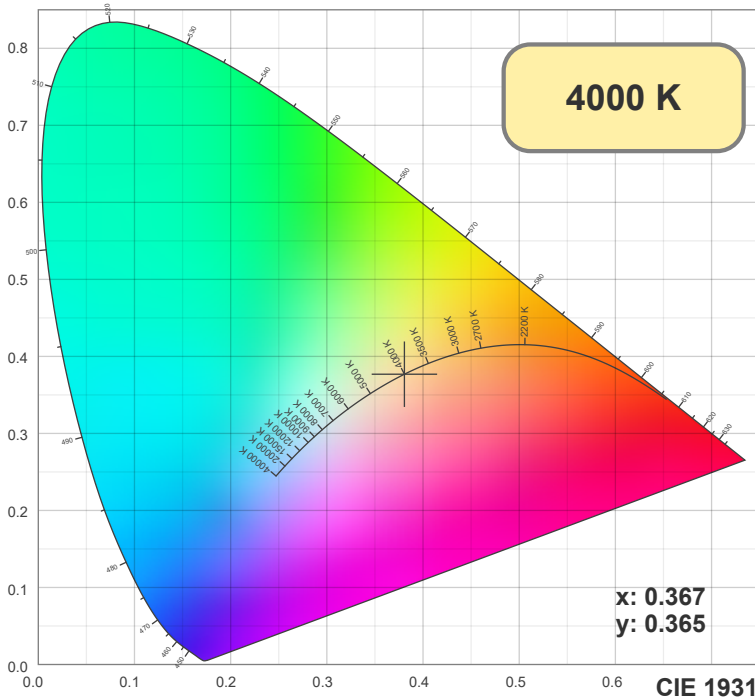

**TM30: 89.8**

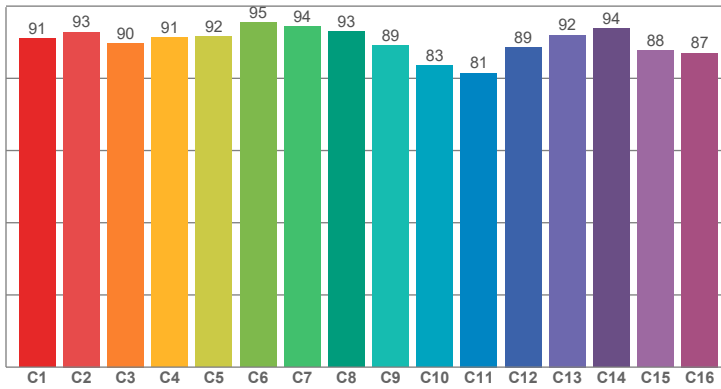

**CRI: 93.4 (R1-R8)**

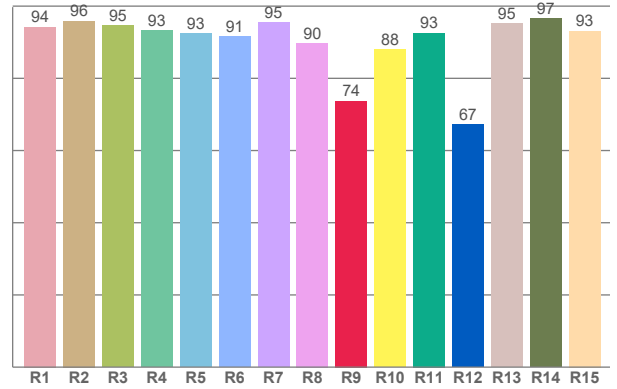

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.25	95.91	94.54	93.23	92.50	91.49	95.47	89.77	73.72	88.07	92.58	67.27	95.13	96.58	93.11


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.03	92.83	89.77	91.35	91.65	95.48	94.44	92.98	89.15	83.47	81.47	88.65	92.01	93.89	87.68	87.05

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.71	99.18	83.38	81.67	87.60	91.01	92.99	94.97	96.93	93.15	91.93	92.80	93.88	91.79	92.49

**CQS: 90.7**

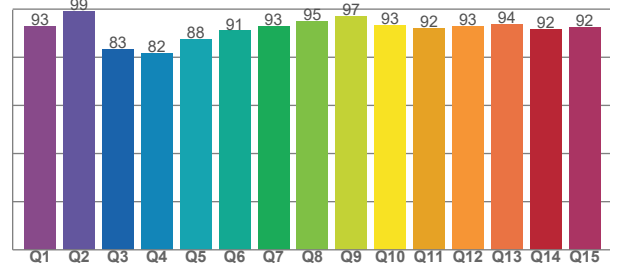

## Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
4000 K	93.4	73.7	89.8	99.2	90.7	0.4	0.4	0.2	0.3	-0.0016

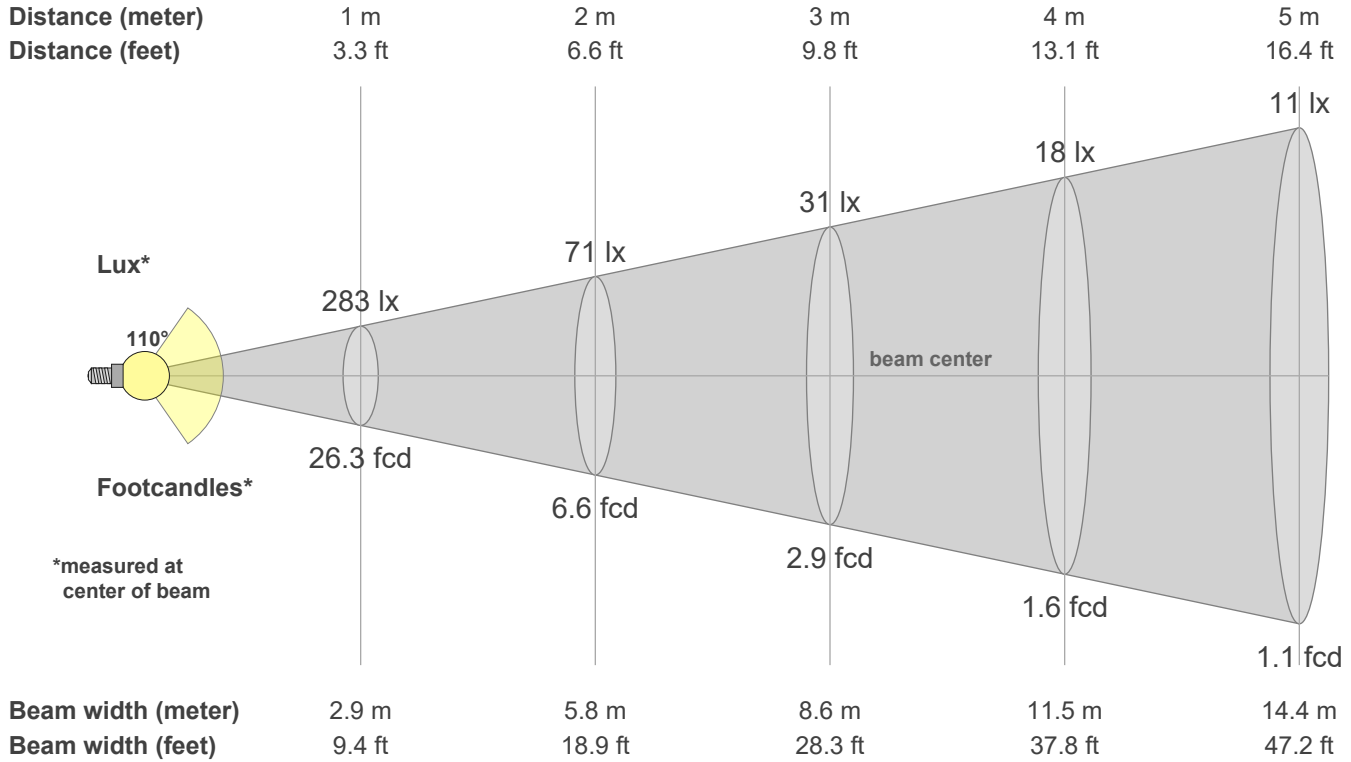

\*measured at center of beam

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
283	281	277	270	261	249	236	220	202	183	163	142	120	98	76	55	34	16	4	0
100%	99%	98%	96%	92%	88%	83%	78%	72%	65%	58%	50%	43%	35%	27%	19%	12%	6%	2%	0%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
283	281	277	270	261	249	236	220	202	183	163	142	120	98	76	55	34	16	4	0
100%	99%	98%	96%	92%	88%	83%	78%	72%	65%	58%	50%	43%	35%	27%	19%	12%	6%	2%	0%

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
283	281	277	270	261	249	236	220	202	183	163	142	120	98	76	55	34	16	4	0
100%	99%	98%	96%	92%	88%	83%	78%	72%	65%	58%	50%	43%	35%	27%	19%	12%	6%	2%	0%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
283	281	277	270	261	249	236	220	202	183	163	142	120	98	76	55	34	16	4	0
100%	99%	98%	96%	92%	88%	83%	78%	72%	65%	58%	50%	43%	35%	27%	19%	12%	6%	2%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
110.4°	163.1°	176.8°	78.0%	53.4%