

LED Lights and Parts WORLD OF LED LIGHTS

L-SHAPE LED PATHWAY LED LIGHT 12V AC/DC, 3W, 3000K (WARM WHITE)


<u>(</u>)...

Specifications		Intertek
Model No.:	RT31-3W-30K	
Input Voltage:	12V AC/DC	
Wattage:	3W	
Color Temperatures:	3000K (Warm White)	
Body Color:	Black	
IP Rating:	IP65 (Outdoor Rated)	
Cable Size:	Length: 110cm (3.6ft)	
	22AWG	
Dimensions:	403mm x 161mm x 41mm (15.86" x 6.33" x 1.6")	
	Spike Height: 203mm (8")	
Certification:	ETL	

Features

- Low-voltage outdoor lighting fixture for pathways and walkways.
- Operates on 12V AC/DC power supply, consuming 3 watts of power.
- Emits warm white light (3000K) with a luminous flux of 300Lm.
- IP65 rating for dust and water resistance in wet locations.
- RoHS certified as an eco-friendly product free from UV or hazardous materials.
- Offers a simple, clean, and efficient design for residential and commercial spaces.
- Provides ample downlight through an etched lens and maintains consistent
- output in tough environments.
- Made of durable aluminum for longevity and weather resistance.
- ETL certified for safety and performance standards.



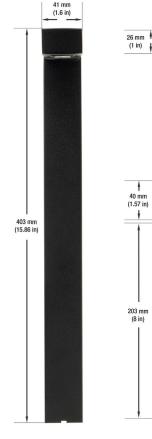

Extension Cables (Sold Separately)

Model: ALED-O-TC3 SKU: 666561430955



Model: ALED-O-E5 SKU: 666561430993



Model: ALED-O-E1 SKU: 666561430979



Model: ALED-O-H5S (6 output extension) SKU: 666561430962



Model: ALED-O-E3 SKU: 666561430986



11

Model: ALED-O-E10 SKU: 666561431006





The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall LED Lights and Parts be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.



120 mm (4.7 in)

38 mm (1.48 in)

SKU#: 666561413033

41 mm (1.6 in)