


## Model: VBD-024-200DM

<b>Input Voltage:</b>	100-130V AC
<b>Input Current at Max Load:</b>	3.18 A
<b>Frequency:</b>	47-63 Hz
<b>Output Voltage:</b>	24V DC
<b>Output Current:</b>	8.3 A
<b>Max Power:</b>	200W
<b>Dimensions L x W x H:</b>	392mm x 87mm x 60mm
<b>Weight:</b>	2.292 kg
<b>IP Rating:</b>	IP67 (Dry, Damp, and Wet Locations)
<b>Dimmable:</b>	Triac/ Phase-cut Dimming
<b>Wiring/Housing:</b>	Hardwire
<b>Operating Temperature:</b>	at least 90°C
<b>Standards:</b>	FC/UL/RoHS


Job Name: \_\_\_\_\_

Distributor: \_\_\_\_\_

Type: \_\_\_\_\_

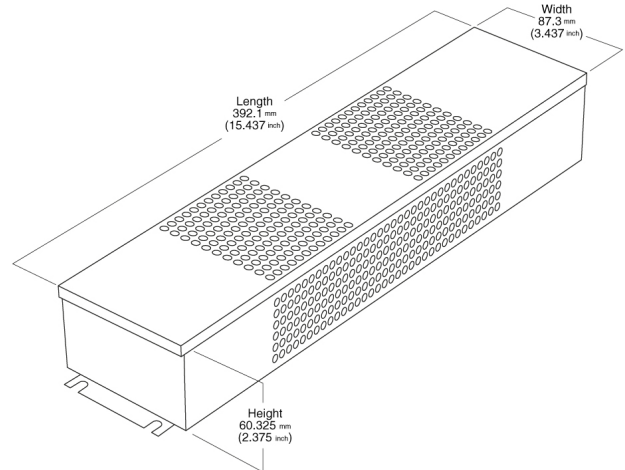

### Installation Diagram

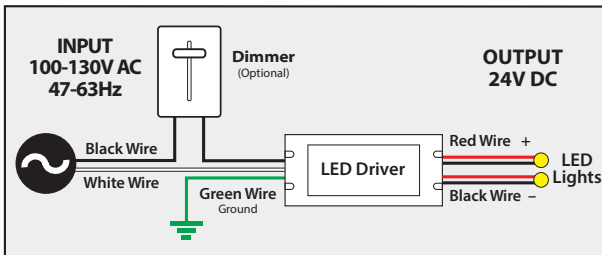

### Dimming

Veroboard Phase Cut Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, or TRIAC dimmers. The dimmer switch must be installed on the 120V AC side of the driver.



**24V DC  
200W**

**SKU: 666561415785**