

## Model: VBD-024-030VTD2JV2


<b>Input Voltage:</b>	100 – 277V AC
<b>Input Current at Max Load:</b>	0.5A
<b>Frequency:</b>	50/60 Hz
<b>Output Voltage:</b>	24V DC
<b>Output Current:</b>	1.25 A
<b>Max Power:</b>	30W
<b>Dimensions L x W x H:</b>	332mm x 78mm x 38mm
<b>Class Certification:</b>	Class 2/Class P/Type HL
<b>Weight:</b>	0.812 kg
<b>IP Rating:</b>	IP20 (Dry and Damp Locations)
<b>Dimmable:</b>	Triac/0/1-10V (5 in 1 Dimming)
<b>Wiring/Housing:</b>	Hardwire
<b>Operating Temperature:</b>	at least 90°C
<b>Standards:</b>	FC/UL/RoHS

Job Name: \_\_\_\_\_


Distributor: \_\_\_\_\_

Type: \_\_\_\_\_



### Derating Curve

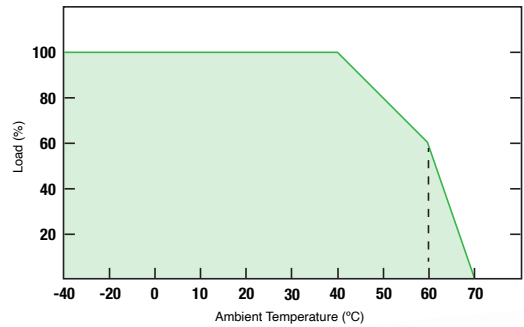

### Installation Diagram (with 0-10V Dimmers)

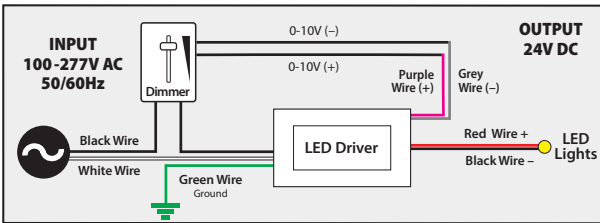


### (with Triac and Phase-cut Dimmers)

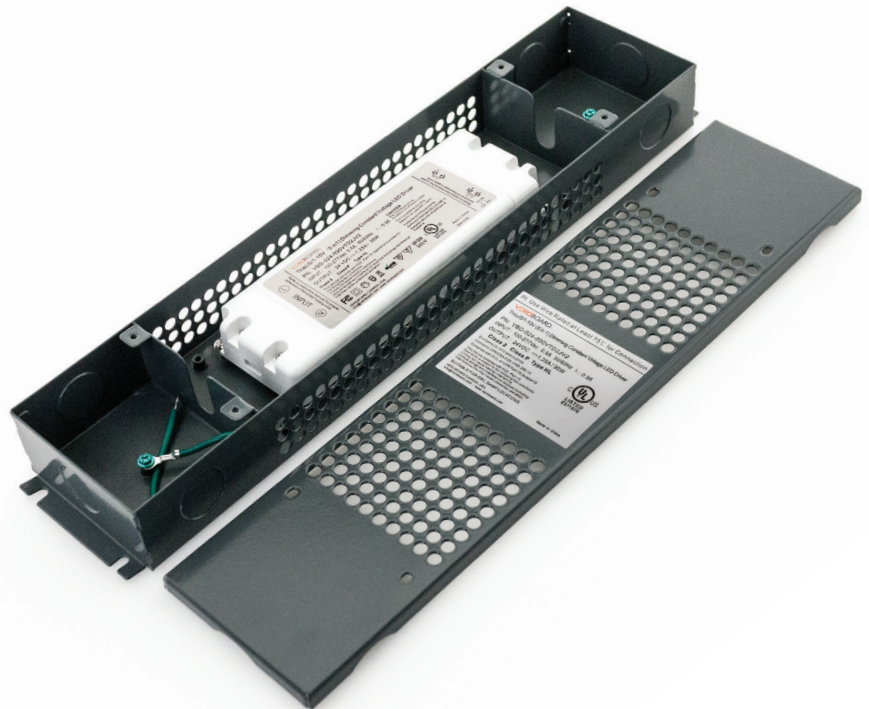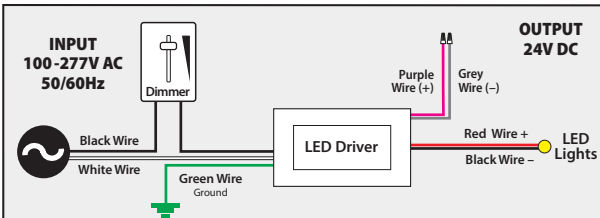

### Dimming

Veroboard 5 in 1 Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, TRIAC or 0-10V dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

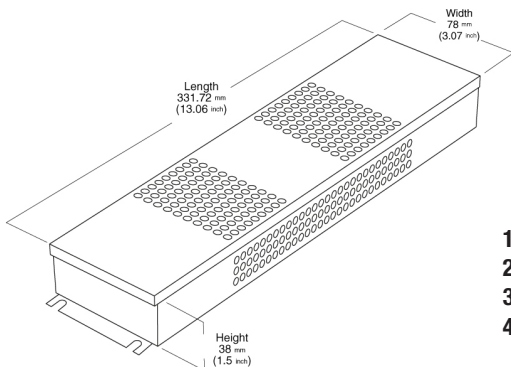

- 1 Dimming range from %0.1 to %100
- 2 Strong compatibility, flicker free dimming
- 3 Suitable for all LED lighting applications
- 4 Compliance to worldwide safety regulations for lighting



SKU: 666561419202