

8" Round Surface Mount 120V Downlight with Changeable Color Temperature (3CCT)

Name: _____

Company: _____

Phone: _____

Email: _____

SPECIFICATIONS



Model No.	HM04-PR8-18W120-3CCT-WSA
Voltage	120V AC
Wattage	18W
Color Temperature	Changeable Color (CCT) 3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Bulb Type	Integrated LED
Luminous Flux	1260Lm
Rendering Index	CRI>80
Body Color	White
Available Trim Color	Black Matt • Stain Nickel • Polished Chrome (Sold Separately)
Dimmable	Yes (Leviton and Lutron Dimmers)
Lifespan	35000 Hours
Beam Angle	120°
IP Rating	IP20 (Indoor Rated)
Dimensions	Ø218mm x 15.6mm Depth (Ø8.56in x 0.6in)
Certification	ETL/Energy Star



FEATURES

- Can be mounted on a regular ceiling using Surface Mounting Brackets.
- It also comes in Black, Nickel, and Chrome trim other than white color.
- We also carry similar fixtures in 11".
- Widely applicable for the ceiling in both commercial and residential buildings.
- Rated CRI>80 and meets the Canadian and United States standards.
- Has a high-quality reflector, that helps in avoiding glare.
- The LED light is integrated at the sides within the fixture that helps provide even light distribution without flicker.
- Dissipates very less heat and is safe to touch.



Polished Nickel Trim Satin Nickel Trim Black Trim



Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.



SKU: 666561420345


Light Measurement Report

Print date: 2023-01-09

Measurement date and time: 2023-01-09 10:42:46 AM – Measurement no. VFR-230109-0068-MS

Luminous Intensity diagram

Unit: 0-100% of peak intensity

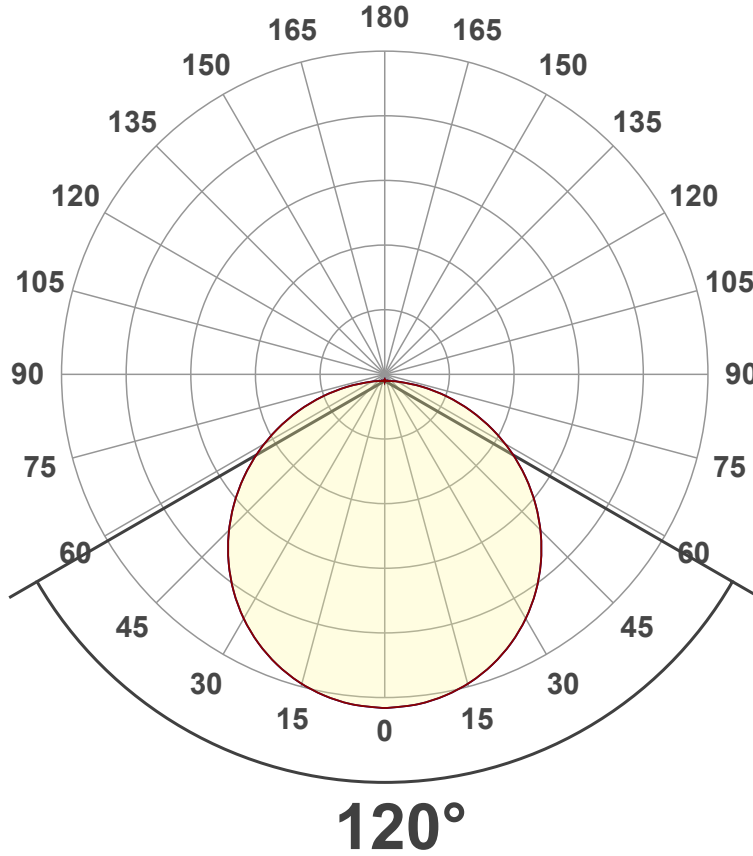

Main Values

Output (total Lumen)	1260 lm
Lumen Up% / Down%	0.35% / 99.65%
Peak Intensity	420 cd
Beam Angle (50%)	120°
Beam Angle (90%)	115.8°
Beam Angle (10%)	115.8°

Cut-off Angle

Average 2,5%	177.6°
--------------	--------

Field Angle


Average 10%	164.8°
-------------	--------

Intensity Ratio

In 120° cone	76.9%
In 90° cone	51.8%

C000-C180
C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

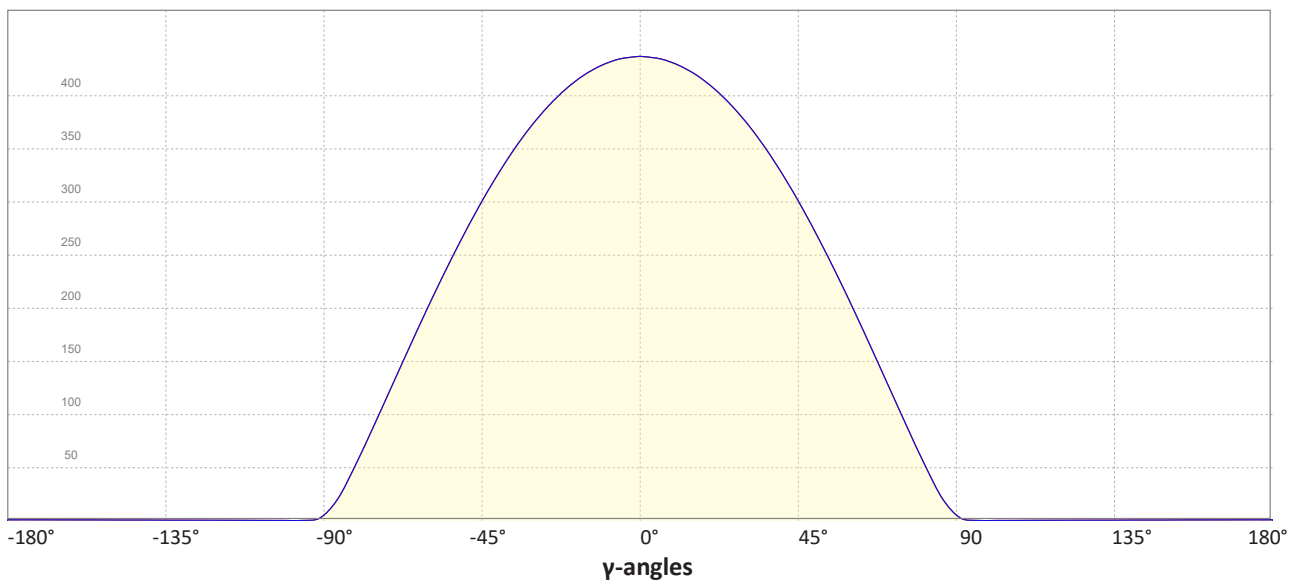

Light Measurement Report

Print date: 2023-01-09

Measurement date and time: 2023-01-09 10:42:46 AM – Measurement no. VFR-230109-0068-MS

Color details

Correlated Color Temperature, Target CCT = 3000 K
 Correlated Color Temperature, Measured CCT = 2958 K
 Color Rendering Index CRI 84.0
 Color Rendering Index, R9 (red component) R9 = 12.1
 Color Rendering TM30-18 R_f 85.5 – R_g 96.5
 Color Quality Scale CQS = 82.9

MacAdam Steps
 Color coordinates CIE 1931 (x;y) = (0.437;0.404)
 Color coordinate CIEs 1960 (u';v') = (0.251;0.348)
 Color deviation from BBL Duv = -0.0011
 Color coordinate CIEs 1976 (CIELUV) (u'';v'') = (0.251;0.251)


CIE 1931



CIE 1931 – zoomed on Planckian locus




Color Rendering Index per reference color (CIE 1995)

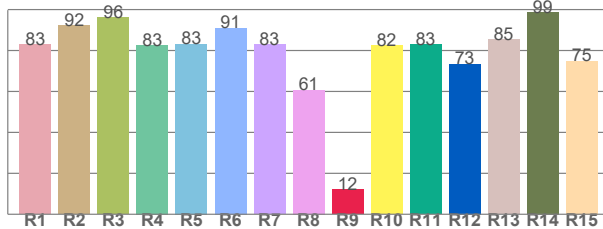


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83.0	92.3	96.2	82.6	83.2	91.0	82.9	60.7	12.1	82.5	82.9	73.4	85.4	98.7	74.9

Spectral power distribution (SPD) / W/nm – 0-100%

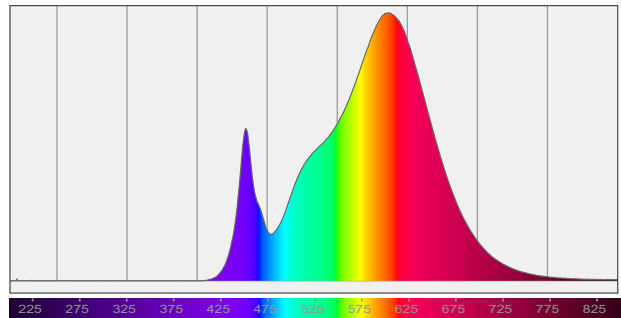


TM30-18 Rf-values per hue bin

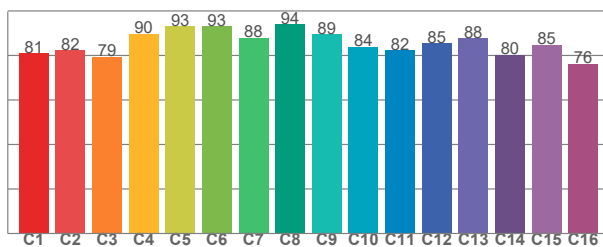

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80.9	82.3	79.3	89.7	93.2	93.1	88.0	94.0	89.5	83.9	82.3	85.4	87.8	80.4	84.8	76.3

Color Quality Scale by reference color

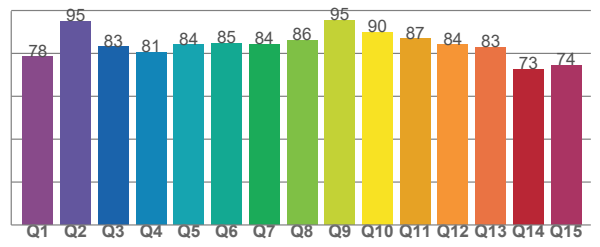

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.4	95.0	83.0	80.6	84.0	84.8	84.2	86.0	95.3	89.9	86.8	84.0	82.9	72.6	74.4

Light Measurement Report

Print date: 2023-01-09

Measurement date and time: 2023-01-09 10:42:46 AM – Measurement no. VFR-230109-0068-MS

Beam Details

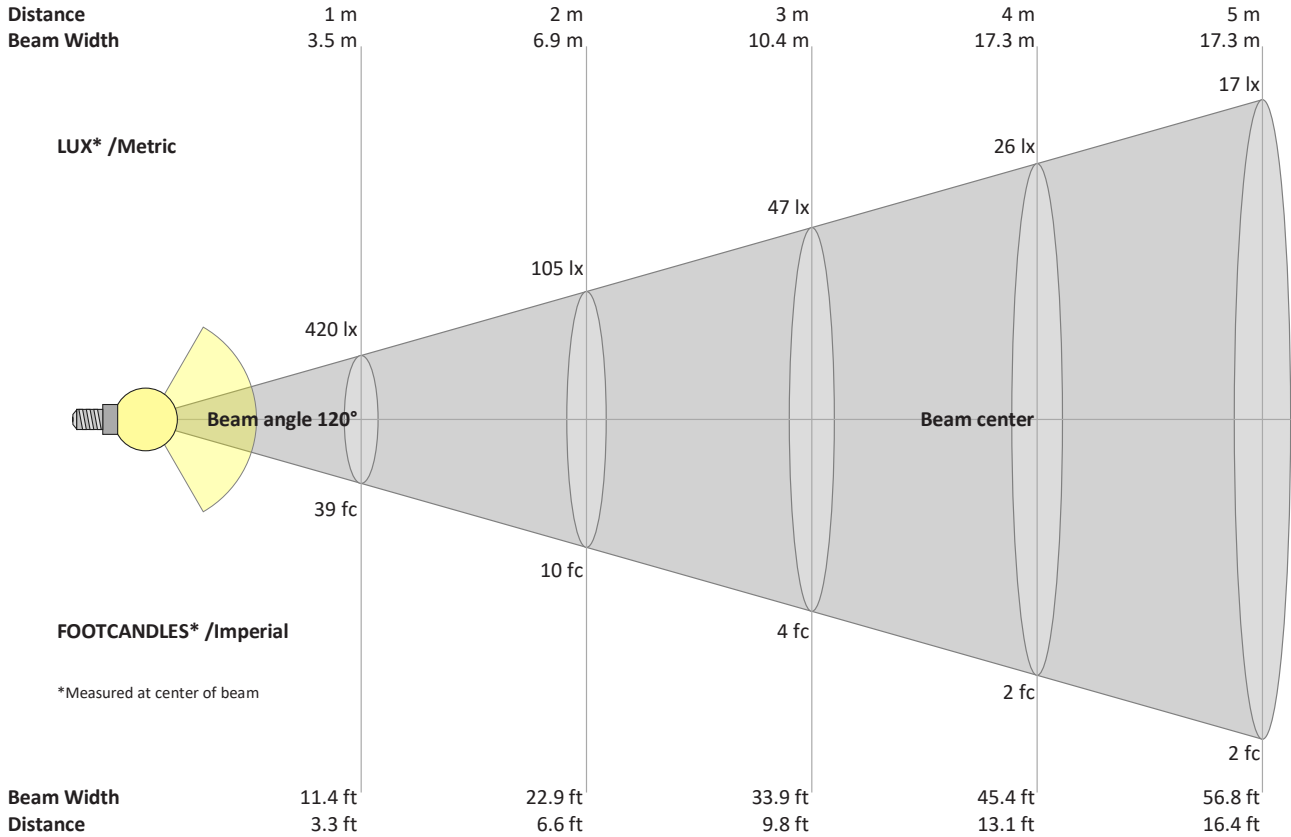

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
420	105	47	26	17	12	9	7	5	4	3	3	2	2	2	2	1	1	1	1	lux
39	9.7	4.3	2.4	1.6	1.1	0.8	0.6	0.5	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.1	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
420	418	413	405	393	379	361	340	316	289	260	229	196	162	127	92	57	26	6	1	cd
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	2%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
420	418	413	405	393	379	361	340	316	289	260	229	196	162	127	92	57	26	6	1	cd
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	2%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
420	418	413	405	393	379	361	340	316	289	260	229	196	162	127	92	57	26	6	1	cd
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	2%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
420	418	413	405	393	379	361	340	316	289	260	229	196	162	127	92	57	26	6	1	cd
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	2%	0%	of 0°val