

Model: OTM-VPA40-DIP

Input Voltage:	120-277V AC
Input Current:	0.52A
Frequency:	50-60 Hz
Output Voltage:	3-65V DC
Output Current:	300mA~1400mA
Max Power:	40W
Dimensions L x W x H:	159mm x 53.60mm x 20.72mm
IP Rating:	IP20 (Dry and Damp Locations)
Dimmable:	Yes (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Class Certification:	Class P
Standards:	cUL/SELV/RoHs


Job Name: _____

Distributor: _____


Type: _____




Installation Diagram (with 0-10V Dimmers)

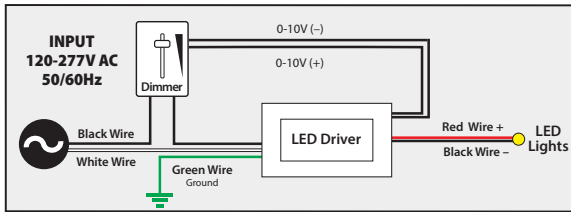

(with Triac and Phase-cut Dimmers)

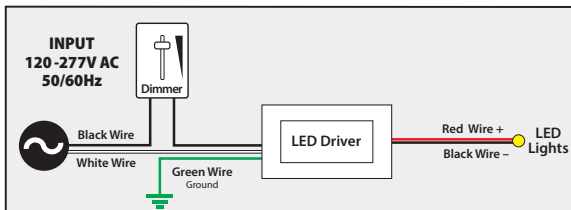


(Direct Wiring)

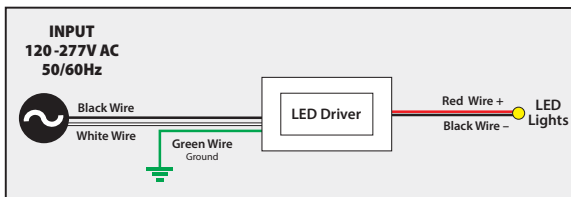

Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver Works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC single connected to the LED power supply.

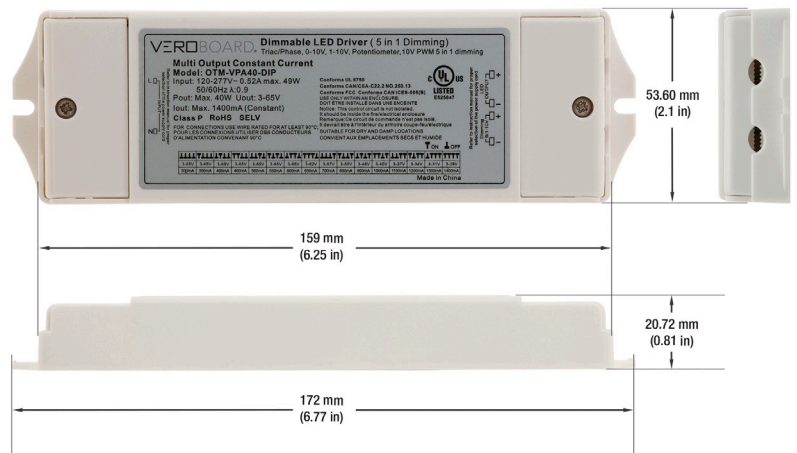

Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

0 DIMMABLE 100

**120-277V
40W
CLASS P**

SKU: 666561433765