

Model: OTM-VPA40-DIP

Input Voltage:	120-277V AC
Input Current:	0.52A
Frequency:	50-60 Hz
Output Voltage:	3-65V DC
Output Current:	300mA~1400mA
Max Power:	40W
Dimensions L x W x H:	159mm x 53.60mm x 20.72mm
IP Rating:	IP20 (Dry and Damp Locations)
Dimmable:	Yes (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Class Certification:	Class P
Standards:	cUL/SELV/RoHS


Job Name: _____

Distributor: _____


Type: _____




Installation Diagram (with 0-10V Dimmers)

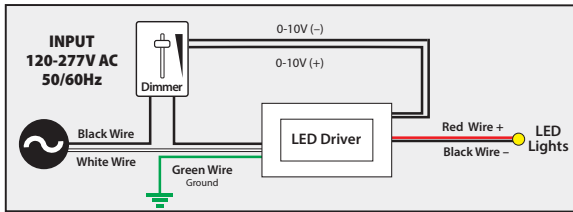

(with Triac and Phase-cut Dimmers)

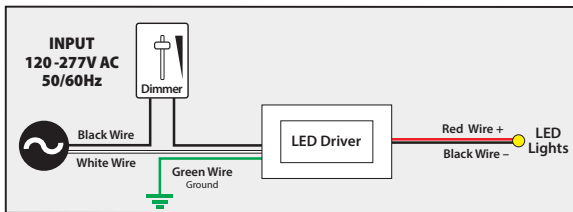


(Direct Wiring)

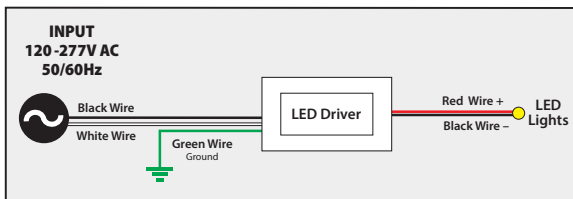

Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver Works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC single connected to the LED power supply.

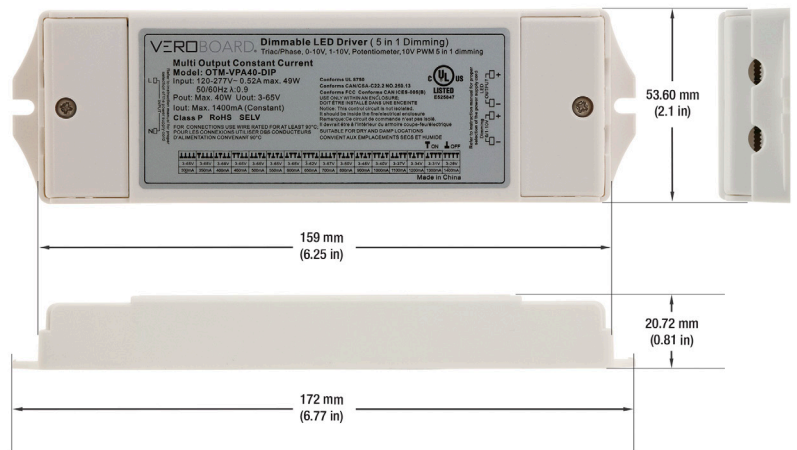

T ON ⬇ OFF															
3-65V	3-65V	3-65V	3-65V	3-65V	3-65V	3-65V	3-62V	3-57V	3-50V	3-45V	3-40V	3-37V	3-34V	3-31V	3-29V
300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA



120-277V
40W
CLASS P

SKU: 666561433765