

## Model: OTM-VPA60-DIP

<b>Input Voltage:</b>	120-277V AC
<b>Input Current:</b>	0.78A
<b>Frequency:</b>	50-60 Hz
<b>Output Voltage:</b>	3-65V DC
<b>Output Current:</b>	600mA~2100mA
<b>Max Power:</b>	60W
<b>Dimensions L x W x H:</b>	180mm x 62mm x 24.2mm
<b>IP Rating:</b>	IP20 (Dry and Damp Locations)
<b>Dimmable:</b>	Yes (5 in 1 Dimming)
<b>Wiring/Housing:</b>	Hardwire
<b>Class Certification:</b>	Class P
<b>Standards:</b>	cUL/SELV/RoHs


Job Name: \_\_\_\_\_

Distributor: \_\_\_\_\_


Type: \_\_\_\_\_




### Installation Diagram (with 0-10V Dimmers)

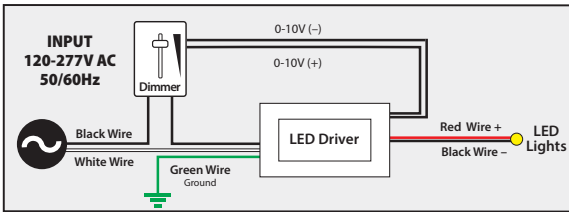

### (with Triac and Phase-cut Dimmers)

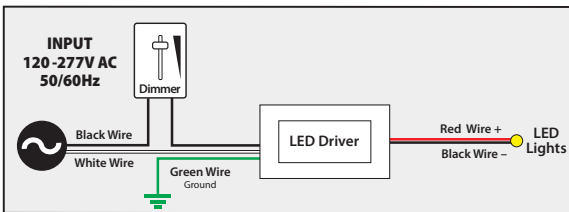

### (Direct Wiring)

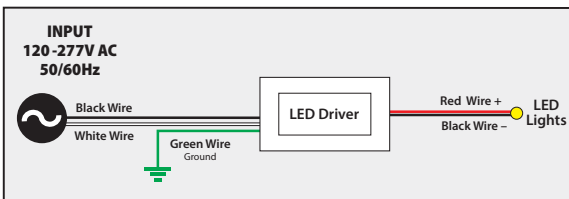


## Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver Works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC single connected to the LED power supply.

### Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

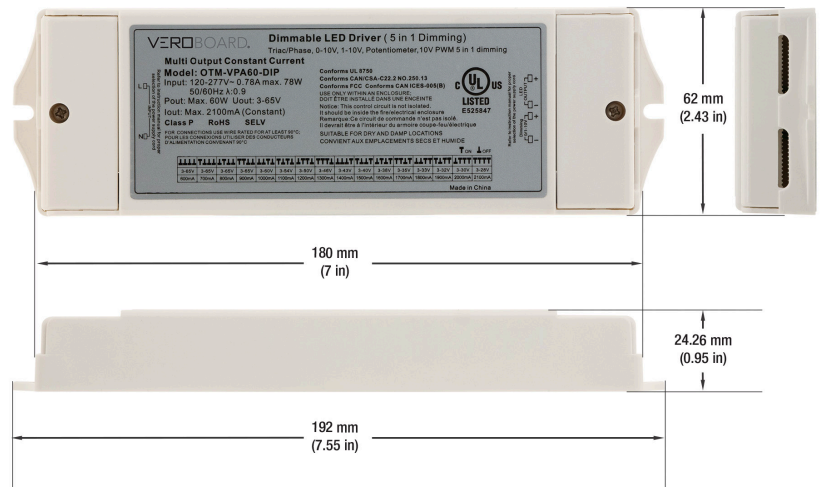

**120-277V  
60W  
CLASS P**



**SKU: 666561433772**