



SPECIFICATIONS



| | |
|------------------------|---|
| Model: | FS-4020-RGB-90-5-NS (Side Emitting) |
| Color Temperature: | RGB |
| LED Type: | 4020 SMD |
| Chip Type: | SK6812 |
| LED Qty: | 90 LEDs per meter |
| Input Voltage (VF): | 5V DC |
| Power: | 9W per meter (3W/ft) |
| IC Driver: | V6842 (Built-in) |
| Lifespan: | >50,000 hours |
| PCB: | 4oz PCB, Double-side, white colour 8mm width |
| IP Rating: | IP20 (Indoor use only) |
| Rendering Index (Ra): | CRI>95 |
| Beam Angle: | 120° |
| Dimmable: | Yes |
| Cut Size: | 11.45 mm (0.45") |
| Operating Temperature: | -40°C to +60°C |
| Dimensions: | 5,000mm x 8mm x 2.7mm (196.8" x 0.31" x 0.1") |
| Certificates: | UL / RoHs |
| Roll Length: | 5 meter roll (16.4ft) |



SKU: 666561425418



Wiring must be performed only in the direction indicated by the black arrows on the strip.

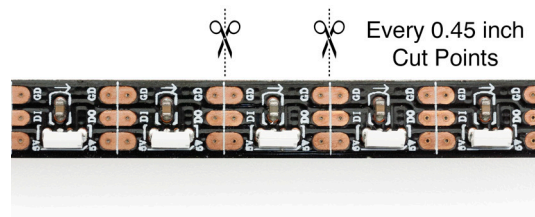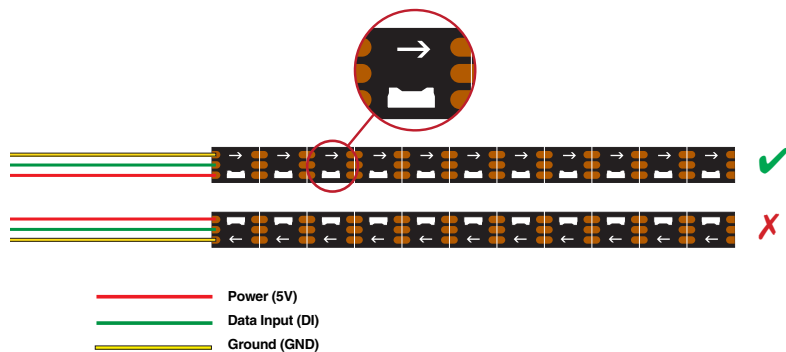

Disclaimer

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall LED Lights and Parts be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.