

VEROBOARD®


LED Type: VBDCFS-5050-RGB+3.2K-96-24-NS
Colour: RGB+3200K (Warm White)



DESCRIPTION

Flexible 12 mm wide linear LED strip. Available in 4 meter (157.5 inches) rolls that can be cut every 6 LEDs (62 mm or 2.45 in). The LED Strip lights are manufactured with high-quality materials and designed for professional lighting. Every strip light begins with a heavy-duty dual-core copper printed circuit board (PC Board), which is then soldered with an array of chips and color options. They can be cut to any size (marked interval points) and rejoined by soldering.

DIMENSIONS

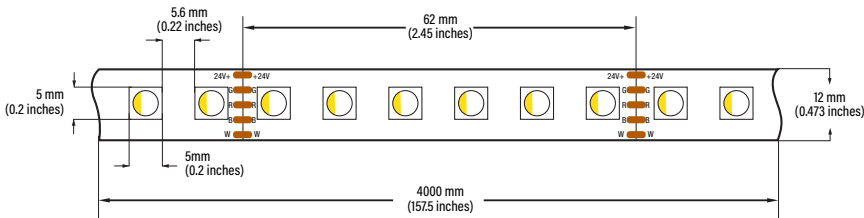

SPECIFICATIONS

Model:	VBDCFS-5050-RGB+3.2K-96-24-NS
Color Temperature:	RGB+3200K (RGB+Warm White)
LED Type:	5050 SMD
LED Qty:	96 LEDs per meter
Input Voltage (VF):	24V DC
Power:	18W per meter (5.5W/ft)
Brightness:	2000-2400 MCD for RGB & 500Lm/m (152Lm/ft) for Warm White
Lifespan:	>50,000 hours
PCB:	4oz PCB, Double-side, white colour 12mm width
IP Rating:	IP20 (Indoor use only)
Rendering Index (Ra):	CRI>95
Beam Angle:	120°
Dimmable:	Yes
Cut Size:	Every 6 LED chips (2.5 inches)
Operating Temperature:	-15°C to +40°C
Dimensions:	4,000mm x 12mm (373.2in x 0.47in)
Certificates:	UL / RoHs
Roll Length:	4 meter roll (13.1 feet)

Contact Name: _____

Company: _____


Phone: _____

Email: _____

	Wattage	Brightness
Per Foot	5.5W/ft	152Lm/ft
Per Meter	18W/m	500Lm/m



666561420178

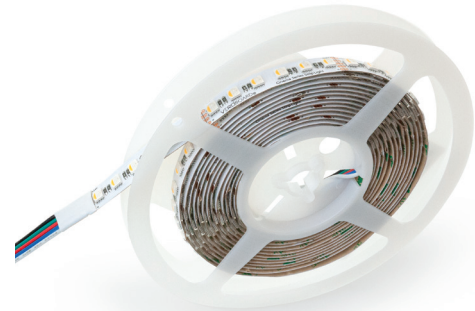

ORDERING GUIDE

Example part number: **VBDCFS - 5050 - RGB+3.2K - 96 - 24 - NS**

MODEL	SERIES	COLOUR	LEDS/METER	VOLTAGE	LENGTH
VBDCFS	5050	RGB+3.2K	96	24V	XXXX

Custom Length
 NS (Full Roll 4 Meter)



For more information about our products and services, please visit our website: www.veroboard.com


Light Measurement Report

Print date: 2023-05-02

Measurement date and time: 2023-05-02 1:04:25 PM – Measurement no. VFR-230502-0198-MS

Luminous Intensity diagram

Unit: 0-100% of peak intensity

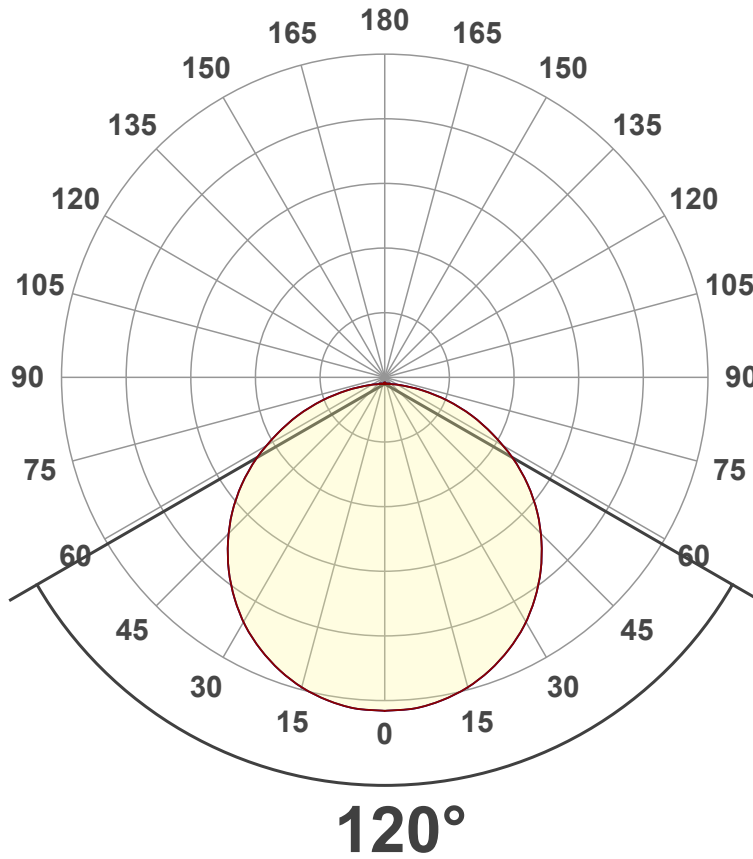

Main Values

Lumen Up% / Down%	0.51% / 99.49%
Peak Intensity	12.0 cd
Beam Angle (50%)	120°
Beam Angle (90%)	115.6°
Beam Angle (10%)	115.6°

Cut-off Angle

Average 2,5%	176.4°
--------------	--------

Field Angle


Average 10%	163.4°
-------------	--------

Intensity Ratio

In 120° cone	77.4%
In 90° cone	52.2%

C000-C180
C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

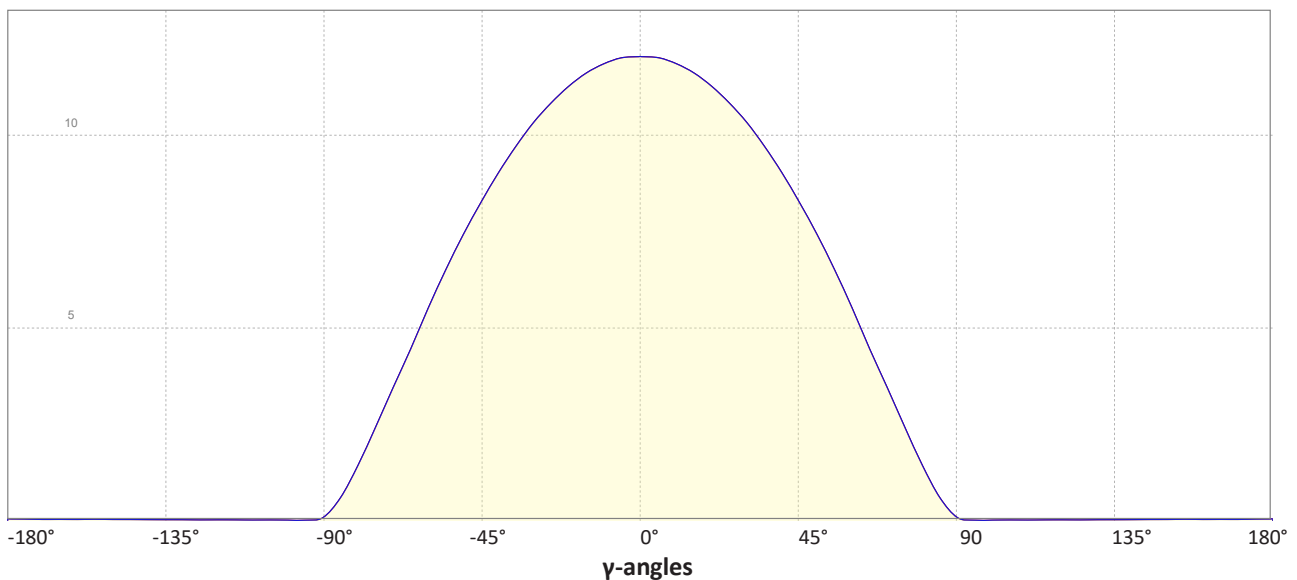

Light Measurement Report

Print date: 2023-05-02


Measurement date and time: 2023-05-02 1:04:25 PM – Measurement no. VFR-230502-0198-MS

Color details


Correlated Color Temperature, Target CCT = 3200 K
 Correlated Color Temperature, Measured CCT = 2996 K
 Color Rendering Index CRI 97.7
 Color Rendering Index, R9 (red component) R9 = 97.9
 Color Rendering TM30-18 R_f 94.9 – R_g 102.5
 Color Quality Scale CQS = 95.1

MacAdam Steps SDCM = 6.6
 Color coordinates CIE 1931 (x;y) = (0.424;0.399)
 Color coordinate CIEs 1960 (u';v') = (0.244;0.345)
 Color deviation from BBL Duv = -0.0028
 Color coordinate CIEs 1976 (CIELUV) (u'';v'') = (0.244;0.244)


CIE 1931

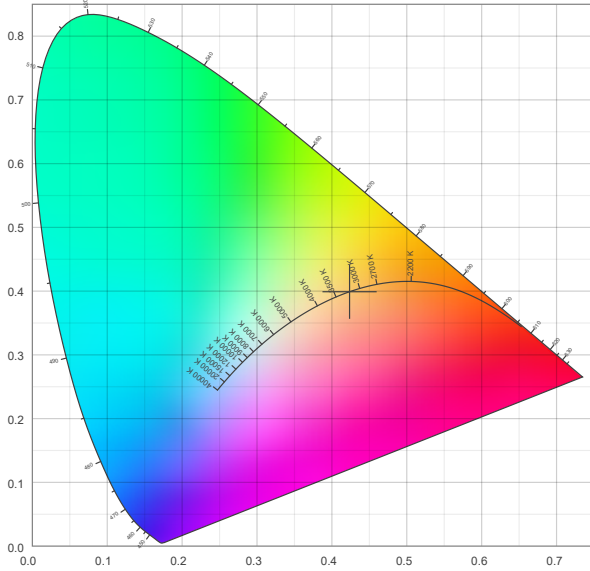

CIE 1931 – zoomed on Planckian locus

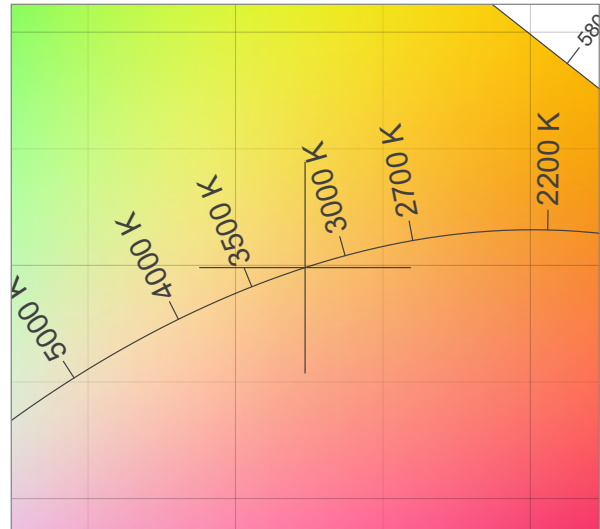


Color Rendering Index per reference color (CIE 1995)

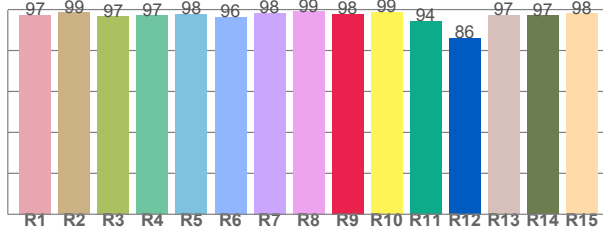


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.4	98.6	96.8	97.2	98.0	96.3	98.3	99.2	97.9	98.8	94.5	86.1	97.4	97.1	98.0

Spectral power distribution (SPD) / W/nm – 0-100%

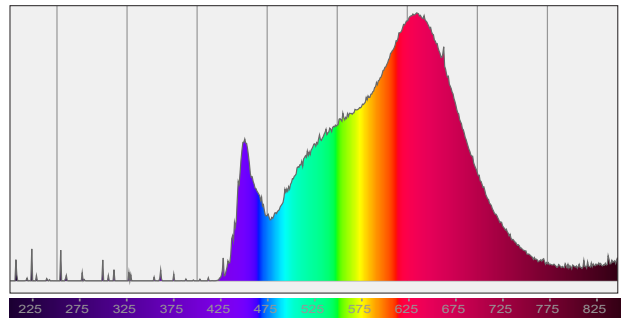


TM30-18 Rf-values per hue bin

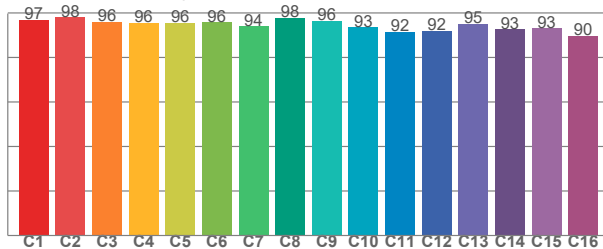

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.9	98.0	96.1	95.5	95.5	95.9	94.0	97.8	96.4	93.5	91.5	92.0	95.2	92.7	93.2	89.8

Color Quality Scale by reference color

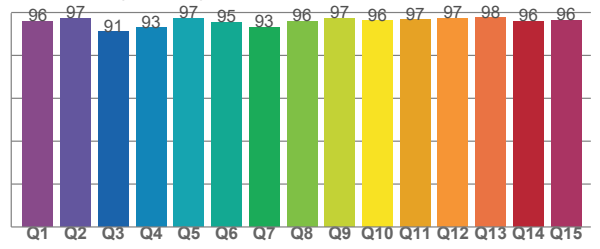

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
95.9	97.3	91.1	92.8	97.2	95.4	93.1	95.9	97.2	96.1	96.7	97.4	97.6	95.8	96.4

Light Measurement Report

Print date: 2023-05-02

Measurement date and time: 2023-05-02 1:04:25 PM – Measurement no. VFR-230502-0198-MS

Beam Details

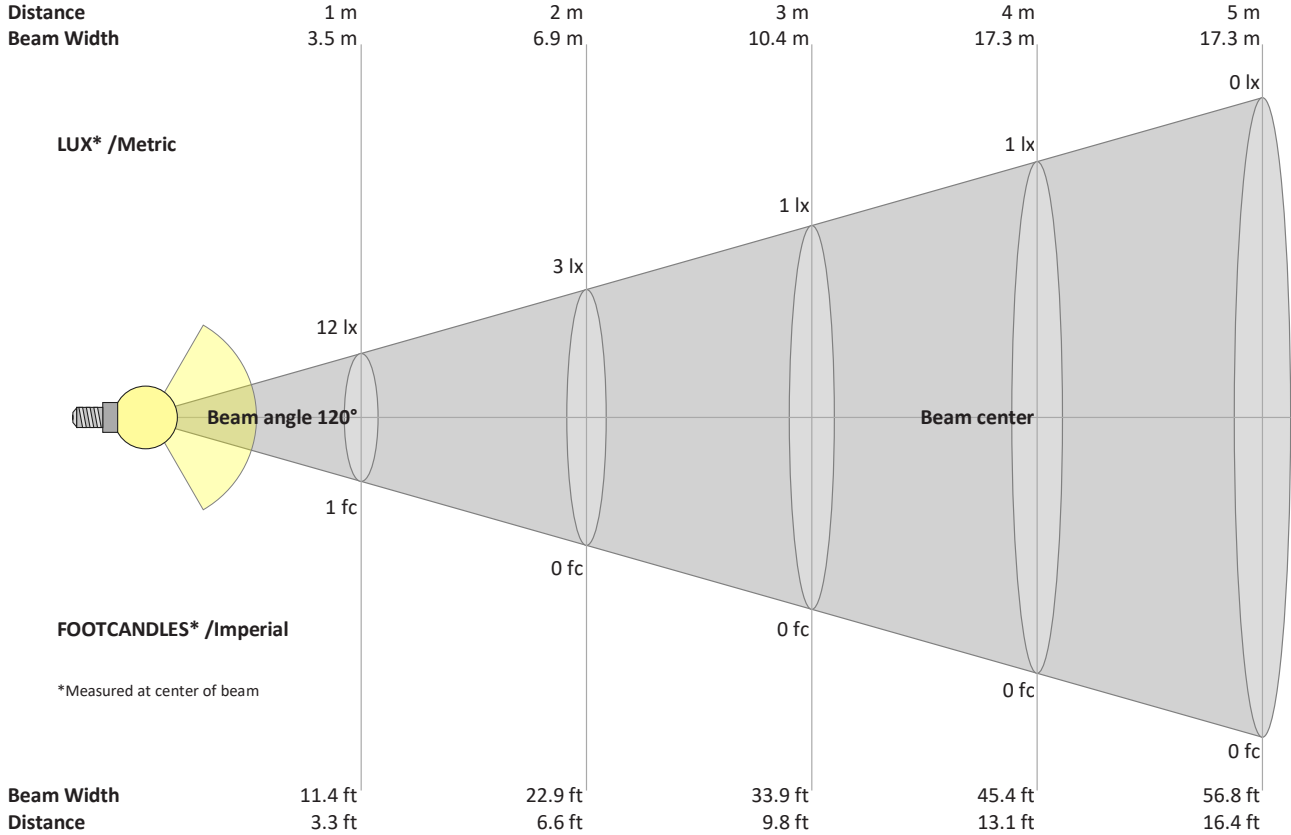

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m	
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft	
12	3	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	lux
1.1	0.3	0.1	0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
12.0	12.0	11.9	11.6	11.3	10.9	10.4	9.8	9.1	8.3	7.5	6.6	5.6	4.5	3.5	2.5	1.5	0.7	0.1	0.0	cd
100%	100%	99%	97%	94%	90%	86%	81%	75%	69%	62%	55%	46%	38%	29%	21%	12%	5%	1%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
12.0	12.0	11.9	11.6	11.3	10.9	10.4	9.8	9.1	8.3	7.5	6.6	5.6	4.5	3.5	2.5	1.5	0.7	0.1	0.0	cd
100%	100%	99%	97%	94%	90%	86%	81%	75%	69%	62%	55%	46%	38%	29%	21%	12%	5%	1%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
12.0	12.0	11.9	11.6	11.3	10.9	10.4	9.8	9.1	8.3	7.5	6.6	5.6	4.5	3.5	2.5	1.5	0.7	0.1	0.0	cd
100%	100%	99%	97%	94%	90%	86%	81%	75%	69%	62%	55%	46%	38%	29%	21%	12%	5%	1%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	y
12.0	12.0	11.9	11.6	11.3	10.9	10.4	9.8	9.1	8.3	7.5	6.6	5.6	4.5	3.5	2.5	1.5	0.7	0.1	0.0	cd
100%	100%	99%	97%	94%	90%	86%	81%	75%	69%	62%	55%	46%	38%	29%	21%	12%	5%	1%	0%	of 0°val