


Detention: Basin/Bubbler Outlet

The water efficient Detention tapware series have been designed to provide a high level of security with the inclusion of vandal resistant features. The Detention range is constructed from dezincification resistant (DR) brass.

Incorporated is a smooth clean line chrome plated finish, which eliminates horizontal surfaces. The conical handle utilises a ceramic disc quarter turn valve whilst the push button unit activates a self-closing or time flow valve as specified. An anti rotation pin is incorporated to inhibit tampering.

Product Codes

DET617 Detention Basin/Bubbler Outlet

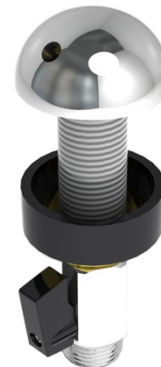

KEY FEATURES

- Integrated flow control valve allowing for in-situ adjustment to flow pattern
- Suits flow rates below 4 litres per minute
- Smooth clean line chrome plated finish, which eliminates horizontal surfaces
- Anti-ligature design

PRODUCT CODE


DET617	DETENTION BUBBLER OUTLET COLD ONLY
--------	------------------------------------



Due to ongoing Research and Development, specifications may change without notice.
Component specifications may change on some export models.
Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

Finish	Chrome
Maximum Working Pressure	500kPa
Inlet Connection	15 mm (Ω") BSP
Technical Notes	Inlet Connection 15 mm (Ω") BSP
	Maximum Working Pressure (AS/NZS 3500)*:500 kPa*
	Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.
	Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

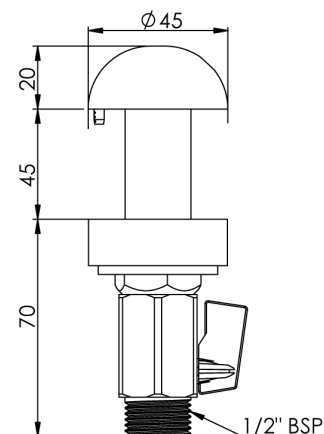

SPARE PARTS

ESP004	Spare Parts: Eye Wash Volume Control 1/2 Inch
MIS517	Spare Parts: 15Mm Bsp Flanged Backnut Brs
MIS589	Mini Regulator Vlv 15Mm M&F

Version 02 July 2023

1300 369 273 | info@enware.com.au | enware.com.au

ENWARE
A WATTS Brand