Dimplex®

IgniteXL® Bold

50" Linear Electric Fireplace

XLF5017-XD



This modern, built-in fireplace creates the illusion of incredible depth, while advanced controls maximize enjoyment and allow you to add your own personalized touch. With industry leading flexible installation options in one design; or make a bold statement and connect multiple units together for a grand, modern masterpiece.







IgniteXL® Bold 50" Linear Electric Fireplace

XLF5017-XD

Hidden Touch Controls Built-in touch controls include settings and temperature displays that are hidden when not in use. 60.7 cm **BAY** 50-1/2" 128.4 cm 12-1/8" Customizable installation options:







Media Bed Color Themes















Mood-maker Remote

Customize the flame/media color and intensity for a fireplace that reflects your personality.

120 Volts | 1,500 Watts | 5,000 BTU | 12.5 Amp 240 Volts | 2,500 Watts | 8,530 BTU | 10.4 Amps

Model #	Description		UPC	Wty.	Carton Dimensions (WxHxD)		Cube	
		Kg			inches	cm	Ft³	M ³
XLF5017-XD	50" Linear Electric Fireplace		781052 137226	5 yr.				
XLFXDPLUG	Plug Kit							
XLFXDLINK	Linking Bracket for Modular Installation							

Features

Multi-Fire® XD Flame Effect

Vivid flames that are brighter and more lifelike day or night, featuring a new multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of five presets.

Media Accent Color/Top Light Customize the fireplace interior by adjusting the media bed and top light select from a range of preset colors or scroll through Prism mode and freeze on your favourite look.

Modern Media Bed A stylish multi-media bed includes small and large acrylic crystals with naturallooking driftwood.

Bigger, Better Viewing Elevate fireplace enjoyment with an impressive 16" (40.6 cm) high viewing area.

Comfort\$aver® Heating System Concealed heater with safe ceramic heat, plus 11% energy savings, warms up to 1,000 sq. ft.

Eco/Heat Boost Eco reduces the wattage range to maintain a comfortable heat setting, while boost quickly warms a room using maximum heat output for up to 20 minutes.

Air Circulation Mode A smart feature that moves room air to keep it fresher.

Ambient Light Sensor Automatically adjusts firebox light to suit the room day to night.

Built-in Timer Set timer to automatically shut off the fireplace after a preset time, up to 8 hrs.

Heat Management Enjoy the ambiance of a fire during the warmer months by deactivating the heater via the controls or hard disconnect the heater during installation when heat is not required.

Smart Self-Diagnostics Integrated smart technology that works behind the scenes to enhance the performance of your fireplace by providing maintenance and operation feedback.

Hardwire or Plug-in Designed to be direct-wired to a 120 or 240 volt circuit for a seamless look (optional plug kit available).

Specifications, finishes and dimensions are subject to change. †Limited warranty. @2021 Glen Dimplex Americas.


SF-536-R01-030121

Dimplex®



Modular Installation

XLF-XD Series

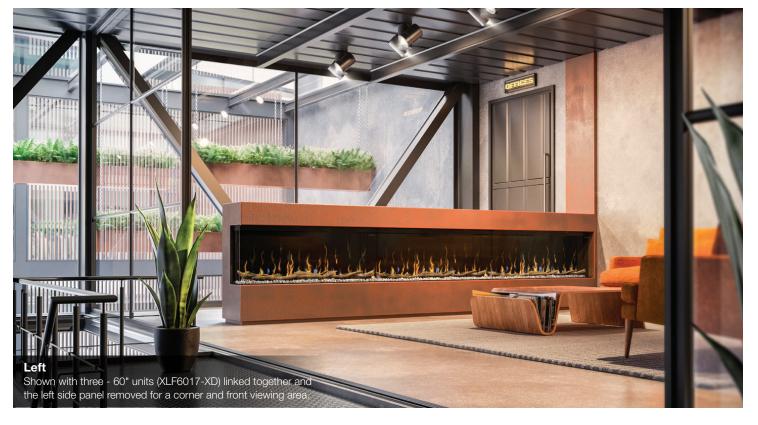

To get a dramatically oversized fireplace that makes a lasting impression, use the linking kit and combine multiple units in a series to achieve your desired length.



IgniteXL Bold versus Modular Gas

- Showcase your bold statement of a fireplace with or without the heat - you'll have more heat than you need
- Electric fireplaces convert 100% of input energy to heat, reducing the environmental impact and increasing energy efficiency
- No combustion, no carbon monoxide, front glass that is cool to the touch, and you can even deactivate the heater
- No venting or piping required and the unit can be placed anywhere a standard electrical outlet or connection exists












IgniteXL® Bold 50" Linear Electric Fireplace

XLF5017-XD

Product Dimensions:

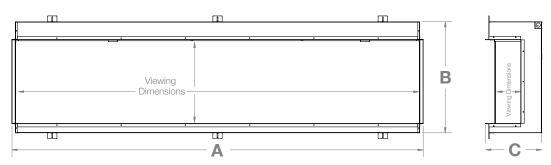


Product	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxHxD (in/cm)
XLF5017-XD	50-1/2 (128.4)	23-7/8 (60.7)	12-1/8 (30.5)	48-7/8 x 16-1/4 x 5-1/2 (124.2 x 41.4 x 14.0)

Framing Dimensions:


Width	Height	Depth (mininum)		
Α	В	С		
49-1/2"	24-1/4"	11-5/8"		
125.7 cm	61.6 cm	29.5 cm		

The dimensions are the same for single-sided, two-sided, or three-sided installations.






Right/Left Corner Installation



Front Installation



CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.

NOTE: Wiring is performed at the top right back corner of the firebox. Plan the framing to allow routing the power cable to this location.

NOTE: It is recommended that the bottom of the unit be mounted between 20 in. and 40 in from the ground to maintain an optimized viewing angle of the flame.

