

Realistic



The Realistic gas log fire is without question, one of the best premium gas fireplaces in the market. It is our deluxe model and boasts a sharp, modern, stylish appearance, framing an enormous landscape glass viewing area.

It's quality in both cutting edge aesthetics and superior performance is unsurpassed and will add value, style, ambience and that wow factor to any home. The Illusion Realistic Gas fireplace attains a level of realism others can only aspire to. The Illusion Realistic gas log fire can heat up to 160 sq metres, creating a warm and cosy environment in your home.

Australia's Leading Gas Log Fire Manufacturer

CERTIFICATION

IAPMO-R&T OCEANA

Certificate Holder: Illusion Australia Pty. Ltd.

145 South Gippsland Hwy. Dandenong South Vic 3175

ABN: 35005 834 784

Certificate Number: GMK 10363 **Issue Date:** 21/4/2017

Manufacturer:


A.G.Building Developments Pty. Ltd.


| Distributor: | | Brand Name: | Model ID: | Gas Type | MJ/h |
|--------------|----------|--------------------|-----------|----------|------|
| | ILLUSION | REALISTIC | 5000L | NATURAL | 45 |
| | ILLUSION | REALISTIC | 5000L | LPG | 42 |


All Illusion Realistic Gas Log Fires have been tested and approved to AS: 4558

Chief Executive Officer of the IAPMO Group This GasMark Schedule supersedes all previously issued Schedules

DIMENSIONS

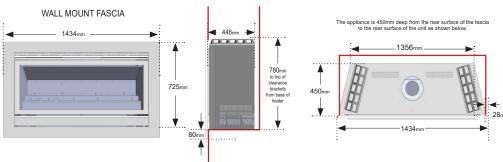

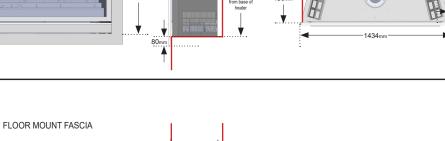

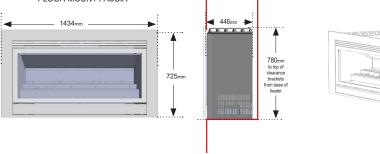

Please note: Realistic gas log fires can be installed as either wall mounted or floor mounted. The Flue system must be installed by an Authorised installer. Some installations may require the provision of a hearth to protect the floor from radiant heat. Contact your Illusion dealer for more information.

dealer before commencing any building works or installations of these appliances. A slight reduction in performance may result if high ceilings, large glass greas or lack of insulation are present. Ultimate reserve the right to after specifications without notice. Photos are for illustrative purposes only. Some colours may vary due to the printing process.



FRAME CUTOUT


Realistic 5000L Frame and plaster cutout dimensions. NOTE: Minimum frame depth 550mm.

The frame cutout dimensions are shown at right. Cutout size 1390mm wide and 785mm high 785mm

1390_{mm}




at right.



TYPICAL REALISTIC VERTICAL FLUE INSTALLATION APPROVED GAS COWL ning (Supplied by Note: All flue pipes including the active inner pipes must be fitted with the crimped end facing up. FLUE PIPE Plaster or similar wall facing with timber or metal framing from the outer flue case to combustible The recommended materials is 10mm minimum distance from minimum distance from the top of the appliance to the underside of any combustible material ie: framing timber, is 50mm provided that the gap between the active flue pipe and any combustible material is a minimum of 25mm, or the mum of 25mm, or the gap between the outer case and any combus-tible material is a mini-mum of 10mm. REALISTIC ALL REALISTIC GAS GAS FIRE LOG FIRES MUST BE INSTALLED IN AS-NZS 5601

INSTALLATION

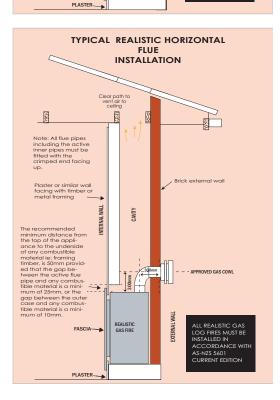

www.illusionfires.com.au

The dimensions, etc quoted here are correct at the time of writing but may be subject to change. Please check with your