





Maia is the ideal choice for all dentists searching for a professional LED lamp, a reliable solution, long lasting and with high-level lighting technique performance at a competitive price.

HIGH DEFINITION OF THE LUMINOUS SPOT

The accurate definition of the MAIA dental lamp **luminous spot** eliminates the risk of glare, safeguarding the eyes of patients and medical team.

The FARO reflective light exclusive patented optical project avoids direct exposure to the two LED sources used. The 258 small reflecting facets of each reflector guarantee a completely uniform lighted field of 170 x 95 mm.



DIMENSION OF THE SHARP REQUIRED BY STANDARDS: Ø 12 MM



MAIA SCIALYTIC EFFECT GENERATES AN ELLIPSE OF ONLY 9X6 MM

TECHNOLOGY AND DESIGN

THE LED TECHNOLOGY

(LIGHT EMITTING DIODE)

LED technology is present and future lighting, low maintenance cost, high energy efficiency up to 50.000 hours of use.

PROGRESSIVE ADJUSTMENT AND MEMORIZATION OF ILLUMINANCE

The electronic control of the illuminance, activated by joystick or sensor, adjusts the light from maximum to minimum power without any interruption, keeping the colour temperature constant. Automatic memorization of used light intensity, also after switching off the unit's power or after the 'rinse' function.




Perfect balancing of the **2D system rotating** on the two axis of the head.

As an option, there is a 3D system rotating on a third axis that makes it possible to achieve better positioning of the light beam.

INSTALLATION

Thanks to a wide range of applications MAIA is available for WALL, CEILING and FLOOR mounting.

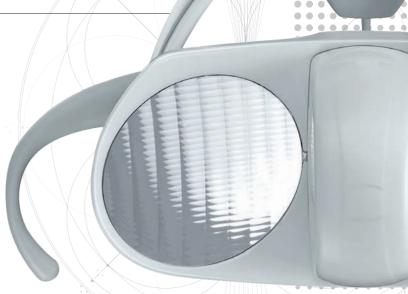

LED TECH TECHNOLOGY





THE PROGRESSIVE ILLUMINANCE ADJUSTING

HANDLES REMOVABLE AND AUTOCLAVABLE







2D ROTATION OR 3D AS AN OPTION

TECHNICAL FEATURES

TECHNICAL SPECIFICATIONS*	MAIA
POWER SUPPLY WITH TRANSFORMER	230 Vac +/- 10% - 50/60 Hz
POWER SUPPLY WITH/WITHOUT POWER PACK	90-264 Vac - 47-63Hz / 17-24 Vac - 50-60 Hz 22-35 Vdc
ABSORBED POWER	Max 9 VA
LUX	From 3.000 (*) to 45.000 (**) (from the distance of 700 mm)
Rf	91 (*) / 5000 K (*)
LIGHTING SPOT	170 x 95 mm (from the distance of 700 mm)
COOLING SYSTEM	Static heat sink (no fan required)

Medical Device - class 1

Limited Warranty. Check the general conditions of sale and user manual. *(The above specifications are typical values subject to tolerance)

** (Maximum values measured on a representative sample)





INFO LINE:



FARO S.p.A.

Via Faro, 15 - 20876 Ornago (MB) Italy Tel. +39 039.68781 www.faro.it export@faro.it **FARO FRANCE**

Avenue de l'Europe - 71 210 ECUISSES France Tel. +33 385.779680 www.farofrance.com farofrance@farofrance.com **FARO DEUTSCHLAND GMBH**

Gewerbepark Heideckhof Heideckstr. 179 D-47805 Krefeld - Germany Tel. +49 2151.936921 www.farodeutschland.de info@farodeutschland.de