



# How to Make the Bundle Bag

by Arouna Khounnoraj of bookhou

## WHAT YOU NEED

A - Bag body: 2 exterior and 2 lining (15.5" H x 12" W) with a 3" gusset cut on each side.

\* Optional: Use iron-on interfacing to add more structure - 2 pieces cut at the same dimensions above.


B - Handles: 2 x (4" H x 21" W)

\*Optional: Use iron-on interfacing to add more structure - 2 pieces cut at the same dimensions above.

Snap buttons x 4


Ruler

Sewing machine, iron, scissors, and pins

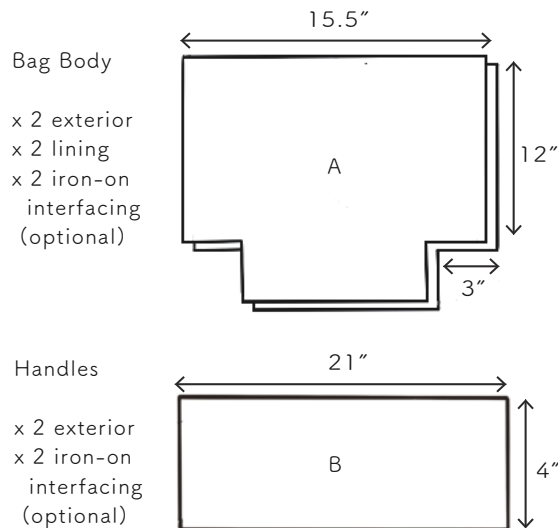


## HOW TO MAKE

### 1. Assemble the exterior bag body and make the gussets.

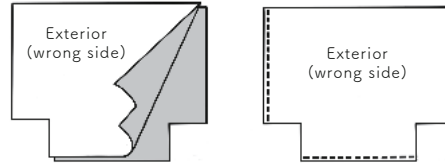


A) Place the outer two fabric pieces on top of each other with the right sides facing each other and edges aligned and sew around the three sides leaving the top unsewn, using a 3/8 of an inch seam allowance.

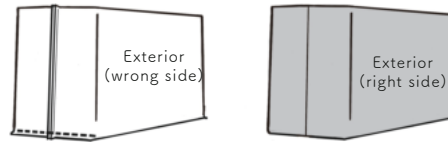


B) Place the outer two fabric pieces on top of each other with the right sides facing each other and edges aligned and sew around the three sides leaving the top unsewn, using a 3/8 inch seam allowance.

### 2. Assemble the lining bag body and make the gussets.

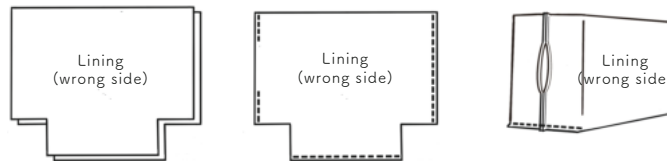


Follow the instructions in step 1 to sew the lining, except leave a 4" opening midway along one side. Leave right sides facing in.

### 3. Attach the bag body lining to the bag body exterior.




A) Place the outer part of the bag inside the lining so that good sides are facing each other. Make sure the top edges and seams are aligned.

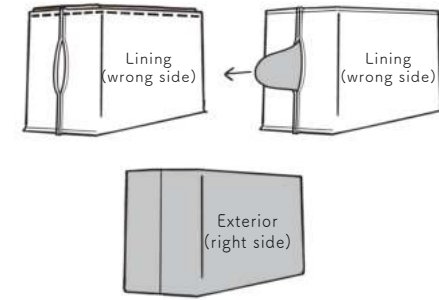


B) Sew the pieces together along the entire top edge of the bag with a 3/8 inch seam allowance. Pull the bag good sides out through the unsewn gap in the lining and then sew the gap closed using a sewing machine very close to the edge, or by hand.

### 4. Make the handles

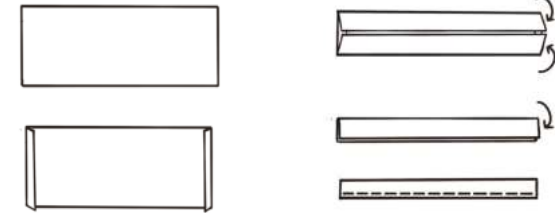

Fold both short ends of the straps about a 1/4 of an inch, then fold and iron the raw edges on the long side twice. Sew a top stitch along the two folded edges with your sewing machine or sew a blind stitch by hand if you want to hide the top stitch. Repeat for the second handle.

### 5. Attach the tool roll body exterior piece to the body.

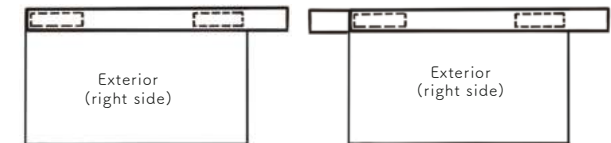

Position both handles at the top edge of the bag, securing them from one side seam and extend it beyond the opposite seam for an overhang. Repeat the process on the other side with the second strap, ensuring overhangs are on opposite sides. Sew the handles along the edges, covering approximately 4.5 inches from both sides, leaving a 6-inch unsewn area at the center for the handle. Attach two snap buttons to both overhang pieces, forming a handle when snapped together.



FINISHED!