


High quality film capacitor for audio

AMCH series

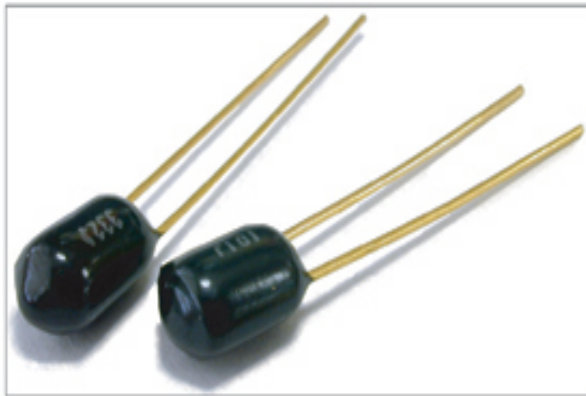

■ Features

- Polypropylen film capacitor with foil electrode
- Gold plated Pb free OFC lead wire
- Optimum material and structure for digital audio products, such as CD/SACD players
- Superior frequency response and temperature characteristics
- Meets RoHS requirements

■ Construction and Materials

Category temperature range	-40°C~+85°C
Rated voltage	100VDC(2A)
Rated capacitance range(pF)	100~6800
Rated capacitance tolerance	± 5% (J)
Dissipation factor	< 0.1%(at 1KHz 20°C)
Insulation resistance	> 45,000MΩ (at100VDC)
Body	Epoxy resin (Black)

Type	pF	Type	pF	Type	pF
101	100	681	680	272	2700
181	180	821	820	332	3300
221	220	102	1000	472	4700
331	330	122	1200	682	6800
471	470	152	1500		
561	560	222	2200		

PARTS CONNECTION



Dimension

(pF)	D	H	P	d
100	6.5	9	5	0.5
150				
220				
330				
470				
680	7	9.5		
1000				
1500				
2200				
3300				
4700				
6800				

