



PARTS CONNECTION

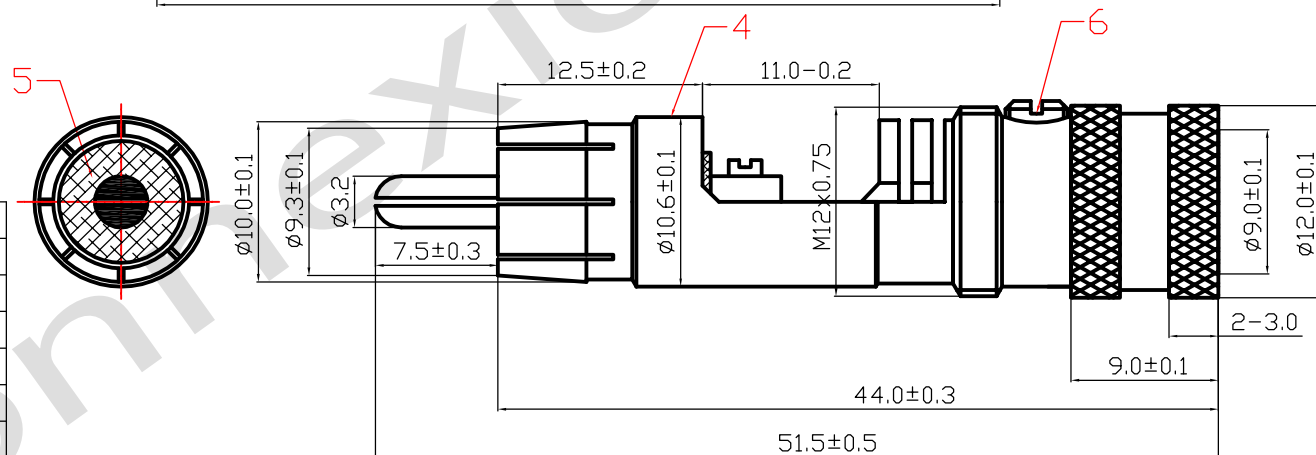

CONNEX-53454

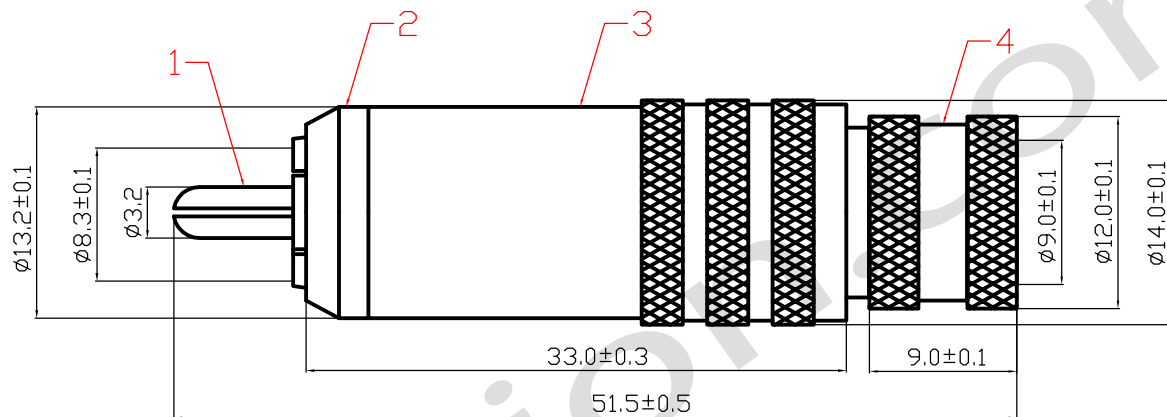

ELECTRICAL CHARACTERISTIC	
(1)	INNER CONTACT RESISTANCE:<10m Ω
(2)	OUTER CONTACT RESISTANCE:<2.5m Ω
(3)	WITHSTAND VOLTAGE:DC1500V
(4)	CURRENT RATING:3A/DC1500V
(5)	OPERATING TEMPERATURE:-30/+60°C

6	SCREW	BRASS
5	DIELECTRIC	POM
4	BODY	BRASS
3	SHELL	BRASS
2	FERRULE	BRASS
1	PIN	BRASS

ITEM	DESIGNATION	MATERIAL	
REV	PART NO.& SAMPLE NO.	DATE	BY
A	JR 0530		
B			

TOLERANCE		SIGNATURES		DATE
0 - 10	±0.05	DRAFT:		
10 - 99	±0.5	CHECKED:		
100 - 999	±10.0	APPROVAL:		
1000 - 9999	±100.00	SCALE	UNIT	REV
10000 - 99999	±1000.00	1:1	mm	∅
SHEET		TITLE		RCA Phone Plug,Screw Type Tin Plated–Nickel,Gold Plated For 8,9mm Cable.Ring:Red,Black
OF		CUSTOMER		