
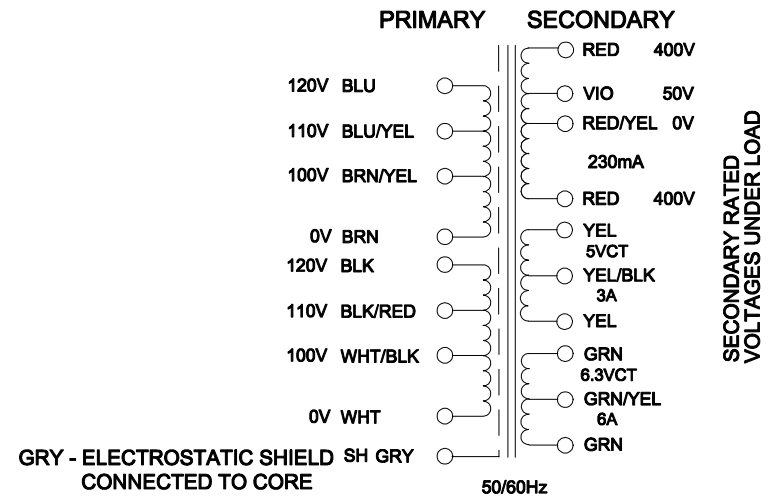


DIMENSIONS:	
A	3.750" ±0.063
B	4.188" ±0.125
C	4.560" ±0.063
D	3.000" ±0.063
E	3.063" ±0.063
G	0.203" x 0.375" ±0.015

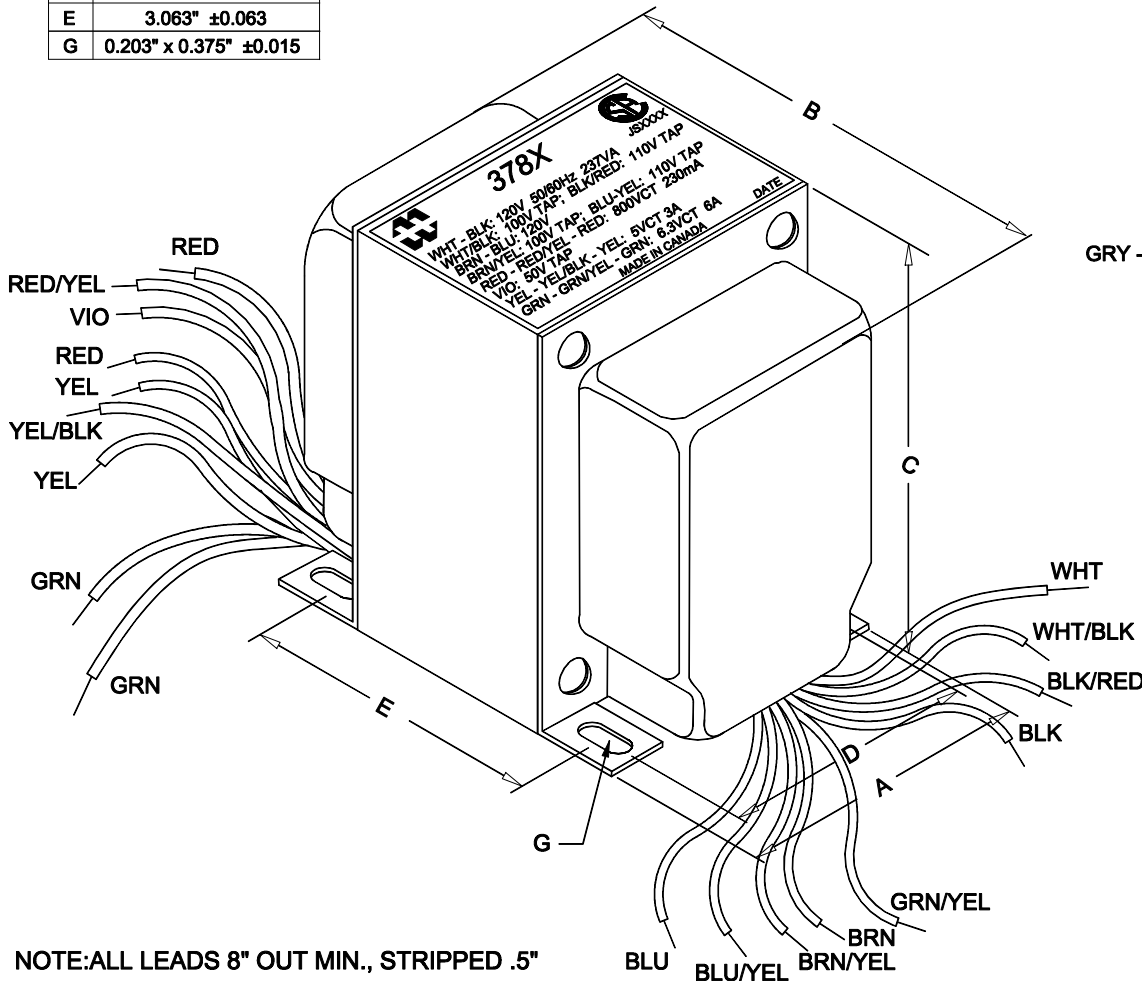

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 120V, 60Hz, WHT - BLK	70mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	WHT - WHT/BLK = BRN - BRN/YEL =	99.78V	±2%
	WHT - BLK/RED = BRN - BLU/YEL =	109.7V	±2%
	BRN - BLU =	120.0V	±2%
	RED - RED =	845.8V	±2%
	RED - RED/YEL = RED/YEL - RED =	422.9V	±2%
	RED/YEL - VIO =	52.13V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.697V	±2%
	YEL - YEL =	5.393V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.371V	±2%
	GRN - GRN =	6.742V	±2%
DCR	@ 20°C, WHT - BLK =	2.671Ω	±20%
	@ 20°C, BRN - BLU =	2.911Ω	±20%
	@ 20°C, RED - RED =	92.81Ω	±20%
	@ 20°C, RED/YEL - VIO =	5.759Ω	±20%
	@ 20°C, YEL - YEL =	0.062Ω	±20%
	@ 20°C, GRN - GRN =	0.041Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I. 01/26/17	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER
			DATE: 01/26/17	APP'D. BY:	
				DIMENSIONS: IN(X) MM()	DWG. NO. 378X