
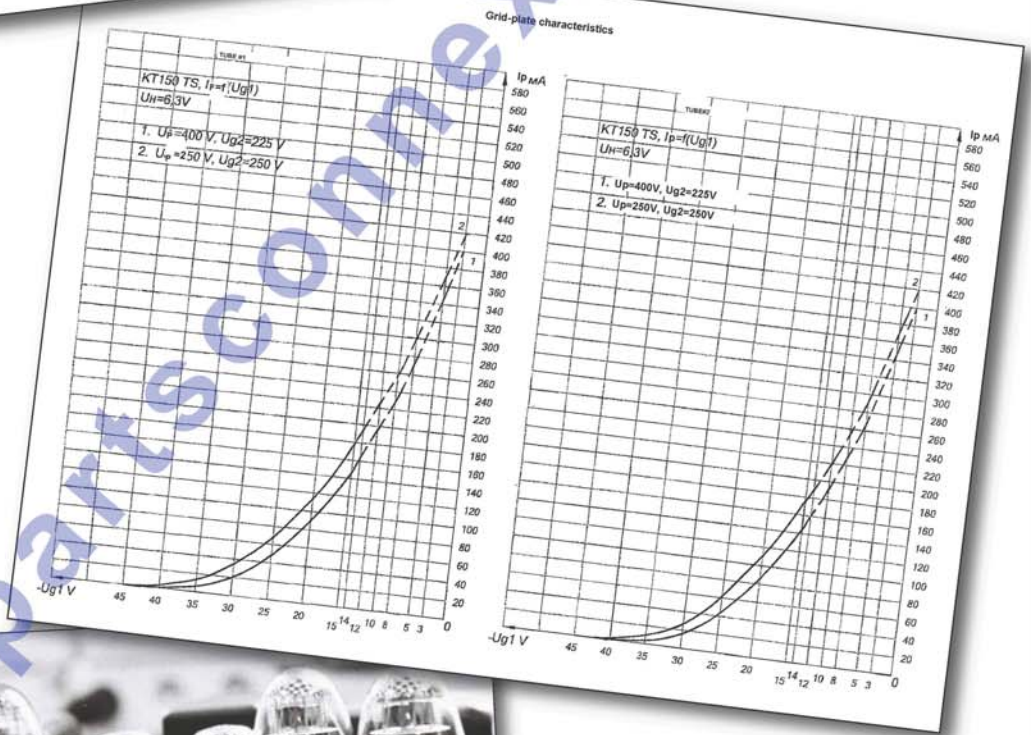


TUNG-SOL

ELECTRON TUBES

KT-150 Tube

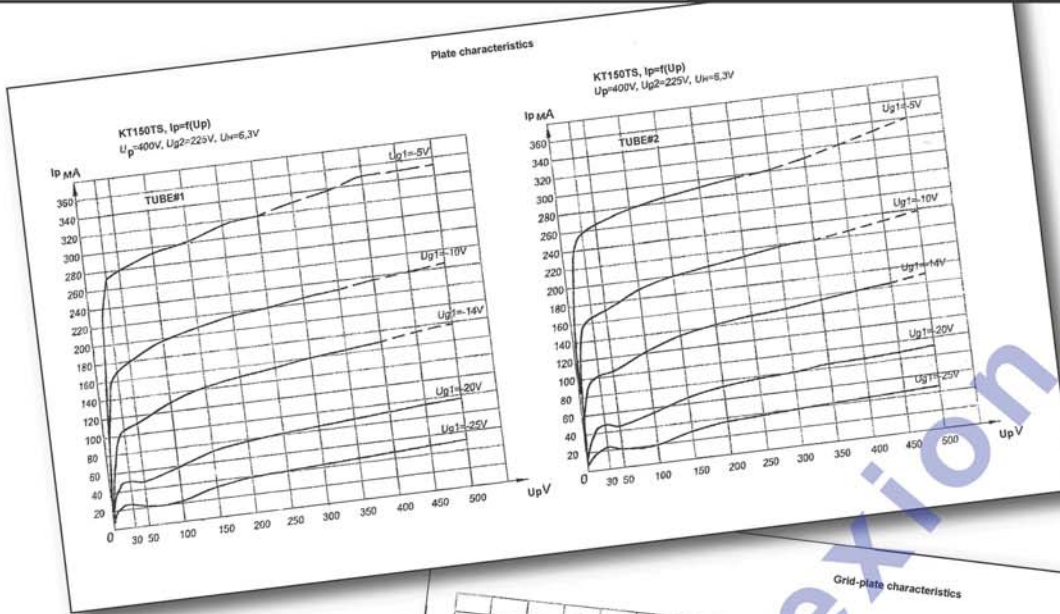

new sensor

New Sensor, 55-01 2nd Street, Long Island City, NY 11101
 Tel: 718-937-8300 Fax: 718-937-9111 www.newsensor.com

Electrical data

Cathode.....Oxide, indirect heating
 Filament voltage (AC,DC)6.3V
 Cathode to heater voltage:
 Under positive polarity at cathode300V
 Under negative polarity at cathode300V
 Interelectrode capacitance:
 Input (nominal)20.5pF
 Output (nominal).....10pF
 Transfer (nominal)1.75pF
 Tube impedance.....From 10.0MΩ to 12.5MΩ


Mechanical data

EnvelopeGlass balloon
 SocketOctal
 Operating positionAny
 Dimensions
 Maximum height.....140mm
 Balloon diameter, max60mm
 Maximum weight130g

Limiting values

	min	max
Filament voltage (AC,DC)	6.0V	6.6V
Plate Voltage, DC		850V
Grid 2 voltage, DC		650V
Grid 1 negative voltage.....		200V
Plate dissipation		70W
Grid 2 dissipation		9.0W
Cathode current.....		275mA
Resistance in grid 1 circuit		
at fixed (clamp) bias		0.51MΩ
Envelope temp. at hottest point		250°C


KT-150 Tung-Sol Terminal Connections

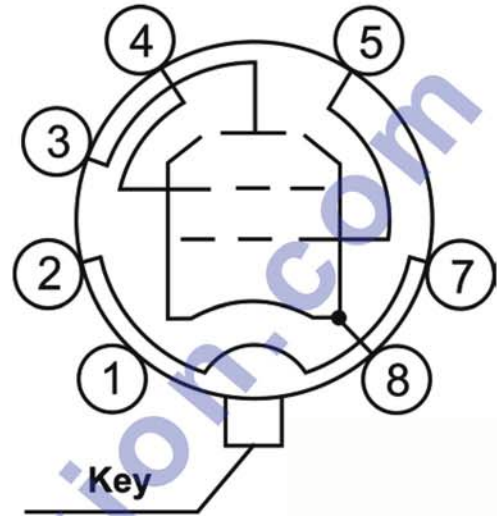

Pin #	Electrode Name
1.....	
2, 7.....	Heater
3.....	Plate
4.....	The second grid
5.....	The first grid
6.....	
8.....	Cathode, beam-forming plates

Electric characteristics at delivery

Parameter name	Norms		Measurement mode
	not less	not more	
Heater current, A	1.75	2.0	U _f =6.3V
Plate current, mA	150	180	U _f =6.3V U _a =400V U _{c2} =225V U _{c1} = -14V
The second grid current, mA	15		U _f =6.3V U _a =400V U _{c2} =225V U _{c1} = -14V
Transconductance, mA/V.....	12.6		U _f =6.3V U _a =400V U _{c2} =225V U _{c1} = -14V
Output power, W	20.0		U _f =6.3V U _a =400V U _{c2} =225V U _{c1} = -14V U _{c1eff} =9.9V load resistance=3KΩ
Non-linear harmonic distortion coefficient, %	14		U _f =6.3V U _a =400V U _{c2} =225V U _{c1} = -14V U _{c1eff} =9.9V load resistance=3KΩ

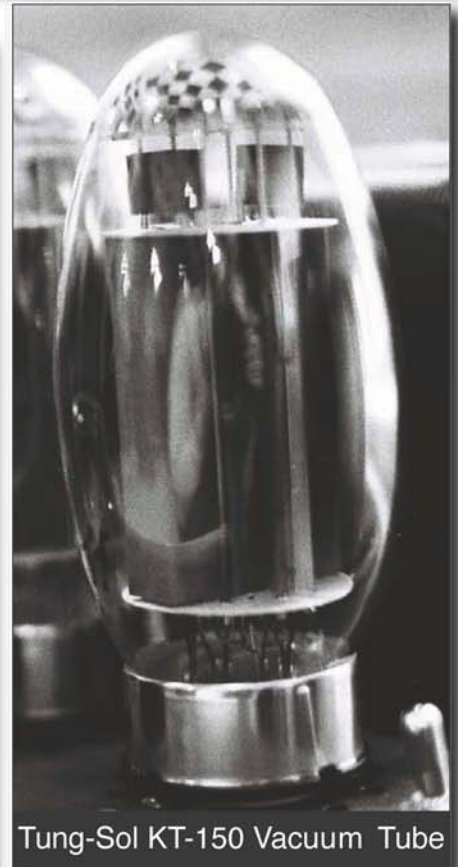

Tung-Sol KT-150 Vacuum Tube