



<b>TEST REPORT</b> <b>COMMISSION REGULATION (EU) 2019/2020 of 1 October 2019</b> <b>laying down ecodesign requirements for light sources and separate control gears pursuant to</b> <b>Directive 2009/125/EC of the European Parliament and of the Council</b>	
Report reference No.....	ZRC2307062WY-ERP-R1
Tested by.....	Test Engineer Tony zhang 
Approved by.....	Manager Robinson Xiao 
Date of issue .....	July 18, 2023
Contents.....	13 pages
<b>Testing laboratory</b>	
Name .....	ZRC INTERNATIONAL CERTIFICATION (SHENZHEN) CO., LTD.
Address .....	702, No. 28 Hualian Industrial Zone, Xinshi Community, Dalang Street, Longhua District, Shenzhen
Testing location .....	As above
<b>Client</b>	
Name .....	Haining Meichen Lighting Technology Co., Ltd
Address.....	Building 5, No. 8, Shuangbai Road, Yuanhua Town, Haining City, Jiaxing City, Zhejiang Province
<b>Manufacturer</b>	
Name .....	Haining Meichen Lighting Technology Co., Ltd
Address.....	Building 5, No. 8, Shuangbai Road, Yuanhua Town, Haining City, Jiaxing City, Zhejiang Province
<b>Test specification</b>	
Standard.....	COMMISSION REGULATION (EU) 2019/2020 COMMISSION DELEGATED REGULATION (EU) 2019/2015 COMMISSION DELEGATED REGULATION (EU) 2021/340 COMMISSION DELEGATED REGULATION (EU) 2021/341 COMMISSION REGULATION (EU) 2019/2020
Test procedure .....	COMMISSION DELEGATED REGULATION (EU) 2019/2015 COMMISSION DELEGATED REGULATION (EU) 2021/340 COMMISSION DELEGATED REGULATION (EU) 2021/341
Non-standard test method	N/A
<b>General disclaimer:</b> The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing ZRC Testing Laboratory.	

Test item Description .....	S14
Trademark .....	N/A
Model and/or type reference.....	S14
Rating(s)(V/Hz).....	230V, 50Hz, 2W
<b>Test case verdicts</b>	
Test case does not apply to the test object :	N(N/A)
Test item does meet the requirement .....	P(Pass)
Test item does not meet the requirement ...:	F(Fail)
<b>Testing</b>	
Date of receipt of test item .....	July 14, 2023
Date(s) of performance of test.....	July,14,2023 – July,20,2023
<b>Test item particulars:</b>	
<b>Type of light source:</b>	
Lighting technology used	<input type="checkbox"/> HL <input type="checkbox"/> LFLT5HE <input type="checkbox"/> LFL T5HO <input type="checkbox"/> CFLni <input type="checkbox"/> other FL <input type="checkbox"/> HPS <input type="checkbox"/> MH <input type="checkbox"/> other HID <input type="checkbox"/> LED <input type="checkbox"/> OLED <input type="checkbox"/> mixed <input checked="" type="checkbox"/> other
Non-directional or directional	<input checked="" type="checkbox"/> NDLS <input type="checkbox"/> DLS
Mains or non-mains	<input type="checkbox"/> MLS <input checked="" type="checkbox"/> NMLS
Connected light source (CLS)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Colour-tuneable light source	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Envelope	<input checked="" type="checkbox"/> No <input type="checkbox"/> second <input type="checkbox"/> non-clear
High luminance light source	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Anti-glare shield	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Dimmable	<input type="checkbox"/> Yes <input type="checkbox"/> only with specific dimmers <input checked="" type="checkbox"/> No
Control gear	<input type="checkbox"/> Integrated <input checked="" type="checkbox"/> External
Use of light source:	<input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor <input type="checkbox"/> Industry
<b>Lamp cap installed:</b>	N/A
<b>General product parameters :</b>	
Energy consumption in on-mode (kWh/1 000 h)	2
Energy efficiency class	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/> F <input checked="" type="checkbox"/> G
Rated useful luminous flux..... (lm):	160lm
Rated CCT .....	(K): 2700K
On-mode power (Pon), expressed in W.....	12

Standby power (Psb).....(W):	N/A
Networked standby power(Pnet)for CLS.(W):	N/A
Rated Ra.....:	>80
Outer dimensions.....(mm):	45*45*85
Spectral power distribution.....:	See attachment 2
Claim of equivalent power .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> N/A
Chromaticity coordinates (x and y).....:	x:0.4514, y:0.4054
Peak luminous intensity .....	(cd) : N/A
Beam angle in degrees.....(°):	N/A
R9 colour rendering index valueR9.....:	6
Survival factor.....:	90%
The lumen maintenance factor.....:	96%
Displacement factor (cos φ1).....:	0
Colour consistency in McAdam ellipses.....:	≤6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> N/A
Flicker metric (Pst LM) .....	0.002
Stroboscopic effect metric (SVM).....:	0
Rated life time .....	(h): N/A
<b>Test case verdicts</b>	
Test case does not apply to the test object :	N(N/A)
Test item does meet the requirement .....	P(Pass)
Test item does not meet the requirement ...:	F(Fail)
<b>Attachments:</b> The test report includes: ATTACHMENT 1(S) of Energy efficiency classes The test report includes: ATTACHMENT 2(S) of Spectral power distribution The test report includes: ATTACHMENT 3(S) of Photos	

**Equipment List:**

<b>Instrument</b>	<b>Equipment ID</b>	<b>Model</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Full-field Speed Goniophotometer	SLCS-S-112	GO-R5000	2023/06/20	2024/06/19
Digital Power Meter	SLCS-S-103	PF2010	2023/06/20	2024/06/19
AC Testing Power Source	SLCS-S-115	DPS1060	2023/06/20	2024/06/19
Total Spectral Radiant Flux Standard Lamp	SLCS-S-143	D908S	2023/07/27	2024/07/26
2m Integrating Sphere System	SLCS-S-038	SPR-3000	2023/06/20	2024/06/19
Digital Power Meter	SLCS-S-058	WT310	2023/06/20	2024/06/19
AC Testing Power Source	SLCS-S-111	APW-105N	2023/06/20	2024/06/19
Standard Lamp	SLCS-S-118	S11010017	2023/07/01	2024/06/30
Power Meter	SLCS-S-060	PF9800	2023/06/20	2024/06/19
Flicker Photometer	SLCS-S-119	FP-210	2023/06/20	2024/06/19

**General remarks**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

(EU) 2019/2020			
Clause	Requirement - Test	Result - Remark	Verdict
<b>Annex I (Clause)</b>	<b>Definitions in Regulation (EU) 2019/2020</b>		P
	Number of sample used for test .....	1 pcs	P
(3)	Directional Light Source		N
	at least 80 % of total luminous flux within a solid angle of $\pi$ sr (corresponding to a cone with angle of $120^\circ$ )		N
(15)	Useful luminous flux $\Phi_{use}$		P
	for non-directional light sources it is the total flux emitted in a solid angle of $4\pi$ sr (corresponding to a $360^\circ$ sphere)		P
	for directional light sources with beam angle $\geq 90^\circ$ it is the flux emitted in a solid angle of $\pi$ sr (corresponding to a cone with angle of $120^\circ$ )		N
	for directional light sources with beam angle $< 90^\circ$ it is the flux emitted in a solid angle of $0,586\pi$ sr (corresponding to a cone with angle of $90^\circ$ )		N
<b>Annex II (Clause)</b>	<b>Energy Efficiency Requirements in Regulation (EU) 2019/2020</b>		P
1.(a)	<b>Energy Efficiency Requirements – Light Source</b>		P
	On-mode Power $P_{on}$ (W):	See Appendix-Test Data Sheet	P
	Maximum Allowed Power $P_{onmax}$ (W): $P_{onmax} = C \times (L + \Phi_{use}/(F \times \eta)) \times R$	$P_{onmax}=2W$	P
	$\Phi_{use}$ :	160 lm	P
	Threshold efficacy $\eta$ (lm/W): $\eta$ for LED:	83lm	P
	End loss factor L (W) depending on light source: L for LED:	2	P
	End loss factor L (W) for connected light sources: 2.0		N
	Efficacy Factor F: 1.00 for non-directional light sources (NDLS, using total flux)		N
	Efficacy Factor F: 0.85 for directional light sources (DLS, using flux in a cone)		P
	CRI Factor R: 0.65 for $CRI \leq 25$		N
	CRI Factor R: (CRI+80)/160 for $CRI > 25$ , rounded to two decimals	$R=(70+80)/160=0.94$	P

(EU) 2019/2020			
Clause	Requirement - Test	Result - Remark	Verdict
	Correction Factor C Depending on Light Source Characteristics in Table 2		N
	Non-directional (NDLS) not operating on mains (NMLS), Basic Value: 1.00		N
	Non-directional (NDLS) operating on mains (MLS), Basic Value: 1.08		N
	Directional (DLS) not operating on mains (NMLS), Basic Value: 1.15		P
	Directional (DLS) operating on mains (MLS), Basic Value: 1.23		N
	Special Light Source Bonus on C		N
1.(a)	<b>Standby power – Light Source</b>		N
	The standby power $P_{sb}$ of a light source shall not exceed 0.5 W		N
	The networked standby power $P_{net}$ of a connected light source shall not exceed 0.5 W		N
	The allowable values for $P_{sb}$ and $P_{net}$ shall not be added together		N
1.(b)	<b>Energy Efficiency Requirements – Separate Control Gear (at full-load)</b>		N
	Control gear for LED or OLED light sources: $P_{eg}^{0.81} / (1.09 \times P_{eg}^{0.81} + 2.10)$		N
	The no-load power $P_{no}$ of a separate control gear shall not exceed 0.5 W		N
	The standby power $P_{sb}$ of a separate control gear shall not exceed 0.5 W		N
	The networked standby power $P_{net}$ of a connected separate control gear shall not exceed 0.5 W		N
	The allowable values for $P_{sb}$ and $P_{net}$ shall not be added together		N
2.	<b>Functional Requirements – Light Source (Table 4)</b>		P
	Colour Rendering Index CRI: $\geq 80$	See Appendix-Test Data Sheet	P
	Displacement Factor DF at Power Input $P_{on}$ for LED and OLED MLS:		P
	No limit at $P_{on} \leq 5$ W DF $\geq 0.5$ at $5$ W $< P_{on} \leq 10$ W, DF $\geq 0.7$ at $10$ W $< P_{on} \leq 25$ W DF $\geq 0.9$ at $25$ W $< P_{on}$	See Appendix-Test Data Sheet	P
	Lumen Maintenance Factor (for LED and OLED): $X_{LMF,MIN}\% = 100 \times e^{\frac{(3000 \times \ln(0.7))}{L_{70}}}$	See Appendix-Test Data Sheet	P
	Survival Factor (for LED and OLED): At least 9 light sources of the test sample must be	See Appendix-Test Data Sheet	P

(EU) 2019/2020			
Clause	Requirement - Test	Result - Remark	Verdict
	operational after completing the test in Annex V of this Regulation.		
	Colour consistency for LED and OLED light sources: Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.	See Appendix-Test Data Sheet	P
	Flicker for LED and OLED MLS: $P_{st} LM \leq 1.0$ at full-load	See Appendix-Test Data Sheet	P
	Stroboscopic effect for LED and OLED MLS: SVM $\leq 0.4$ at full-load	See Appendix-Test Data Sheet	P
3.(a)	<b>Information to be displayed on the light source itself</b>		P
	Useful luminous flux (lm)	83 lm	P
	Correlated colour temperature (K)	2700 K	P
	Beam angle (°) For directional light sources		P
3.(b)	<b>Information to be visibly displayed on the packaging</b>		P
3.(b)(1)	<b>Light source placed on the market, not in a containing product</b>		P
	(a) Useful luminous flux (lm): - In a font at least twice as large as the display of the on-mode power ( $P_{on}$ ) - Clearly indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		P
	(b) Correlated Colour Temperature, rounded to the nearest 100 K		P
	(c) Beam angle in degrees For directional light sources		P
	(d) electrical interface details, e.g. cap- or connector-type, type of power supply (e.g. 230 V AC 50 Hz, 12 V DC)		P
	(e) L70B50 lifetime for LED and OLED light sources, expressed in hours		P
	(f) on-mode power ( $P_{on}$ ), expressed in W		P
	(g) standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		P
	(h) networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		P
	(i) Colour Rendering Index, rounded to the nearest integer		P
	(j) Clear indication to this effect, if CRI < 80, and		P

(EU) 2019/2020			
Clause	Requirement - Test	Result - Remark	Verdict
	the light source is intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI < 80.		
	(k) Information on non-standard conditions (such as ambient temperature $T_a \neq 25^\circ \text{C}$ or specific thermal management is necessary)		P
	(l) a warning if the light source cannot be dimmed or can be dimmed only with specific dimmers or with specific wired or wireless dimming methods. In the latter cases a list of compatible dimmers and/or methods shall be provided on the manufacturer's website		P
	(m) if the light source contains mercury: a warning of this, including the mercury content in mg rounded to the first decimal place		P
	(n) if the light source is within the scope of Directive 2012/19/EU, without prejudice to marking obligations pursuant to Article 14(4) of Directive 2012/19/EU, or contains mercury: a warning that it shall not be disposed of as unsorted municipal waste		P
3.(b)(2)	<b>Separate control gears</b> For separate control gear placed on the market as a stand-alone product, not as a part of a containing product		N
	(a) the maximum output power of the control gear (for HL, LED and OLED) or the power of the light source for which the control gear is intended (for FL and HID)		N
	(b) the type of light source(s) for which it is intended		N
	(c) the efficiency in full-load, expressed in percentage		N
	(d) the no-load power ( $P_{no}$ ), expressed in W and rounded to the second decimal, or the indication that the gear is not intended to operate in no-load mode. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites		N
	(e) the standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in		N



(EU) 2019/2020			
Clause	Requirement - Test	Result - Remark	Verdict
	(f) the networked standby power (Pnet), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites		N
	(g) a warning if the control gear is not suitable for dimming of light sources or can be used only with specific types of dimmable light sources or using specific wired or wireless dimming methods. In the latter cases, detailed information on the conditions in which the control gear can be used for dimming shall be provided on the manufacturer's or importer's website		N
	(h) a QR-code redirecting to a free-access website of the manufacturer, importer or authorised representative, or the internet address for such a website, where full information on the control gear can be found		N
3.(c)	<b>Information to be visibly displayed on a free-access website of the manufacturer, importer or authorised representative</b>		N
3.(c)(1)	Separate control gears For any separate control gear that is placed on the EU market, the following information shall be displayed on at least one free-access website:		N
	(a) the information specified in point 3(b)(2), except 3(b)(2)(h)		N
	(b) the outer dimensions in mm		N
	(c) the mass in grams of the control gear, without packaging, and without lighting control parts and non-lighting parts, if any and if they can be physically separated from the control gear		N
	(d) instructions on how to remove lighting control parts and non-lighting parts, if any, or how to switch them off or minimise their power consumption during control-gear testing for market surveillance purposes		N
	(e) if the control gear can be used with dimmable light sources, a list of minimum characteristics that the light sources should have to be fully compatible with the control gear during dimming, and possibly a list of compatible dimmable light sources		N
	(f) recommendations on how to dispose of it at		N

### Appendix-Test Data Sheet

#### 1、Initial Lumen Measurement and Color Performance:

Sample No.	Power Pon (W)	Ponmax (W)	Luminous Flux $\Phi_{total}$ (lm)	Efficacy (lm/W)	Color Temp (CCT)	Color rendering (Ra)	R9	SDCM	x	y
1	1.91	1.90	83.91	167.82	2615	70.1	6	5.0	0.4514	0.4054
2	1.93	1.91	84.68	169.36	2617	70.2	6	5.0	0.4513	0.4055
3	1.95	1.91	82.94	165.88	2616	70.1	6	5.0	0.4515	0.4054
4	1.99	1.94	81.73	163.46	2613	70.3	6	5.1	0.4514	0.4053
5	1.95	1.93	83.43	166.86	2616	70.2	6	5.0	0.4513	0.4054
6	1.97	1.96	82.32	164.64	2614	70.2	6	4.9	0.4514	0.4053
7	1.93	1.91	83.02	166.04	2612	70.1	6	5.1	0.4515	0.4054
8	1.97	1.94	82.82	165.64	2618	70.2	6	5.0	0.4514	0.4055
9	1.96	1.92	84.66	169.32	2615	70.1	6	5.0	0.4513	0.4055
10	1.95	1.93	83.93	167.86	2616	70.3	6	5.0	0.4515	0.4053
Avg.	1.94	1.93	83.34	166.68	2616	70.2	6	5.0	0.4514	0.4054

Remark:2700K

Tables

#### 2、Different Mode Power、Flicker、Stroboscopic Effect and Lumen Maintenance Test:


Sample No.	Disp. Factor	Standby Power P <sub>sb</sub>	Network Sb. Power P <sub>net</sub>	Flicker Pst LM	Stroboscopic Effect SVM	Total Luminous flux (lm) After 3600h	Lumen Maintenance at 3600h (%)	Survival factor at 3600h
1	0	N/A	N/A	0.003	0	N/A	N/A	P
2	0	N/A	N/A	0.002	0	N/A	N/A	P
3	0	N/A	N/A	0.001	0	N/A	N/A	P
4	0	N/A	N/A	0.002	0	N/A	N/A	P
5	0	N/A	N/A	0.003	0	N/A	N/A	P
6	0	N/A	N/A	0.001	0	N/A	N/A	P
7	0	N/A	N/A	0.002	0	N/A	N/A	P
8	0	N/A	N/A	0.001	0	N/A	N/A	P
9	0	N/A	N/A	0.002	0	N/A	N/A	P
10	0	N/A	N/A	0.003	0	N/A	N/A	P
Avg.	0	N/A	N/A	0.002	0	N/A	N/A	P

Remark:2700K

**ATTACHMENT 1(S)**

<b>Energy efficiency classes</b>			
Standard	Clause	Model No.	Verdict
(EU) 2019/2015	Energy class	S14	P
Conditions	-Test conditions: -ambition: 25°C/60%R.H. -Test voltage:AC/DC220V		
$\Phi_{use}$	160 lm (Declared)		
$P_{on}$	$P_{on} = 2W$ (Declared)		
$F_{TM}$	0.926		
$\eta_{TM}$	83 lm/w (Declared)		
Technical requirements	Test result		
$\eta_{TM} = (\Phi_{use}/P_{on}) \times F_{TM} (lm/W).$	Energy efficiency class	Total mains efficacy $\eta_{TM}$ (lm/W)	Verdict
	A	$210 \leq \eta_{TM}$	N
	B	$185 \leq \eta_{TM} < 210$	N
	C	$160 \leq \eta_{TM} < 185$	N
	D	$135 \leq \eta_{TM} < 160$	N
	E	$110 \leq \eta_{TM} < 135$	N
	F	$85 \leq \eta_{TM} < 110$	N
	G	$\eta_{TM} < 85$	P
Factors F <sub>TM</sub> by light source type			
Light source type	Factor F <sub>TM</sub>		Verdict
Non-directional (NDLS) operating on mains (MLS)	1.000		N
Non-directional (NDLS) not operating on mains (NMLS)	0.926		P
Directional (DLS) operating on mains (MLS)	1.176		N
Directional (DLS) not operating on mains (NMLS)	1.089		N

Tables

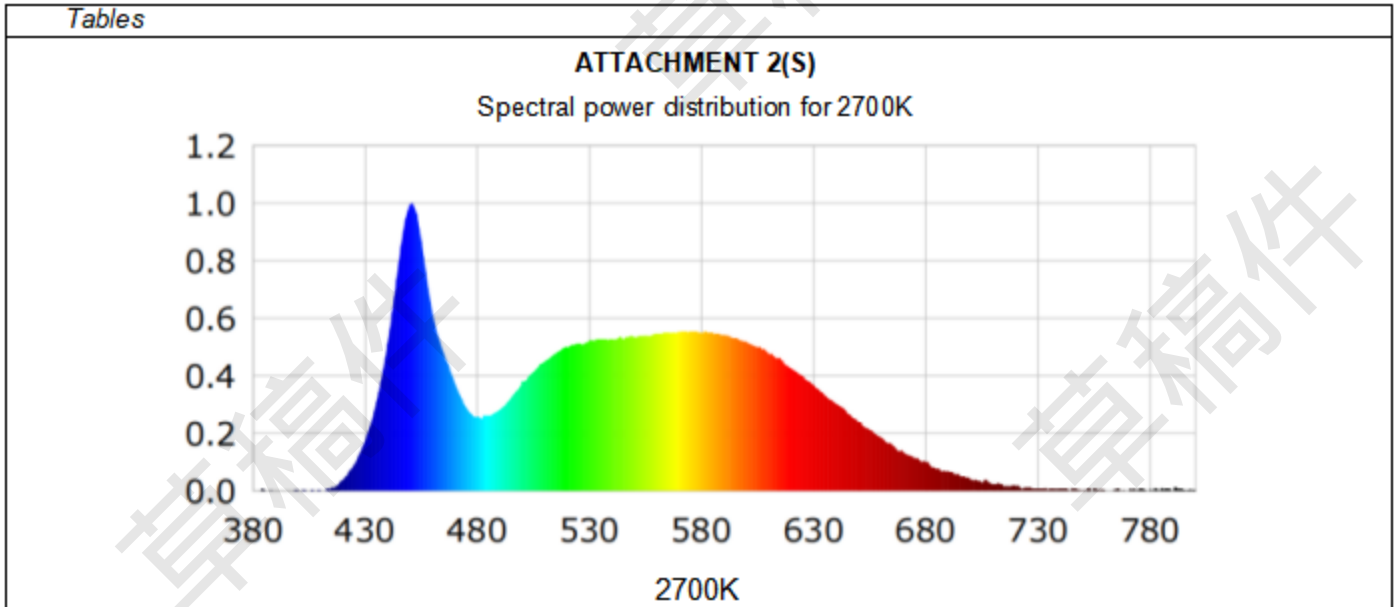

ATTACHMENT 3(S)  
S14

