

How to Clean and Assemble the Grinder?

Regular cleaning helps to achieve consistent grinding results which is especially important for the best extraction. Please follow the steps below to clean and assemble the grinder.

01. Take the bracket out.



02. Press the red release button and turn the grinder clockwise to release it.




03. Once you hear a “click” sound and feel the grinder is unlocked, pull it out in downward direction.



04. Rotate the distributor clockwise to release it from the grinder.



05. Clean the outside of grinder with the cleaning brush.

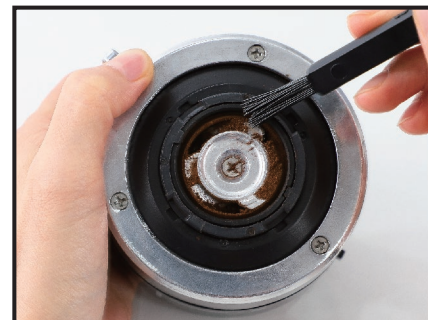


06. Clean the inside of grinder with the cleaning brush.




07. Clean the distributor with the cleaning brush.




08. After cleaning, rotate the distributor anti-clockwise to assemble it to the grinder firstly.

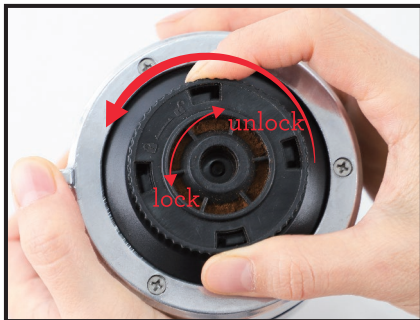

09. **Note:** The fastener of distributor must point at the groove of grinder. Otherwise, the distributor could not be assembled successfully.

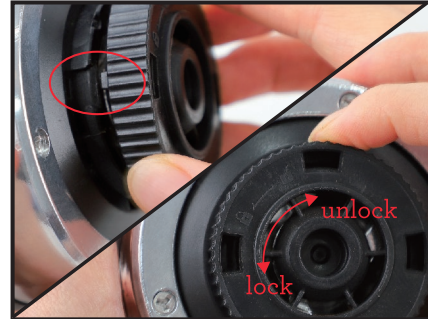

10. If the distributor is installed correctly, a small triangle plate will appear on the top.

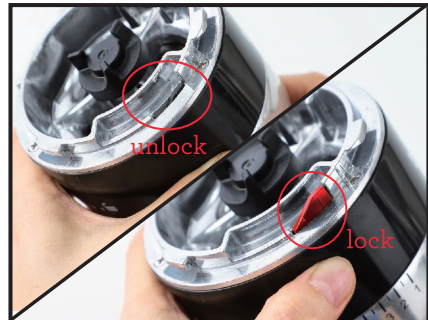

11. Insert the grinder into the espresso machine as shown.



12. Then hold the grinder and turn it anti-clockwise to lock it. Once the grinder is assembled in place, you can hear a “click” sound and feel it tight in place.



14. Install the bracket in place.



13. **Note:** If the grinder isn't assembled in place, please check whether the baffle inside of coffee machine is locked correctly as the picture shown.

