




新感觉灯光
创造灯光新感觉

Create a new sense of lighting

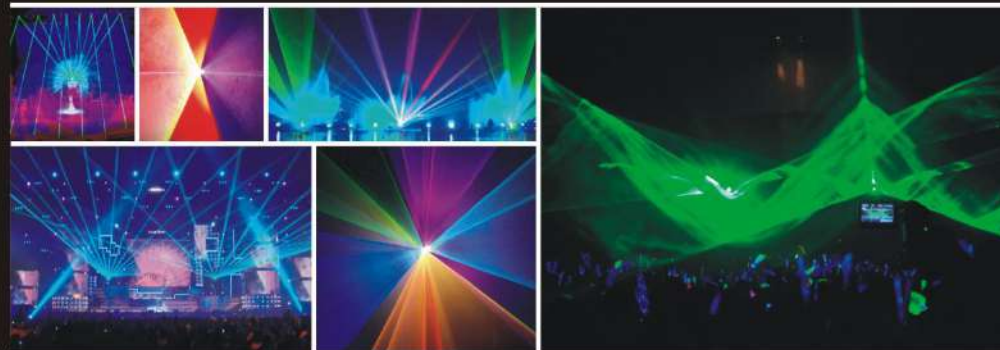

2011~2012 Catalogue

激光系列
LED系列

Laser series
LED series

新感觉实业发展有限公司

NEW FEEL INDUSTRIAL DEVELOPMENT LIMITED

广州新感觉灯光音响设备有限公司

GUANGZHOU NEW FEEL LIGHTING AND AUDIO EQUIPMENTS CO.,LTD.

地址：广州白云区石井镇榕荫路35号裕溪工业园B栋2楼

Add: 2/F, Rongxi Industry Zone, No.35, Rongyin Road, Shijing Town,

Baiyun District, Guangzhou, China.

Tel: +86 20-36393166 36396409


Http://www.newfeellight.com

E-mail: info@newfeellight.com



新感觉灯光
创造灯光新感觉

Create a new sense of lighting

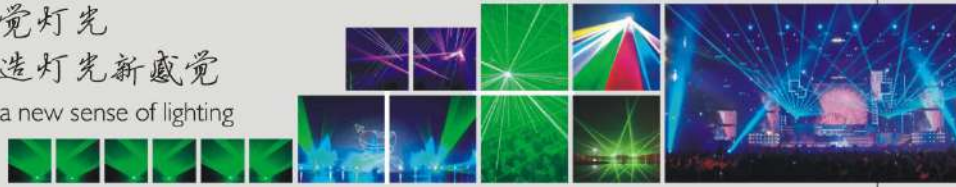

广州新感觉灯光音响设备有限公司是一家集科研、生产、销售、工程服务为一体的科技型专业灯光民营企业。本司聚集了一大批光电技术研发精英和经验丰富、技术精湛的专业生产施工人员，精雕细琢后推出了品种繁多、质量上乘的智能化灯光产品，目前主要产品包括激光灯系列（包括30mw-50W的全彩、七彩、三色、双色、单色等全系列激光灯）和LED灯系列（包括PAR灯，洗墙灯和各种效果LED灯）。

卓越的品质和优良的服务为我们赢得了广阔的市场空间，也使我们的产品倍受国内外用户的青睐；目前我们已经和欧亚、南北美洲等多个国家和地区建立了代理、经销等多种形式的合作关系，而在国内各地的舞台灯光工程、市政工程、地标建筑、主题公园、舞厅、俱乐部、电视台、歌剧院及大型演出等场所，我们的产品也得到了广泛的应用。

以精品缔造行业传奇，以品质树立诚信品牌，以服务感动所有客户，新感觉愿与您携手并进，共同打造灯光世界的绚丽辉煌！

GuangZhou New Feel Lighting And Audio Equipments CO.LTD, is a research and development, production and sale of lighting products professional factory. we gathered a group of photovoltaic science and technology elite and experience R&D, specializing in the production of skilled construction personnel, great care after the introduction of a wide variety of products, quality of intelligent lighting products, at present ,laser light is divided into the full range (including full-color 30mw-50mw, 7 colors, three colors, two colors, single color etc..) also a full range of LED lights (including PAR light, wash wall light and the effect of lights).

Superior quality and excellent service has won a broad market space, making our products both at home and abroad have been highly consistent users, currently we have Euro & Asia, North & South America and other international countries have established agents, distributors etc...forms of cooperation between species, and in various of stage light engineering, municipal works, landmark building, theme park, dance halls, club, TV stations, opera houses, big show and other entertainment, our products have been widely used .

To become a legacy in the industry, to establish the integrity of the brand with product quality , to inspire customers with our impeccable service, the "new feel "will look forward to working with you hand in hand ,together to become the light of the world .



新品推荐
New products



(P01)

RGB/ Single Color Moving head animation laser
全彩/单色动画摇头
FY-7005



(P02)

Moving head animation grating laser
摇头流花台
FY-2021



(P03/P06)

RGB/ Single Color Animation laser
全彩/单绿动画激光灯
NF-828/NF-660



(P09)

Cat eye
节日猫
F1001



(P09)

RG/RB Star Cluster
红绿/红蓝 花满园
F1102



(P10)

RGB Twin Effects
RGB流花台
F1003-250



(P15)

Green Animation Motor Laser
单绿电机动画激光灯
F0970-83



FY-7005/FY-7010/FY-7020

RGB Moving head animation laser
摇头全彩动画激光

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 150W max
Laser Power: RGB 500mw/1000mw/1800mw
Laser Color: RGB seven colors
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control,
automatic, master & slave,
SD Card control (optional)
Control Channel: 15 or 21
Flight case Size: 560×440×840mm
Total weight: <43KG
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: < 150W
激光功率: RGB 500mw/1000mw/1800mw
激光颜色: 全彩
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、
主从、SD卡控制 (可选)
控制通道: 15个或21个
航空箱尺寸: 560×440×840mm
总重: < 43KG
工作环境: 室内(10~35°)

FY-1605/FY-1610/FY-1320

Single Color Moving head animation laser
摇头单色动画激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 100W max
Laser Power: G 500mw/1000mw, B 2000mw
Laser Color: Green (532nm), Blue(450nm)
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control,
automatic, master & slave,
SD Card control (optional)
Control Channel: 13 or 19
Flight case Size: 560×440×840mm
Total weight: <41.5KG
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: < 100W
激光功率: 绿 500mw/1000mw 蓝2000mw
激光颜色: 绿色(532nm)或蓝色(450nm)
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、
主从、SD卡控制 (可选)
控制通道: 13个或19个
航空箱尺寸: 560×440×840mm
总重: < 41.5KG
工作环境: 室内(10~35°)



FY-1601/FY-1602/FY-1603/FY-1303/FY-1305/FY-1310

Single Color Moving head animation laser
摇头单色动画激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: G 100mw/200mw/300mw,
B 300mw/500mw/1000mw
Laser Color: Green (532nm), Blue(450nm)
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control,
automatic, master & slave
Control Channel: 13
Packing Size: 340×350×410 mm
Total weight: 8KG max
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: < 60W
激光功率: 绿100mw/200mw/300mw
蓝300mw/500mw/1000mw
激光颜色: 绿色(532nm)蓝色(450nm)
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: DMX-512, 声控、自走、主从
控制通道: 13个DMX-512信号通道
包装尺寸: 340×350×410 mm
毛重: <8KG
工作环境: 室内(10~35°)

FY-2021/FY-2040/FY2025

Moving head animation grating laser
摇头流花台

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: RG210mw/RB400mw/GB250mw
Laser Color: Green & Red, Red & Blue, Green & Blue
Scan System: 15kpps vibratory mirror system
Divergence Angle: 120 degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control,
automatic, master & slave
Control Channel: 15
Packing Size: 340×350×410 mm
Total weight: 7.5KG max
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: < 60W
激光功率: RG210mw/RB400mw/GB250mw
激光颜色: 红绿、红蓝、绿蓝
扫描系统: 15kpps振镜扫描,
发散角度: 120度
激光图案: 128幅激光效果图案
控制方式: DMX-512, 声控、自走、主从
控制通道: 15个DMX-512信号通道
包装尺寸: 340×350×410 mm
毛重: <7.5KG
工作环境: 室内(10~35°)



F5000-9015/F5000-9010/F5000-9006

RGB Animation laser 5W~15W 全彩动画激光灯5W~15W

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 350W max
Laser Power: RGB 5W~15W
Wavelength: Green:532nm/Red:635nm/
Blue: 450nm or 457nm
Laser Modulation: analog modulation
Laser Color: RGB full colors
Scan System: high speed scanners≥30/40kpps,
Scan Angle: ±30degrees
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 350W
激光功率: 5W~15W
激光波长: 绿光: 532nm, 红光: 635nm,
蓝光: 450nm或457nm
调制信号: 模拟调制
激光颜色: 全彩色
扫描系统: ≥30/40kpps高速扫描系统,
扫描角度: ±30度
控制方式: ILDA, DMX-512, 声控, 自走,
主从, SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)



F1000-9001//F1000-9002/F1000-9003

RGB Animation laser 1W~3W 全彩动画激光灯1W~3W

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 200W max
Laser Power: RGB 1W~4W
Wavelength: Green 532nm, Red 655nm/635nm,
Blue450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB full colors
Scan System: high speed scanners≥30/40kpps,
Scan Angle: ±30degrees
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 660×380×250mm,
Gross Weight: 18KG max
Flight case Size: 690×380×270mm,
Gross Weight: 30KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 200W
激光功率: 1W~4W
激光波长: 绿光: 532nm, 红光: 655nm或
635nm, 蓝光: 450nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: ≥30/40kpps高速扫描系统,
扫描角度: ±30度
控制方式: ILDA, DMX-512, 声控, 自走,
主从, SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
纸箱包装尺寸: 660×380×250,
毛重: < 18KG
航空箱包装尺寸: 690×380×270,
毛重: < 30KG



F4-RGB808/F4-RGB810/F4-RGB818/ F4-RGB830

RGB Animation laser 800mw~3W 全彩动画激光灯800mw~3W

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 100W max
Laser Power: RGB 600mw/1W/1.8W/3W
Wavelength: Green 532nm, Red 655nm/638nm,
Blue450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB seven colors
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave, SD Card control (optional)
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 530×390×280mm
Gross Weight: 18KG max
Flight case Size: 570×440×300mm
Gross Weight: 30KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 100W
激光功率: 600mw/1W/1.8W/3W
激光波长: 绿光: 532nm, 红光: 655nm或
638nm, 蓝光: 450nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控, 自走,
主从, SD卡控制(可选)
控制通道: 12或22
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
纸箱包装尺寸: 530×390×280mm
毛重: < 18KG
航空箱包装尺寸: 570×440×300mm
毛重: < 30KG



NF-815/NFF-820/NF-828

RGB Animation laser 500mw~1.8W 全彩动画激光灯500mw~1.8W

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 100W max
Laser Power: RGB 500mw/800mw/1W/1.8W
Wavelength: Green 532nm, Red 655nm/638nm,
Blue450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB seven colors
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave, SD Card control (optional)
Cool System: fan
Operating Environment: 10~35°indoor
Flightcase Size: 420×340×290mm
Gross Weight: 13KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 100W
激光功率: 500mw/800mw/1W/1.8W
激光波长: 绿光: 532nm, 红光: 655nm或
638nm, 蓝光: 450nm或457nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控, 自走,
主从, SD卡控制(可选)
控制通道: 12或22
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
航空箱包装尺寸: 420×340×290mm
毛重: < 13KG



F500-705/F500-710/F500-718

RGB Animation laser 500mw~1.8W 全彩动画激光灯500mw~1.8W

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 100W max
Laser Power: RGB 500mw/800mw/1W/1.8W
Wavelength: Green 532nm, Red 655nm/638nm,
Blue450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB seven colors
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave, SD Card control (optional)
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 420×335×215mm
Gross Weight: 8KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 100W
激光功率: 500mw/800mw/1W/1.8W
激光波长: 绿光: 532nm, 红光: 655nm或
638nm, 蓝光: 450nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控, 自走,
主从, SD卡控制(可选)
控制通道: 12或22
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
纸箱包装尺寸: 420×335×215mm
毛重: < 8KG



F1003-750/F1003-723

RGB Animation laser 230mw~500mw 全彩动画激光灯230mw~500mw

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 60W max
Laser Power: RGB 500mw/230mw
Wavelength: Green 532nm, Red 650nm,
Blue: 450nm or 405nm
Laser Color: RGB seven colors
Scan System: 20kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic,
master & slave
Cool System: fan
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm,
Gross Weight: 3KG max
Packing Size: 410×370×320mm (5 pcs),
Total weight: 17KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 60W
激光功率: 500mw/230mw
激光波长: 绿光: 532nm, 红光: 650nm,
蓝光: 450nm或405nm
激光颜色: 全彩色
扫描系统: 20kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控, 自走, 主从
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
内包尺寸: 345×290×165mm
毛重: < 3KG
外包装尺寸: 410×370×320mm (5支/箱),
总重量: < 17KG



F3-503/F3-506/F3-513

Three Color Animation Laser 500mw~1300mw
三色动画激光500mw~1300mw



Technical Parameters:

Power Supply: AC90~240V, 50Hz~60HZ
Power Consumption: 80W max
Laser Power: RGY 500mw/800mw/1300mw
Wavelength: Green:532nm, Red:655nm or 638nm
Laser Modulation: TTL
Laser Color: RGY three color
Scan System: 20kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave, ILDA(optional)
Control Channel: 12 or 22
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 420×335×215mm,
Gross Weight: 12~20KG

技术参数:

电源供应: AC90~240V, 50Hz~60HZ
额定功率: < 80W
激光功率: 500mw/800mw/1300mw
激光波长: 绿光: 532nm, 红光: 655nm/638nm
激光调制信号: TTL
激光颜色: 红、绿、黄三色
扫描系统: 20kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: DMX-512、声控、自走、主从、ILDA(可选)
控制通道: 12或22个
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
包装尺寸: 420×335×215mm,
毛重: 12~20KG

F3-520

Three Color Animation Laser 200mw
三色动画激光200mw



Technical Parameters:

Power Supply: AC90~240V, 50Hz~60HZ
Power Consumption: 30W max
Laser Power: RGY 200mw
Wavelength: green:532nm, red: 650nm,
Laser Modulation: 0~20K TTL modulation
Laser Color: RGY three color
Scan System: 15kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave, ILDA(optional)
Control Channel: 12
Cool System: fan
Operating Environment: 10~35°indoor
Inner Packing Size: 270×230×165mm
Gross Weight: 2.6KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 14.5KG

技术参数:

电源供应: AC90~240V, 50Hz~60HZ
额定功率: < 30W
激光功率: RGY 200mw
激光波长: 绿光: 532nm, 红光: 650nm
激光调制信号: TTL调制0~20K
激光颜色: 红、绿、黄三色
扫描系统: 15kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: DMX-512、声控、自走、主从、ILDA(可选)
控制通道: 12
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
内包尺寸: 270×230×165mm,
毛重: 2.6KG
外包尺寸: 905×300×260mm(5支/箱)
总重量: 14.5KG

F5000-682/F5000-683/F5000-685/F5000-690/F5000-698

Green Animation Laser 2W~20W 单绿激光灯2W~20W



Technical Parameters:


Power Supply: AC90~240V, 50Hz~60HZ
Power Consumption: 400W max
Laser Power: 2W~20W
Laser Source: solid semiconductor laser generator
Wavelength: Green:532nm
Laser Modulation: analogue modulation or 0~20K TTL modulation
Laser Color: Green
Scan System: high speed scanner ±30/40kpps,
Scan Angle: ±30degrees
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC90~240V, 50Hz~60HZ
额定功率: < 400W
激光功率: 2W~20W
激光光源: 半导体激光发生器
激光波长: 绿光: 532nm
激光调制信号: 模拟调制或TTL调制0~20K
扫描系统: ≥30/40kpps高速振镜扫描系统,
扫描角度: ±30度
控制方式: ILDA, DMX-512、声控、自走、主从、SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)

F2000-675/F2000-681

Green Animation Laser 500mw~1W 单绿动画激光500mw~1W



Technical Parameters:

Power Supply: AC90~240V, 50Hz~60HZ
Power Consumption: 80W max
Laser Power: 500mw/1W
Wavelength: 532nm
Laser Modulation: 0~20K TTL modulation
Laser Color: Green
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Control Channel: 10 or 22
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 520×390×266mm
Gross Weight: < 11KG

技术参数:

电源供应: AC90~240V, 50Hz~60HZ
额定功率: < 80W
激光功率: 500mw/1W
激光波长: 绿光: 532nm
激光调制信号: TTL调制0~20K
激光颜色: 翠绿色
扫描系统: 25kpps振镜扫描,
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512、声控、自走、主从、SD卡控制(可选)
控制通道: 10或22个
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
包装尺寸: 520×390×266mm
毛重: < 11KG

NF-653/NF-655/NF-660

Green Animation Laser 300mw~1W 单绿动画激光300mw~1W



Technical Parameters:

Power Supply: AC90~240V, 50Hz~60HZ
Power Consumption: 80W max
Laser Power: 300mw/500mw/1W
Laser Color: Green(532nm)
Scan System: 25kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Control Channel: 10 or 22
Operating Environment: 10~35°indoor
Flight case Size: 420×340×290mm
Gross Weight: 13KG max

技术参数:

电源供应: AC90~240V, 50Hz~60HZ
额定功率: < 80W
激光功率: 300mw/500mw/1W
激光颜色: 翠绿色(532nm)
扫描系统: 25kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512、声控、自走、主从、SD卡控制(可选)
控制通道: 10或22个
工作环境: 室内(10~35°)
航空箱尺寸: 420×340×290mm
毛重: < 13KG



F500-662/F500-663/F500-665

Green Animation Laser 200~500mw 单绿动画激光200mw~500mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: 200mw/300mw/500mw
Laser Color: Green(532nm)
Scan System: 20kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Control Channel: 10 or 22
Operating Environment: 10~35°indoor
Packing Size: 420×335×215mm
Gross Weight: 6KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 60W
激光功率: 200mw/300mw/500mw
激光颜色: 翠绿色(532nm)
扫描系统: 20kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
控制通道: 10 或 22个
工作环境: 室内(10~35°)
包装尺寸: 420×335×215mm
毛重: < 6 KG



F1101-650/F1101-651/F1103-652/F1101-653

Green Animation Laser 100~300mw 单绿动画激光100mw~300mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: 100mw/150mw/200mw/300mw
Laser Color: Green(532nm)
Scan System: 20kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave
Control Channel: 10 or 22
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross Weight: 2.6~3.2KG
Packing Size: 910×370×320mm(5 pcs)
Total weight: 15~18KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 60W
激光功率: 100mw/150mw/200mw/300mw
激光颜色: 翠绿色(532nm)
扫描系统: 20kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从
控制通道: 10 或 22个
工作环境: 室内(10~35°)
内包尺寸: 345×290×165
毛重: 2.6~3.2KG
外包装尺寸: 910×370×320mm (5支/箱)
总重量: 15~18KG



F1002-606/F1002-610/F1002-615

Green Animation Laser 60mw~150mw 单绿动画激光60mw~150mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: 60mw/100mw/150mw
Laser Color: Green(532nm)
Scan System: 15kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave, ILDA(optional)
Control Channel: 10
Operating Environment: 10~35°indoor
Inner Packing Size: 270×230×165mm
Gross Weight: 2~2.4KG
Packing Size: 905×300×260mm(5 pcs)
Total weight: 12~14KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 50W
激光功率: 60mw/100mw/150mw
激光颜色: 翠绿色(532nm)
扫描系统: 15kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: DMX-512, 声控、自走、主从、ILDA(可选)
控制通道: 10个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 270×230×165
毛重: 2~2.4KG
外包装尺寸: 905×300×260mm(5支/箱)
总重量: 12~14KG



F1101-305/F1101-310

Blue Animation Laser 500~1000mw
单蓝动画激光500~1000mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: 500mw/1000mw
Laser Color: Blue(450nm)
Scan System: 20kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave
Control Channel: 10 or 22
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross Weight: 3~3.5KG
Packing Size: 910×370×320mm(5pcs)
Total weight: 17~19.5KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 60W
激光功率: 500mw/1000mw
激光颜色: 蓝色(450nm)
扫描系统: 20kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从
控制通道: 10 或 22个
工作环境: 室内(10~35°)
内包尺寸: 345×290×165
毛重: 3~3.5KG
外包装尺寸: 910×370×320mm (5支/箱)
总重量: 17~19.5KG



F1002-302/ F1002-303/ F1002-305

Blue Animation Laser 200~500mw
单蓝动画激光200~500mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: 200mw/300mw/500mw
Laser Color: Blue(450nm)
Scan System: 15kpps vibratory mirror system,
Scan Angle: ±20degrees
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave, ILDA(optional)
Control Channel: 10
Operating Environment: 10~35°indoor
Inner Packing Size: 270×230×165mm
Gross Weight: 2~2.5KG
Packing Size: 905×300×260mm(5pcs)
Total weight: 12~14.5KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 50W
激光功率: 200mw/300mw/500mw
激光颜色: 蓝色(450nm)
扫描系统: 15kpps振镜扫描
扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: DMX-512, 声控、自走、主从、ILDA(可选)
控制通道: 10个
工作环境: 室内(10~35°)
内包尺寸: 270×230×165mm
毛重: 2~2.5KG
外包装尺寸: 905×300×260mm(5支/箱)
总重量: 12~14.5KG





F1001

Cat eye
节日猫

Technical Parameters:

Power Supply: AC90~240V
Power Consumption: 20W
Laser Power: Green (532nm) 50mw
/ Red (650nm) 100mw
Laser Color: green & red
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Laser Patterns: There are 8 festival patterns,
New Year's Day, Easter, Valentine's Day,
Christmas Day, Wedding and Birthday.
Control Mode: music control, automatic
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V / AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 绿光50mw/532nm
红光100mw/650nm
激光颜色: 红色、翠绿色
扫描系统: 15kpps振镜扫描
激光图案: 内置新年、复活节、情人节、
万圣节、圣诞节、婚礼、
生日等八套节目
控制方式: 声控、自走
工作环境: 室内 (10~35°)

F1102/ F1102B

RG/RB Star Cluster
红绿/红蓝 花满园

Technical Parameters:

Power Supply: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 20W
Laser Power: Green (532nm) 40mw,
Red (650nm) 100mw, B (450nm) 200mw
Laser Color: green & red or green & blue
Control Mode: DMX-512, music control, automatic
Control Channel: 7
Operating Environment: 10~35°indoor
Inner Packing Size: 320×235×121mm
Gross Weight: 3KG
Packing Size: 645×340×255mm (5 pcs)
Total weight: 17 KG

技术参数:

电源供应: AC110V / AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw,
650nm红光100mw, 450nm
蓝200mw
激光颜色: 红绿或红蓝
控制方式: DMX-512、自走、声控
控制通道: 7个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 320×235×121
毛重: 3 KG
外包尺寸: 645×340×255 (5个/箱)
总重量: 17 KG

FY-210/FY-310

RG/RGB Moving Head Motor Animation Laser
红绿/红绿蓝摇头花仙子

Technical Parameters:

Power Supply: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
B (450nm) 200mw
Laser Color: green & red or RGB
Control Mode: DMX-512, music control, automatic
Control Channel: 7
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross Weight: 2.8KG
Packing Size: 910×370×320mm (5 pcs)
Total weight: 16KG

技术参数:

电源供应: AC110V / AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
450nm蓝200mw
激光颜色: 红绿或红绿蓝
控制方式: DMX-512、自走、声控
控制通道: 7个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 345×290×165mm
毛重: 2.8KG
外包尺寸: 910×370×320mm (5支/箱)
总重量: 16KG



F1003-250

RGB Twin Effects RGB 流花台

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 30W
Laser Power: Green (532nm) 60mw
Red (650nm) 150mw
Blue (450nm) 200mw
Laser Color: red & green & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic,
master & slave
Control Channel: 12
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross Weight: 2.8KG
Packing Size: 910×370×320mm (5 pcs)
Total weight: 16KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: 30W
激光功率: 532nm绿光60mw
650nm红光150mw
450nm蓝光200mw
激光颜色: 红色、绿色、蓝色
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案
控制方式: DMX-512、声控、自走、主从
控制通道: 12
工作环境: 室内(10~35°)
内包尺寸: 345×290×165mm
毛重: 2.8KG
外包尺寸: 910×370×320mm (5支/箱)
总重量: 16KG

F1003-220 / F1003-245

RB/RG Twin Effects RB/RG 流花台

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 20W
Laser Power: Green (532nm) 60mw
Red (650nm) 150mw
Blue (450nm) 300mw
Laser Color: red & blue or green & red
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic,
master & slave
Control Channel: 11
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross weight: 2.8KG
Packing Size: 910×370×320mm (5 pcs)
Gross weight: 15KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光60mw
650nm红光150mw
450nm蓝光300mw
激光颜色: 红蓝或红绿
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案
控制方式: DMX-512、声控、自走、主从
控制通道: 11个
工作环境: 室内(10~35°)
内包尺寸: 345×290×165mm
毛重: 2.8KG
外包尺寸: 910×370×320mm (5支/箱)
总重量: 15KG

F1002-210/ F1002-230

RG/RB Twin Effects RG/RB流花台

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 20W
Laser Power: Green (532nm) 50mw
Red (650nm) 100mw
Blue (450nm) 200mw
Laser Color: red & green or red & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic,
master & slave
Control Channel: 11
Operating Environment: 10~35°indoor
Inner Packing Size: 260×290×185mm
Gross weight: 2.1KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 11KG

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光50mw
650nm红光100mw
450nm蓝光200mw
激光颜色: 红绿或红蓝
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案
控制方式: DMX-512、声控、自走、主从
控制通道: 11个
工作环境: 室内(10~35°)
内包尺寸: 260×290×185mm
毛重: 2.1KG
外包尺寸: 905×300×260mm (5支/箱)
总重量: 11KG



F1003-008

Firefly & RG Cross Laser
RGB萤火虫

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Blue (450nm) 200mw
Laser Color: red, green & blue
Control Mode: DMX-512, music control, automatic
Control Channel: 4
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross Weight: 2.6 KG
Packing Size: 910×370×320mm (5 pcs)
Total weight: 16 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 绿光 (532nm) 40mw
红光 (650nm) 100mw
蓝光 (450nm) 200mw
激光颜色: 红色、翠绿色、蓝紫色
控制方式: DMX-512、自走、声控
控制通道: 4个
工作环境: 室内(10~35°)
内包尺寸: 345×290×165
毛重: 2.6KG
外包尺寸: 910×370×320 (5个/箱)
总重量: 16KG



F0926/F0927/F0928


四合一光栅激光灯

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green(532nm)40mw
Red (650nm)100mw
Laser Color: green & red
Control Mode: music control, automatic
Operating Environment: 10~35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2.2 KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: 12 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: 声控、自走
工作环境: 室内(10~35°)
内包尺寸: 270×245×105mm
毛重: 2.2KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: 12KG



NF-01/NF-02/NF-03


Fireworks Twinkling Laser & LED Light
流水烟花

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green or red or green & red
Light Source: 18 pcs 5mm LED
Control Mode: music control, automatic
Operating Environment: 10~35°indoor
Inner Packing Size: 270×240×135mm
Gross Weight: 2.9 KG max
Packing Size: 740×290×265mm(5 pcs)
Total weight: 16.5 KG max

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
LED光源: 18颗高亮度5mm灯珠
控制方式: 自走、声控
工作环境: 室内(10~35°)
内包尺寸: 270×240×135mm
毛重: 2.9KG
外包尺寸: 740×290×265(5个/箱)
总重量: <16.5KG



F098A

RG Flowing Petal
红绿花瓣雨

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: red & green
Control Mode: music control, automatic
Operating Environment: 10~35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2 KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: 11.5 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: 自走、声控
工作环境: 室内(10~35°)
内包尺寸: 270×245×105mm
毛重: 2KG
外包尺寸: 565×295×275mm(5个/箱)
总重量: 11.5KG



F098B

RB Flowing Petal
红蓝花瓣雨

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100mw
Blue (450nm) 200mw
Laser Color: Red & Blue
Control Mode: music control, automatic
Operating Environment: 10~35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2 KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: 11.5 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 650nm红光100mw
450nm蓝光200mw
激光颜色: 红色、蓝色
控制方式: 自走、声控
工作环境: 室内(10~35°)
内包尺寸: 270×245×105mm
毛重: 2KG
外包尺寸: 565×295×275mm(5个/箱)
总重量: 11.5KG



F1103

Star Cluster
花满楼

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green & red
Control Mode: DMX-512, music control, automatic
Control Channel: 6
Operating Environment: 10~35°indoor
Inner Packing Size: 320×230×110mm
Gross Weight: 2.8KG
Packing Size: 655×340×265mm (5 pcs)
Total weight: 15.5KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: DMX-512、自走、声控
控制通道: 6个
工作环境: 室内(10~35°)
内包尺寸: 320×230×110
毛重: 2.8KG
外包尺寸: 655×340×265mm(5个/箱)
总重量: 15.5KG





N106


Water Flower
水中花

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green & red
Control Mode: music control, automatic
Operating Environment: 10-35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 1.85KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: 10.5KG

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: 声控、自走
工作环境: 室内(10-35°)
内包尺寸: 270×245×105mm
毛重: 1.85KG
外包尺寸: 565×295×275mm(5个/箱)
总重量: 10.5KG



F095


Fireworks
萤火烟花

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green & red
Control Mode: music control, automatic
Operating Environment: 10-35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2.2 KG
Packing Size: 565×295×275mm (5 pcs)
Total weight: 12 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: 声控、自走
工作环境: 室内(10-35°)
内包尺寸: 270×245×105mm
毛重: 2.2KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: 12KG



F099


Mini Water Flower
迷你水中花

Technical Parameters:

Power Supply: DC12V
Power Consumption: 10W
Laser Power: Green (532nm) 30mw
Red (650nm) 100mw
Laser Color: red & green
Control Mode: music control, automatic
Operating Environment: 10-35°indoor
Inner Packing Size: 200×150×85mm
Gross Weight: 0.9 KG
Packing Size: 445×170×220mm(10 pcs)
Total weight: 10.3KG

技术参数:

额定电压: DC12V
额定功率: 10W
激光功率: 532nm绿光 30mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: 自走、声控
工作环境: 室内(10-35°)
内包尺寸: 200×150×85mm
毛重: 0.9KG
外包尺寸: 445×170×220mm (10个/箱)
总重量: 10.3KG



F088


Firefly
萤火虫

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green & red
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10-35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2.35 KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: 12.8 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光100mw
激光颜色: 红色、绿色
控制方式: DMX-512、自走、声控
控制通道: 5个
工作环境: 室内(10-35°)
内包尺寸: 270×245×105mm
毛重: 2.35KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: 12.8KG



F088-B

RB Firefly
RB萤火虫

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Blue (450nm) 200mw
Red (650nm) 100mw
Laser Color: red & blue
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10-35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2.35 KG
Packing Size: 565×295×275mm (5 pcs)
Total weight: 12.8 KG

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 450nm蓝光 200mw
650nm红光 100mw
激光颜色: 红色、蓝色
控制方式: DMX-512、自走、声控
控制通道: 5个
工作环境: 室内(10-35°)
内包尺寸: 270×245×105mm
毛重: 2.35KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: 12.8KG



F079


花仙子

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 40mw
Red (650nm) 100mw
Laser Color: green & red
Scan System: Micro-stop motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 4
Operating Environment: 10-35°indoor
Inner Packing Size: 320×230×110mm
Gross Weight: 2.85KG
Packing Size: 655×340×265mm (5 pcs)
Total weight: 15.7KG

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 532nm绿光 40mw
650nm红光 100mw
激光颜色: 红色、绿色
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512、自走、声控
控制通道: 4个
工作环境: 室内(10-35°)
内包尺寸: 320×230×110mm
毛重: 2.85KG
外包尺寸: 655×340×265mm (5个/箱)
总重量: 15.7KG





F0970-83/F0970-86

Green Animation Motor Laser
单绿电机动画激光灯

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 30W max
Laser Power: 30mw/60mw
Laser Color: green (532nm)
Scan System: Micro-step motor scanner,
big angle scanning
Control Mode: music control, automatic
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: <30W
激光功率: 30mw/60mw
激光颜色: 绿色(532nm)
扫描系统: 高精度步进电机扫描系统,
大角度扫描
控制方式: 自走、声控
工作环境: 室内(10~35°)



F0971B-66/F0971B-71

Green Rain Curtain
单绿扫描激光雨

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: 60mw/100mw
Laser Color: green (532nm)
Scan System: Micro-step motor scanner,
big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 8
Operating Environment: 10~35°indoor
Inner Packing Size: 360×290×185mm
Gross Weight: 3KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 17KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: <50W
激光功率: 60mw、100mw
激光颜色: 翠绿色(532nm)
扫描系统: 高精度步进电机扫描系统,
大角度扫描
控制方式: DMX-512、自走、声控
控制通道: 8个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 360×290×185mm
毛重: 3KG
外包尺寸: 905×300×260mm (5个/箱)
总重量: 17KG



F0971B-33/ F0971B-35/F0971B-12

Blue/Red Rain Curtain
蓝色/红色 扫描激光雨

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 60W max
Laser Power: Blue (450nm) 300mw / 500mw,
Red (638nm) 200mw
Laser Color: Blue or Red
Scan System: Micro-step motor scanner,
big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 8
Operating Environment: 10~35°indoor
Inner Packing Size: 360×290×185mm
Gross Weight: 3KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 17KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: <60W
激光功率: 450nm蓝: 300mw/500mw,
638nm红: 200mw
激光颜色: 蓝色或红色
扫描系统: 高精度步进电机扫描系统,
大角度扫描
控制方式: DMX-512、自走、声控
控制通道: 8个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 360×290×185
毛重: 3KG
外包尺寸: 905×300×260mm (5个/箱)
总重量: 17KG



F010-06/F010-10

Green Laser Curtain
单绿激光雨帘

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: 60mw/100mw
Laser Color: green (532nm)
Control Mode: DMX-512
Control Channel: 1
Operating Environment: 10~35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: 2 KG
Packing Size: 565×295×275mm (5 pcs)
Total weight: 11 KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: <50W
激光功率: 60mw、100mw
激光颜色: 绿色(532nm)
控制方式: DMX-512
控制通道: 1个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 270×245×105mm
毛重: 2KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: 11KG



F010-86/F010-83


RG/RB 8 Heads Laser Curtain
红绿/红蓝八孔激光门帘

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: Green(532nm)/50mw,
Blue(300nm/450nm),
Red(650nm)/150mw
Laser Color: Green & Red / Blue & Red
Scan System: Micro-step motor scanner,
Control Mode: DMX-512, music control,
automatic, master & slave
Operating Environment: 10~35°indoor
Inner Packing Size: 720×265×165mm
Gross Weight: 5KG
Packing Size: 740×550×370mm (4 pcs)
Total weight: 20.5KG

技术参数:

电源供应: AC110V /AC230V, 50Hz~60Hz
额定功率: <50W
激光功率: 532nm绿50mw,
450nm蓝300mw,
650nm红150mw
激光颜色: 红绿或者红蓝
扫描系统: 高精度步进电机扫描系统
控制方式: DMX-512, 自走、声控、主从
工作环境: 室内(10~35°)
内包尺寸: 720×265×165mm
毛重: 5KG
外包尺寸: 740×550×370mm (4个/箱)
总重量: 20.5KG



F0971-43/F0971-46/F0971-11/F0971-33


Green/Red/Blue Laser
绿色/红色/蓝色激光灯

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ
Power Consumption: 50W max
Laser Power: Green(532nm)30mw/60mw,
Red(650nm)100mw,
Blue(450nm)300mw
Laser Color: Green or Red or Blue
Scan System: Micro-step motor scanner,
big angle scanning
Control Mode: music control, automatic
Operating Environment: 10~35°indoor
Inner Packing Size: 270×245×105mm
Gross Weight: <2.5KG
Packing Size: 565×295×275mm(5 pcs)
Total weight: <13.5 KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: <50W
激光功率: 532nm绿: 30mw/60mw,
650nm红: 100mw,
450nm蓝: 300mw
激光颜色: 绿色或红色或蓝色
扫描系统: 高精度步进电机扫描系统,
大角度扫描
控制方式: 自走、声控
工作环境: 室内(10~35°)
内包尺寸: 270×245×105mm
毛重: <2.5KG
外包尺寸: 565×295×275mm (5个/箱)
总重量: <13.5KG



F0971-53/F0971-56/F0971-58/F0971-59


Green/Red/Blue Laser 绿色/红色/蓝色激光灯

Technical Parameters:

Power Supply: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 50W max
Laser Power: Green(532nm)30mw/60mw, Red(650nm)100mw, Blue(450nm)300mw
Laser Color: Green or Red or Blue
Scan System: Micro-step motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 6
Operating Environment: 10~35°indoor
Inner Packing Size: 320×230×110mm
Gross Weight: 2.6KG max
Packing Size: 655×340×265mm (5 pcs)
Total weight: 14KG max

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: <50W
激光功率: 532nm绿30mw/60mw, 650nm红100mw, 450nm蓝300mw
激光颜色: 绿色或红色或蓝色
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512, 自走, 声控
控制通道: 6个DMX-512信号通道
工作环境: 室内(10~35°)
内包尺寸: 320×230×110mm
毛重: <2.6KG
外包尺寸: 655×340×265mm (5个/箱)
总重量: <14KG



F0973

RGY Tri Colour Laser 红绿黄三色激光

Technical Parameters:

Power Supply: AC110V / AC230V, 50Hz~60Hz±10%
Power Consumption: 30W
Laser Power: Green (532nm) 40mw, Red (650nm) 150mw
Laser Color: green & red & yellow
Scan System: Micro-step motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10~35°indoor
Inner Packing Size: 320×230×110mm
Gross Weight: 2.9KG
Packing Size: 655×340×265mm (5 pcs)
Total weight: 15.8KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: 30W
激光功率: 绿光 (532nm) 40mw, 红光 (650nm) 150mw
激光颜色: 绿色, 红色, 黄色
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512, 自走, 声控
控制通道: 5个
工作环境: 室内(10~35°)
内包尺寸: 320×230×110mm
毛重: 2.9KG
外包尺寸: 655×340×265mm (5个/箱)
总重量: 15.8KG



F1066B

Five Color Four Head Laser Light 五彩缤纷激光灯

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power Consumption: 50W
Laser Power: Green(532nm)60mw, Red(650nm)150mw×1+100mw×2, Purple(405nm)100mw
Laser Color: green & red & purple & yellow & fuchsine
Scan System: Micro-step motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10~35°indoor
Inner Packing Size: 700×250×180mm
Gross Weight: 5.3KG
Packing Size: 720×530×410mm (4 pcs)
Total weight: 23.5KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: 50W
激光功率: 532nm绿60mw, 405nm紫光100mw, 650nm红光 (150mw×1+100mw×2)
激光颜色: 绿色, 红色, 紫色, 黄, 品红
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512, 自走, 声控
控制通道: 5个
工作环境: 室内(10~35°)
内包尺寸: 700×250×180mm
内包毛重: 5.3KG
外包尺寸: 720×530×410mm(4个/箱)
外包毛重: 23.5KG



F1066

Red & Green Four Head Laser Light 红绿四头激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power Consumption: 30W
Laser Power: Green(532nm)60mw, Red(650nm)100mw*2
Laser Color: green & red
Scan System: Micro-step motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10~35°indoor
Inner Packing Size: 700×250×180mm
Gross Weight: 4.7KG
Packing Size: 720×530×410mm (4 pcs)
Total weight: 20.5KG
(Notes: Four head green laser light and Four head red laser light can be made in this case)

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: 30W
激光功率: 532nm绿60mw, 650nm红100mw×2
激光颜色: 绿色, 红色
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512, 自走, 声控
控制通道: 5个
工作环境: 室内(10~35°)
内包尺寸: 700×250×180mm
内包毛重: 4.7KG
外包尺寸: 720×530×410mm (4个/箱)
外包毛重: 20.5KG
(备注: 此机箱可同时做四头单绿, 四头单红激光灯)



F1022

Red & Green Double Head Laser Light 红绿双头激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power Consumption: 30W
Laser Power: Green(532nm)40mw, Red(650nm)100mw
Laser Color: green & red
Scan System: Micro-step motor scanner, big angle scanning
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10~35°indoor
Inner Packing Size: 390×260×190mm
Gross Weight: 3.3KG
Packing Size: 970×400×270mm (5 pcs)
Total weight: 18.5KG
(Notes: Double green laser light and double red laser light can be made in this case)

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: 30W
激光功率: 532nm绿40mw, 650nm红100mw
激光颜色: 绿色, 红色
扫描系统: 高精度步进电机扫描系统, 大角度扫描
控制方式: DMX-512, 自走, 声控
控制通道: 5个
工作环境: 室内(10~35°)
内包尺寸: 390×260×190mm
内包毛重: 3.3KG
外包尺寸: 970×400×270mm(5个/箱),18.5KG
(备注: 此机箱可同时做双头单绿, 双头单红激光灯)



FS-2601/FS-2603/FS-2605

Green Scanning Laser 绿色扫描激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power Consumption: 150W max
Laser Power: 100mw,300mw,500mw
Laser Color: Green(532nm)
Scan System: 25kpps vibratory mirror system, scan angle: ±20degrees
Laser Patterns: 128pcs
Pan: 180 degree
Tilt: 120 degree
Control Mode: ILDA, DMX-512, music control, automatic, master & slave
Control Channel: 19
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz
额定功率: <150W
激光功率: 100mw/300mw/500mw
激光颜色: 翠绿色(532nm)
扫描系统: 25kpps机械扫描, scan angle: ±20度
激光图案: 128幅激光效果图案
水平扫描: 180度
垂直扫描: 120度
控制方式: ILDA, DMX-512, 声控, 自走, 主从
控制通道: 19个
工作环境: 室内(10~35°)



High power green laser landmark can be installed in the top buildings ,such as tourist attractions and other outdoor place .is a laser application technology, computer image processing technology and speed scanner control of high-tech products .This products used high power green laser ,can deduce dynamic short line ,surface ,rotating and geometric patterns ,also can play text editor.Laser patterns can scan 360-degree , can enjoy its unique laser effects in a far place ,wonderful effects ,robust ,shock, is the city landmark,the famous scenic , can become a shinning landmark in the city and the unique urban landscape,urban lighting project a symbol of high quality .

高功率绿激光地标可安装在城市高层大厦顶端, 旅游景点等户外场所, 是集激光应用技术、计算机图像处理技术和超高速振镜控制技术于一体的高科技产品。该产品使用高功率的绿激光, 可在空中演绎出各种动态的线、面、旋转体等几何图案, 也可演绎编辑的各种图形文字。纯粹绚丽的激光图案可360度全方位扫描, 方圆数公里均能观赏到其独特的激光夜景, 视觉效果强劲、震撼, 具有王者风范, 是都市标志性建筑、著名景区的点睛之“笔”, 能使该建筑物活景区成为城市中耀眼的地标及独特的城市夜景, 是城市化工程中高品位的象征。



HW-910/HW-920

Laser Landmarks 10W-20W 10W~20W风冷地标激光灯

Technical Parameters:

Power Supply: AC100~240V, 50Hz~60Hz
Power Consumption: 1500W max
Laser Power: 10W/20W
Laser Color: Green(532nm)
Scan System: high speed scanner≥30 vibratory mirror system
Single line range:1KM-3KM
Range Scanning:0.5KM-2KM
Pan: 360 degree
Control Software: Pangolin or Phoneix
Cool System: fan

技术参数:

电源供应: AC100~240V, 50Hz~60Hz
额定功率: <1500W
激光功率: 10W/20W
激光颜色: 翠绿色(532nm)
扫描系统: 高速振镜扫描≥30K, 具有完善的过光、过压、过载、过热等监控和保护功能
单线射程距离: 1KM-3KM
扫描距离: 0.5KM-2KM
旋转角度: 水平360度
控制软件: 美国Pangolin(穿山甲), 德国Phoenix(凤凰)
冷却方式: 风冷



Laser man is the laser programming, creative dance, music to combine a new laser performers, along with the rhythm of the music, laser dancer seems to have been given life, form time to time with the shadow moving .The beam of light is the best, gorgeous and surprise, applicable for Disco, Clubs, KTV station, pub, bar where the special dancing effect required .

激光人是融合了激光编程、舞蹈创意、音乐制作三位一体的全新激光舞蹈表演形式, 伴随着动感的音乐节奏, 舞者就像光影界的魔术师, 激光仿佛被赋予了生命的灵性 时而光随影动, 时而人舞交融, 每一束光线都是最好的道具, 或绚烂或惊奇。

激光人表演系统一般由激光器、控制软件及表演程序、激光扫描组件、舞台、激光笔等组成。适用于Disco,演艺吧、夜总会、电视台、歌剧院等要求较高的场所使用。

F5000-820/ F5000-830/F5000-850

Laser Man
绿色激光人

Technical Parameters:

Power Supply: AC100~240V, 50Hz~60Hz
Power Consumption: 200W max
Laser Power: 2W/3W/5W
Laser Color: Green(532nm)
Scan System: high speed scanner≥30 vibratory mirror system
Control Mode: ILDA
Control Software: Pangolin or Phoneix
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC100~240V, 50Hz~60Hz
额定功率: <200W
激光功率: 2W/3W/5W
激光颜色: 翠绿色(532nm)
扫描系统: ≥30Kpps振镜扫描
控制方式: ILDA
控制软件: 美国Pangolin(穿山甲); 德国Phoenix(凤凰)
工作环境: 室内(10~35°)



N-P007/ N-P008

36 pcs LED Waterproof PAR Light
36颗 LED 防水 PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 60W/150W
Light Source: High power 1W or 3W LED ,
36 pcs of leds: 12 Red, 12 Green , 12Blue
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4 or 6 channels
Outer cover material: Aluminum body, black and white

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 60W/150W
光源: 36颗1W/3W高功率LED(红色12颗, 绿色12颗, 蓝色12颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4通道/6通道
机壳材料: 铸铝, 颜色为: 黑色或白色



N-P009/ N-P010

54 pcs LED Waterproof PAR Light
54颗LED防水 PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 80W/200W
Light Source: High power 1W or 3W LED ,
54 pcs of leds: 14 Red, 14 Green , 14Blue, 12White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4~7 channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 80W/200W
光源: 54颗1W/3W高功率LED(红色14颗, 绿色14颗, 蓝色14颗, 白光12颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4~7通道(多通道可选)
机壳材料: 铸铝, 颜色为: 黑色



N-P011/ N-P012

120 pcs LED PAR Light
120颗LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 150W/400W
Light Source: High power 1W or 3W LED ,
120 pcs of leds: 30 Red, 30 Green, 30 Blue, 30White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4/8 channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 150W/400W
光源: 120颗1W/3W高功率LED (红色30颗, 绿色30颗, 蓝色30颗, 白光30颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4/8通道
机壳材料: 铸铝, 颜色为: 黑色



N-P001

LED PAR Light LED PAR灯

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ-60HZ
Power Consumption: 25W
Light Source: 139 pcs Φ10 LEDs
Color: RGB color mixing
Function: Color Changing, Strobe, Speed
Luminance adjustable, etc.
Control mode: DMX-512 signal control, automatic
Channel: 4 channels
Outer cover material: Aluminium, black and white
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz-60Hz
功率: 25W
光源: 139颗高亮度Φ10 LED
颜色: RGB混色
功能: 颜色变化、频闪、速度、亮度调节
控制方式: DMX-512信号控制、自走
控制通道: 4通道
机壳材料: 铝, 有黑色和白色
工作环境: 室内



N-P003 / N-P004

LED PAR Light LED PAR灯

Technical Parameters:

Power Supply: AC90-240V 50HZ-60HZ
Power Consumption: 60W max
Light Source: High power 1W or 3W LED,
36 pcs of leds: 12 Red, 12 Green, 12Blue
Beam angle: 15°, 25°, 45°(optional)
Color: RGB color mixing
Function: Color Changing, Strobe, Speed
Luminance adjustable, etc.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4 or 7 channels
Outer cover material: Aluminium, black and white
Operating Environment: indoor

技术参数:

额定电压: AC90-240V 50Hz-60Hz
功率: <60W
光源: 36颗1W/3W高功率LED (红色12颗,
绿色12颗, 蓝色12颗)
发光角度: 15°, 25°, 45°可选
颜色: RGB混色
功能: 颜色变化、频闪、渐变、
速度、亮度调节
控制方式: DMX-512, 声控、自走、主从
控制通道: 4通道/7通道
机壳材料: 铝, 有黑色和白色
工作环境: 室内



N-P005 / N-P006

LED PAR Light LED PAR灯

Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 60W/150W
Light Source: High power 1W or 3W LED,
36 pcs of leds: 12 Red, 12 Green, 12Blue
Beam angle: 15°, 25°, 45°(optional)
Color: RGB color mixing
Function: Color Changing, Strobe,
Speed / Luminance adjustable, etc.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4 or 7 channels
Outer cover material: Aluminium, black and white
Operating Environment: indoor

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 60W/150W
光源: 36颗1W/3W高功率LED (红色12颗,
绿色12颗, 蓝色12颗)
发光角度: 15°, 25°, 45°可选
颜色: RGB混色
功能: 颜色变化、频闪、渐变、
速度/亮度调节
控制方式: DMX-512, 声控、自走、主从
控制通道: 4通道/7通道
机壳材料: 铸铝
工作环境: 室内



N-P013/ N-P014

54 pcs LED PAR Light 54颗LED PAR灯

Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 80W/200W
Light Source: High power 1W or 3W LED,
54 pcs of leds: 14 Red, 14 Green, 14Blue, 12White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4-7 channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 80W/200W
光源: 54颗1W/3W高功率LED(红色14颗,
绿色14颗, 蓝色14颗, 白光12颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、
自走、主从
控制通道: 4-7通道(多通道可选)
机壳材料: 铸铝, 颜色为: 黑色



N-W001/N-W002

36 pcs Waterproof LED Wash Light
36颗防水LED洗墙灯

Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 60W/150W
Light Source: High power 1W or 3W LED,
36 pcs of leds: 12 Red, 12 Green, 12 Blue
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 3/6 channels
Grade of waterproof: IP65
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 60W/150W
光源: 36颗1W/3W高功率LED(红色12颗,
绿色12颗, 蓝色12颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、
自走、主从
控制通道: 3/6通道
防水等级: IP65
机壳材料: 铸铝, 颜色为: 黑色



N-W003/ N-W004

36 pcs Waterproof LED Wash Light
36颗防水LED洗墙灯

Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 60W/150W
Light Source: High power 1W or 3W LED,
36 pcs of leds: 12 Red, 12 Green, 12 Blue
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 3/6 channels
Grade of waterproof: IP65
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 60W/150W
光源: 36颗1W/3W高功率LED(红色12颗,
绿色12颗, 蓝色12颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、
自走、主从
控制通道: 3/6通道
防水等级: IP65
机壳材料: 铸铝, 颜色为: 黑色



N-W005/ N-W006

108 pcs Waterproof LED Wash Light
108颗防水LED洗墙灯

Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 150W/400W
Light Source: High power 1W or 3W LED,
108 pcs of leds: 36 Red, 36 Green, 36 Blue
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 6/7 channels
Grade of waterproof: IP65
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 150W/400W
光源: 108颗1W/3W高功率LED(红色36颗,
绿色36颗, 蓝色36颗)
发光角度: 15°, 25°, 45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、
自走、主从
控制通道: 6/7通道
防水等级: IP65
机壳材料: 铸铝, 颜色为: 黑色



N-Y001/ N-Y002

108 Pcs LED Moving Head Light 108颗LED摇头灯

Technical Parameters:

Power Supply: AC90-240V, 50Hz-60Hz
Power Consumption: 150W/400W
Light Source: High power 1W or 3W LED,
108 pcs of leds: 36 Red, 36 Green, 36 Blue
Color: 16.7 million for RGB
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 8-16channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90-240V, 50Hz-60Hz
功率: 150W/400W
光源: 108颗1W/3W高功率LED(红色36颗,
绿色36颗, 蓝色36颗)
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、
自走、主从
控制通道: 8-16通道
机壳材料: 铸铝, 颜色为: 黑色



N-X013

LED Butterfly LED蝴蝶灯

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz-60Hz
Power consumption: 15W
Light Source: 1x3W red, 1x3W green, 1x3W blue
Color: Red and Green and Blue
Control mode: DMX-512, music control, automatic
Channel: 6 channels
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz-60Hz
功率: 15W
光源: 1颗3W红, 1颗3W绿, 1颗3W蓝
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走
控制通道: 6通道
工作环境: 室内



N-X014

LED Magic Crystal Ball LED水晶魔球

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz-60Hz
Power consumption: 20W
Light Source: 3W/9W LED diodes
Color: Red and Green and Blue
Control mode: DMX-512, music, automatic
Channel: 6 channels
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz-60Hz
功率: 20W
光源: LED 大功率 3W/9W
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走
控制通道: 6通道
工作环境: 室内



N-X015

LED Octopus LED八爪鱼

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz-60Hz
Power consumption: 50W
Light Source: 120 pcs Φ5 LEDs
120 pcs of leds: 40 Red, 40 Green, 40 Blue
Color: Red and Green and Blue
Control mode: DMX-512, music, automatic
Channel: 11 channels
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz-60Hz
功率: 50W
光源: 120颗Φ5LED (红色40颗, 绿色40颗,
蓝色40颗)
颜色: 红、绿、蓝
控制方式: DMX-512控制、声控、自走
控制通道: 11通道
工作环境: 室内



N-X001

LED Seven Heads Magic Light LED七头魔灯

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz-60Hz
Power consumption: 60W max
Light Source: 468 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: 7 gobo teams dynamic change, Zoom out or
Zoom in for each team is available, gobo speed change
adjustable, gobo with flash function, etc.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 9 or 11 channels
Outer cover material: Iron and Aluminium,
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz-60Hz
功率: <60W
光源: 468颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 7组图案动感变换, 每组图案均可放
大缩小, 图案变换速度可调节, 并设
有频闪功能
控制方式: DMX-512、声控、自走、主从
控制通道: 9通道/11通道
机壳材料: 铁和铝
工作环境: 室内



N-X002


LED Kaleidoscope LED万花筒

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz-60Hz
Power consumption: 60W max
Light Source: 162 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: Multi-Gobos Dynamic change, gobo speed change
adjustable, gobo with flash function, etc.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 6 channels
Outer cover material: Iron and Aluminium
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz-60Hz
功率: <60W
光源: 162颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 图案可放大缩小, 图案变换速度可
调节, 并设有频闪功能
控制方式: DMX-512、声控、自走、主从
控制通道: 6通道
机壳材料: 铁和铝
工作环境: 室内



N-X003

LED Four Head Laser Light LED四头线条灯

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz-60Hz
Power consumption: 20W
Light Source: 256 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: 85 Gobos Dynamic change, simulate the laser
beam effect, the gobos can move by level and vertical,
rotate, enlarge and narrow changeable, flashes frequency
and the brightness is adjustable.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 10 channels
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz-60Hz
功率: 20W
光源: 256颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 85种图案动感变换, 图案可移动翻
转, 放大缩小, 变换速度可调节,
并具有渐隐、频闪、亮度调节等功能
控制方式: DMX-512、声控、自走、主从
控制通道: 10通道
机壳材料: 铁
工作环境: 室内



N-X004

LED Double Head Laser Light LED双头图案灯

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz-60Hz
Power consumption: 15W
Light Source: 128 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: multi-gobos dynamic change, chang color,
flowing water/flashes frequency, etc.
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4 channels
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz-60Hz
功率: 15W
光源: 128颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 光束效果和图案变换, 换色,
流水/频闪效果
控制方式: DMX-512、声控、自走、主从
控制通道: 4通道
机壳材料: 铁
工作环境: 室内





N-X005

LED Monnflower Light LED圆筒月花灯

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 46 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: chang color, flowing water/ashes frequency the pace is adjustable, etc.
Control mode: music control, automatic
Outer cover material: Aluminium
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 46颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 换色、流水/频闪效果, 速度可调
控制方式: 声控、自走
机壳材料: 铝
工作环境: 室内



N-X006

LED Flowing Water Light LED流水灯

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 10W
Light Source: 18 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: chang color, flowing water/ashes frequency, etc.
Control mode: automatic and music control
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 10W
光源: 18颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 换色、流水/频闪效果
控制方式: 自走+声控(声控控制转动)
机壳材料: 铁
工作环境: 室内



N-X007

LED Small Rolls Ball LED小滚球

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 32 pcs Φ10 LEDs
Color: Red and Green and Blue
Function: 360-degree rotation, change multi-beam effect
Control mode: automatic
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 32颗高亮度Φ10 LED
颜色: 红、绿、蓝
功能: 360度旋转, 多光束变化
控制方式: 自走
机壳材料: 铁
工作环境: 室内



N-X008

LED Small Magic ball LED小魔球

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 39 pcs Φ10 LEDs
Color: Red and Green and Blue
Control mode: automatic
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 39颗高亮度Φ10 LED
颜色: 红、绿、蓝
功能: 自转、LED灯珠常亮/可频闪
控制方式: 自走
机壳材料: 铁
工作环境: 室内



N-X009

LED Big Magic ball LED大魔球

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 84 pcs Φ10 LEDs
Color: Red and Green and Blue
Control mode: automatic
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 84颗高亮度Φ10 LED
颜色: 红、绿、蓝
功能: 自转、LED灯珠常亮/可频闪
控制方式: 自走
机壳材料: 铁
工作环境: 室内



N-X010


LED Phoenix Light LED凤凰灯

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 30W
Light Source: 152 pcs Φ5 LEDs
Color: Red and Green and Blue
Function: 6 gobo beams dynamic change, gobo speed change adjustable, gobo with flash function, etc.
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4 channels
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 30W
光源: 152颗高亮度Φ5 LED
颜色: 红、绿、蓝
功能: 6组图案动感变换, 图案变换速度可调节, 并设有频闪功能
控制方式: DMX-512、声控、自走、主从
控制通道: 4通道
机壳材料: 铁
工作环境: 室内



N-X011

LED Fairy Scattering Light LED仙女散花

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 30W
Light Source: 183/252 pcs Φ10 LEDs
Color: Red and Green and Blue
Control mode: DMX-512, music control, automatic, master & slave
Channel: 8 channels
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 30W
光源: 183/252颗高亮度Φ10 LED
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 8通道
机壳材料: 铁
工作环境: 室内



N-X012


LED Magic Crystal Ball LED水晶魔球

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 9W LED diodes
Color: Red and Green and Blue
Control mode: DMX-512, music, automatic, master & slave
Channel: 7 channels
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: LED 大功率 9W
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 7通道
机壳材料: 铁
工作环境: 室内



N-S007

LED RGB Strobe
LED换色频闪

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power consumption: 60W
Light Source: High power 1W LED,
48 pcs of leds: 16 Red, 16 Green, 16 Blue
Function: It is the electrodeless by color mix,
color change, flash pace/luminance adjustable
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 7
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 60W
光源: 48颗1W高功率LED (红色16颗,
绿色16颗, 蓝色16颗)
功能: 混色、换色、频闪、亮度可调
控制模式: DMX-512、自走、声控、主从
控制通道: 7个
外壳材料: 铁
工作环境: 室内



N-S005


LED RGB Strobe
LED换色频闪

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power consumption: 30W
Light Source: 198 pcsΦ10 LEDs
Function: It is the electrodeless by color mix,
color change, flash pace/luminance adjustable
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4 or 6
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 30W
光源: 198颗高亮度Φ10 LED
功能: 混色、换色、频闪、亮度可调
控制模式: DMX-512、自走、声控、主从
控制通道: 4/6个通道
外壳材料: 铁
工作环境: 室内



N-S006

LED RGB Strobe
LED换色频闪

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz
Power consumption: 50W
Light Source: 630 pcsΦ5 LEDs
Function: It is the electrodeless by color mix,
color changes, flash pace/luminance adjustable
Control mode: DMX-512, music control,
automatic, master & slave
Channel: 4
Outer cover material: Iron
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 50W
光源: 630颗高亮度Φ5 LED
功能: 混色、换色、频闪、亮度可调
控制模式: DMX-512、自走、声控、主从
控制通道: 4个
外壳材料: 铁
工作环境: 室内



N-S001

LED Sound Control Colorful Strobe
LED声控丽彩

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz~60Hz
Power consumption: 8W
Light Source: 62 pcsΦ5 LEDs
Color: Red, Green, Blue, White, Yellow
Function: Brightness adjustable model or sound
controlled model
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 8W
光源: 62颗高亮度Φ5 LED
颜色: 红、绿、蓝、白、黄
功能: 调光模式或声控模式
工作环境: 室内



N-S002

LED Sound Control Colorful Strobe
LED声控丽彩

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz~60Hz±10%
Power consumption: 10W
Light Source: 74 pcsΦ10 LEDs
Color: Red, Green, Blue, White
Function: Brightness adjustable model or sound
controlled model
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 10W
光源: 74颗高亮度Φ10 LED
颜色: 红、绿、蓝、白
功能: 调光模式或声控模式
工作环境: 室内



N-S003

Three-color LED Stroboscopic Voice
LED 三色频闪

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz~60Hz
Power consumption: 20W
Light Source: 112 pcsΦ10 LEDs
Color: Red and Green and Blue
Function: change color, flashes frequency the
pace is adjustable, etc
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 112颗高亮度Φ10 LED
颜色: 红、绿、蓝
功能: 换色、频闪效果, 速度可调
工作环境: 室内



N-S004

LED Big Strobe
LED 大频闪

Technical Parameters:

Power Supply: AC110V/AC230V 50Hz~60Hz
Power consumption: 20W
Light Source: 142 pcsΦ10 LEDs
Color: Red, Green, Blue, White
Control mode: automatic, flashes frequency the
pace is adjustable.
Operating Environment: indoor

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: 142颗高亮度Φ10 LED
颜色: 红、绿、蓝、白
模式: 自走, 频闪速度可调
工作环境: 室内

N-C2024

Controller 2024 控台 2024

Technical Parameters:

Power supply: DC9V 10 00mA
DMX512/1990 Standard, 504 channels
Up to 20 scanners may be connected with a maximum of 24 channels
each 24 channels for dimmers
8 slider for manual control of channels
assignable joystick for ease of movement
24 chases (at most 40 steps for each chase)
960 chase steps
Each chase speed and cross time can be saved automatic
128 K high capacity memory card
The Data auto-saves
DMX signal output connector: XLR-D3F
Size: 485mm×250mm×91mm
Net Weight: 5Kg

技术参数:

电源输入: DC9V 10 00mA
DMX512/1990信号输出, 504个控制通道
可同时控制20台24通道电脑灯+24调光通道
8个通道的控制推子
一个可设置的摇杆装置
24个走灯程序, 每个程序最大40步
共960个电脑灯走灯程序步
各程序速度, 渐变值自动记忆
128K 大容量记忆
关机数据保存
DMX信号输出连接器: XLR-D3F
外形尺寸: 485mm×250mm×91mm
重量: 5kg



N-C1216

Controller 1216 控台 1216

Technical Parameters:

Power supply: DC9V 10 00mA
DMX512/1990 Standard, 240 channels
Up to 12 scanners may be connected with a maximum of 16 channels
each 24 channels for dimmers, 24 channels for switch of lamp
8 slider for manual control of channels
assignable joystick for ease of movement
12 chases (at most 40 steps for each chase)
480 chase steps
Each chase speed and cross time can be saved automatic
128 K high capacity memory card
The Data auto-saves
DMX signal output connector: XLR-D3F
Size: 485mm×250mm×91mm
Net Weight: 5Kg

技术参数:

电源输入: DC9V 10 00mA
DMX512/1990信号输出, 240个控制通道
可同时控制12台16通道电脑灯+24调光通道+24开关通道
8个通道的控制推子
一个可设置的摇杆装置
12个走灯程序, 每个程序最大40步
共480个电脑灯走灯程序步
各程序速度, 渐变值自动记忆
128K 大容量记忆
关机数据保存
DMX信号输出连接器: XLR-D3F
外形尺寸: 485mm×250mm×91mm
重量: 5kg



N-C240A

Controller 240A 控台 240A

Technical Parameters:

Power input: DC 9-12V 300ma min
12 scanners of 16 channels each
30 banks have 8 programmable scenes each
6 programmable chase have 240 scenes each
8 slider for manual control of channels
2 assignable wheels for ease of movement
auto mode program controlled by speed and fade time sliders
fade time/assign fade time
reversible DMX channels fixture to react in opposition to others in a chase
8 channel or 16 channel mode
fine adjustment for Wheel pan and tilt
blackout master button
manual override button allow you to grab any fixture on the fly
built in microphone for music triggering
midi control over banks, chases and blackout
power failure memory
Dimensions(mm): 482 x 190 x90
Net Weight: 3.0KG

技术参数:

电源输入: DC9-12V 300mA
最多可控制12台电脑灯, 每台电脑灯最多16个通道
可编30个记忆储存 (Bank), 每个可存储8个场景 (Scene)
6个可编程步序 (Chase), 每个步序可编240步 (即30个Bank Scene)
8个通道控制推子
两个手控轮
在自动运行模式中, FADE可选择全部具有ALL或X/Y, 具有FADE, 都具有SPEED调节。8通道或16通道工作模式
数码轮装置可对灯具的水平/垂直运动进行微调
具Blackout输出
内置麦克风, MID控制
掉电记忆保护
尺寸: 482mm×190mm×90mm
重量: 3.0KG



N-C512A

Controller 512A 控台 512A

Technical Parameters:

Power supply: DC9V 1000mA
DMX512/1990 Standard, 512 channels
Up to 32 scanners may be connected with a maximum of 16 channels each
assignable joystick for ease of movement, four keys fine adjustment
8 chases and 32 scenes can be run at the same time
32 chases (at most 120 steps for each chase)
3840 chase steps
The music trigger source can be selected between audio line input or in-built microphone
The Data auto-saves
DMX signal output connector: XLR-D3F X4
Size: 482mm×300mm×100mm
Net Weight: 6Kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990信号输出
512个控制通道
可同时控制32台16通道电脑灯
16个通道的控制推子
一个可设置的摇杆装置
可同时运行8个走灯程序和32个场景
32个走灯程序, 每个程序最大120步
共3840个电脑灯走灯程序步
走灯音乐同步, 线路电平-10dB--+10dB
自适应/机内话筒
关机数据保存
DMX信号输出连接器: XLR-D3F×4
外形尺寸: 482mm×300mm×100mm
重量: 6.0KG



N-CS512

Controller S512 控台 S512

Technical Parameters:

Power input: DC9V 1000mA
DMX512/1990 standard, 512 DMX control channels.
4 output with optical isolated, withstand 2000Vrms.
Up to 32 scanners may be connected with a maximum of 16 channels each.
A large backlight LCD to display operation parameters.
16 sliders for channel, 1 slider for speed control.
1600 chase steps, 48 chases, up to 100 steps each.
Each step contains its speed and cross time, can be set respectively. Trigger mode selectable: Music synchronously and manual speed.
Cooperating with the chase speed slider, the time of the program step can be changed from 0.03s to 180s.
48 scanner scenes can be used directly.
8 chases, 48 scenes operated at the same time.
At most 32 scanners can be selected
15 environment programs to output the combination, which are composed of different scenes, chases and manual output quickly.
Dimension: 498 x 420 x 115mm
Net Weight: 6.5kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990标准, 512个DMX控制通道。
2路带光隔离的独立输出驱动端口, 具有抗2000VDC电气冲击能力。
可控制32台16通道电脑灯。
带背光的大屏幕LCD显示各种运行参数。
16个通道推杆, 1个速度控制推杆。
1600个走灯程序步存储容量, 48个走灯程序, 每程序最多100步, 每步速度, 渐变参数独立设置, 可选音乐同步或手动速度控制。
在走灯速率推杆的配合下, 程序步的时间范围可从0.03S-180S。
48个可直接调用的电脑灯场景。
可同时运行8个走灯程序, 48个场景, 并可同时对32台电脑灯进行手动运行 (提灯)。
15个环境键, 快速调用不同的场景、走灯、手动运行组合。
尺寸: 498mm×420mm×115mm
重量: 6.5KG



N-C200

Controller 200 控台 200

Technical Parameters:

Power input: DC 9-12V 1000ma min
DMX512/1990 Standard
Total of 192 output channels
30 banks have 8 programmable scenes each
16 slider for manual control of channels
Midi control over banks, chases and Blackout
Record up to 6 programmable chases with fade time and speeds
LED function and program display
Built in microphone for music triggering
Auto mode program controlled by fade time sliders
Dimensions: 520mm×183mm×73mm
Net Weight: 3.0kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990信号输出, 192控制通道
有30个BANKS, 每个BANKS有8个可编程的SCENES
有16个可调位器调节输出大小, 内置MIC头, 提供声音触发, 在自动触发状态下, 通过TAP SYNC键或SPEED电位器确定自动触发时间在MID接口, 可随时用MID信号控制, 4位数码显示屏, BLACK OUT功能可用于手动或MID键控制, CHASES编程和CHASES运动功能, 可用手动或MID键控制输出延时功能, 用FADE TIME电位器调节延时时间
外形尺寸: 520mm×183mm×73mm
重量: 3.0KG



AB-1500



Power: 1500W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 12 minutes
Tank capacity: 2L
Approx. Fog Projection: 12 M
Output: 2000cu.ft/min
Control mode: Circuitry Control, Remote Control
Weight: 7.4KG
Size: 46.5*22.5*19.5(cm)
功率: 1500W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 12分钟
油箱容量: 2L
喷油距离: 12米
喷油量: 2000cu.ft/min
控制模式: 线控、遥控
重量: 7.4KG
尺寸: 46.5*22.5*19.5(cm)

F-3000R



Power: 3000W
Voltage: AC110V,220-250V 50-60Hz
Heat-up Time: 12 minutes
Tank capacity: 10L
Output: 4000cu.ft/min
Control mode: DMXS12,Manual Controller, Remote Control
Weight: 20KG
Size: 72*31*18(cm)
功率: 3000W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 12分钟
油箱容量: 10L
喷油量: 4000cu.ft/min
控制模式: DMXS12, 线控、遥控
重量: 20KG
尺寸: 72*31*18(cm)

S-1200



Power: 1200W
Voltage: AC110V,220-250V 50/60Hz
Tank capacity: 5L
Output: 60 Cubic Meters
Control mode: DMXS12,Circuitry Control, Remote Control
Weight: 11KG
Size: 51.5*31*23(cm)
功率: 1200W
工作电压: AC110V,220-250V 50/60Hz
油箱容量: 5L
喷油量: 60 Cubic Meters
控制模式: DMXS12, 线控、遥控
重量: 11KG
尺寸: 51.5*31*23(cm)

Z-800



Power: 900W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 7 minutes
Tank capacity: 1L
Output: 5000cu.ft/min
Control mode: Circuitry Control
Weight: 4KG
Size: 33*17*14(cm)
功率: 900W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 7分钟
油箱容量: 1L
喷油量: 5000cu.ft/min
控制模式: 线控
重量: 4KG
尺寸: 33*17*14(cm)

AB-1200



Power: 1200W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 8 minutes
Tank capacity: 2L
Approx. Fog Projection: 10 M
Output: 1800cu.ft/min
Control mode: Circuitry Control, Remote Control
Weight: 6.8KG
Size: 49.5*23*14(cm)
功率: 1200W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油箱容量: 2L
喷油距离: 10米
喷油量: 1800cu.ft/min
控制模式: 线控、遥控
重量: 6.8KG
尺寸: 49.5*23*14(cm)

AB-900



Power: 900W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 8 minutes
Tank capacity: 1L
Approx. Fog Projection: 8 M
Output: 5000cu.ft/min
Control mode: Circuitry Control, Remote Control
Weight: 4.6KG
Size: 33.5*19*14(cm)
功率: 900W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油箱容量: 1L
喷油距离: 8米
喷油量: 5000cu.ft/min
控制模式: 线控、遥控
重量: 4.6KG
尺寸: 33.5*19*14(cm)

T-400



Power: 400W
Voltage: AC110V,220-250V 50/60Hz
Heat up Time: 8 minutes
Tank capacity: 0.3L
Output: 2000cu.ft/min
Control mode: Circuitry Control
Weight: 2.5 KG
Size: 23*11*11(cm)
功率: 400W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油箱容量: 0.3L
喷油距离: 8米
喷油量: 2000cu.ft/min
控制模式: 线控
重量: 2.5KG
尺寸: 23*11*11(cm)

B-300



Power: 300W
Voltage: AC110V,220-250V 50/60Hz
Blowing Height: 10 M
Output: 600 cubic meters
Control mode: Remote Control
Weight: 1.4KG
Size: 45*39*41(cm)
功率: 300W
工作电压: AC110V,220-250V 50/60Hz
喷油高度: 10米
喷油量: 600 cubic meters
控制模式: 线控
重量: 1.4KG
尺寸: 45*39*41(cm)

保险绳 / Safety rope



灯架 / Stand



重烟油 Heavy Fog Oil, DJ油 DJ Fog Oil, 烟油 Fog Oil, 德国油 Germany Fog Oil, 雪花油 Snow Oil, 泡泡油 Bubble Oil, 喷火油 Fire Machine Oil

灯钩 / Lighthook



玻璃球 / Glass Ball Light



色片 / Color Filter (1x40m)

航空箱 / Fly Box



光源

Lamp With Different Measurement

