

# 新感覺燈光 創造燈光新感覺

Create a new sense of lighting



广州新感觉灯光音响设备有限公司是一家集科研、生产、销售、工程服务为一体的科技型专业灯光民营企业。本公司聚集了一大批光电科技研发精英和经验丰富、技术精湛的专业生产施工人员，精雕细琢后推出了品种繁多、质量上乘的智能化灯光产品，目前主要产品包括激光灯系列（包括30mw-50W的全彩、七彩、三色、双色、单色等全系列激光灯）LED灯系列（包括PAR灯，洗墙灯和各种效果LED灯）和光束灯系列。

卓越的品质和优良的服务为我们赢得了广阔的市场空间，也使我们的产品倍受国内外用户的青睐；目前我们已经和欧亚、南北美洲等多个国家和地区建立了代理、经销等多种形式的合作关系，而在国内各地的舞台灯光工程、市政工程、地标建筑、主题公园、舞厅、俱乐部、电视台、歌剧院及大型演出等场所，我们的产品也得到了广泛的应用。

以精品缔造行业传奇，以品质树立诚信品牌，以服务感动所有客户，新感觉愿与您携手并进，共同打造灯光世界的绚丽辉煌！

GuangZhou New Feel Lighting And Audio Equipments CO.LTD, is a research and development, production and sale of lighting products professional factory. we gathered a group of photovoltaic science and technology elite and experience R&D, specializing in the production of skilled construction personnel, great care after the introduction of a wide variety of products, quality of intelligent lighting products, at present ,laser light is divided into the full range (including full-color 30mw-50mw, 7 colors, three colors, two colors, single color etc..) also a full range of LED lights (including PAR light, wash wall light and the effect of lights )and Beam Lights.

Superior quality and excellent service has won a broad market space, making our products both at home and abroad have been highly consistent users, currently we have Euro & Asia, North & South America and other international countries have established agents, distributors etc...forms of cooperation between species, and in various of stage light engineering, municipal works, landmark building, theme park, dance halls, club, TV stations, opera houses, big show and other entertainment, our products have been widely used .

To become a legacy in the industry, to establish the integrity of the brand with product quality , to inspire customers with our impeccable service, the "new feel "will look forward to working with you hand in hand ,together to become the light of the world .



## 新品推薦 New products



(P01)

Beam 200 Move Head Light  
200W 光束灯  
N-B200



(P23)

mini LED Butterfly/Super Rocket  
迷你型LED 蝴蝶灯/无极箭  
N-X013A/B



(P22)

36 Pcs (4in1) LED Moving head Light  
36颗四合一 LED摇头灯  
N-Y003



(P18)

24/18/12 Pcs (4in1) LED Waterproof PAR Light  
24/18/12颗LED 防水PAR灯  
N-P015/P016/P017



(P03/P06)

Dustproof RGB/Single Color Animation laser  
防尘全彩/单色动画激光灯  
F1000-/F5000-



(P04/P05)

Dustproof RGB/Single Color Animation laser  
防尘全彩/单色动画激光灯  
NF-815/820/828


N-B200

用心、决心打造放心品质

B200 Beam Light B200光束灯

超亮、光束感超强、移动速度超快、体积超小巧

- 欧司朗 SIRIUS HRI 190W (达8500K色温, 2000小时)
- 3合一透镜式镜头组
- 14个颜色盘+17个图案盘, 8棱镜
- 0%~100%线性调光, 0%~100%线性雾化
- Bulb: OSRAM SIRIUS HRI 190W (8500 K color temperature, 2000 hours)
- Optical Device: three lens group
- Color Wheel: 14 inserted color and white light with two-way rotating and rainbow effect
- Rotating Gobo Wheel: 17 inserted rotation gobos and white circle with design jitter and arbitrary positioning function
- Prism: 8 prisms with positive and negative rotation and prism location function.
- 0% ~ 100% linear dimmer, 0% ~ 100% linear frost

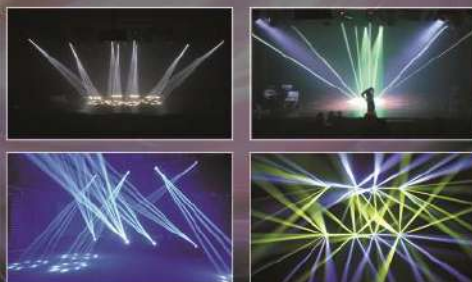

FY-7005/7010/7020/7025/7050

RGB Moving head animation laser  
摇头全彩动画激光

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ  
Power Consumption: 150W max  
Laser Power: RGB 500mw~5000mw  
Laser Color: RGB  
Scan System: 30/40kpps vibratory mirror system,  
Laser Patterns: 128pcs  
Control Mode: ILDA, DMX-512, music control,  
automatic, master & slave,  
SD Card control  
Control Channel: 18 or 23  
Flight case Size: 560×440×840mm  
Total weight: < 45KG  
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50HZ~60HZ  
额定功率: < 150W  
激光功率: RGB 500mw~5000mw  
激光颜色: 全彩  
扫描系统: 30/40kpps振镜扫描,  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控, 自  
走, 主从, SD卡控制  
控制通道: 18个或23个  
航空箱尺寸: 560×440×840mm  
总重: < 45KG  
工作环境: 室内(10~35°)



FY-1605/1610/1620/1650/FY-1320

Single Color Moving head animation laser  
摇头单色动画激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ  
Power Consumption: 100W max  
Laser Power: G 500mw~5000mw, B 2000mw  
Laser Color: Green (532nm), Blue(450nm)  
Scan System: 30/40kpps vibratory mirror system,  
Laser Patterns: 128pcs  
Control Mode: ILDA, DMX-512, music control,  
automatic, master & slave,  
SD Card control  
Control Channel: 16 or 21  
Flight case Size: 560×440×840mm  
Total weight: < 43KG  
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC110V /AC230V, 50HZ~60HZ  
额定功率: < 100W  
激光功率: 绿 500mw~5000mw, 蓝2000mw  
激光颜色: 绿色(532nm)或蓝色(450nm)  
扫描系统: 30/40kpps振镜扫描,  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控, 自走,  
主从, SD卡控制  
控制通道: 16个或21个  
航空箱尺寸: 560×440×840mm  
总重: < 43KG  
工作环境: 室内(10~35°)





F5000-9006/9007/9008/9009/9010/9011/9015

RGB Animation laser 5W~15W 全彩动画激光灯5W~15W

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 350W max  
Laser Power: RGB 5W~15W  
Wavelength: Green:532nm/Red:635nm or 640nm/  
Blue: 450nm or 457nm  
Laser Modulation: analog modulation  
Laser Color: RGB full colors  
Scan System: high speed scanner 40kpps,  
Control Mode: ILDA, DMX-512, music control, automatic,  
master & slave, SD Card control(optional)  
Cool System: fan  
Operating Environment: 10~35°indoor

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 350W  
激光功率: 5W~15W  
激光波长: 绿光: 532nm, 红光: 635nm或  
640nm, 蓝光: 450nm或457nm  
调制信号: 模拟调制  
激光颜色: 全彩色  
扫描系统: 40kpps高速振镜扫描系统,  
控制方式: ILDA, DMX-512, 声控、自走、  
主从、SD卡控制(可选)  
冷却系统: 风机强制冷却系统  
工作环境: 室内(10~35°)



F1000-9001/9002/9003/9004/9005/9006/9007

RGB Animation laser 1W~5W 全彩动画激光灯1W~5W

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 200W max  
Laser Power: RGB 1W~5W  
Wavelength: Green 532nm, Red 655nm/635nm/  
638nm/640nm, Blue450nm  
Laser Modulation: analog modulation or TTL  
Laser Color: RGB  
Scan System: high speed scanner≥30kpps,  
Control Mode: ILDA, DMX-512, music control, autom  
-atic, master & slave, SD Card control  
(optional)  
Cool System: fan  
Operating Environment: 10~35°indoor  
Flight case Size: 560×410×300mm,  
Gross Weight: 30KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 200W  
激光功率: 1W~5W  
激光波长: 绿光: 532nm, 红光: 655nm或  
635nm或638nm或640nm,  
蓝光: 450nm  
激光调制信号: 模拟调制或TTL调制  
激光颜色: 全彩  
扫描系统: ≥30kpps高速振镜扫描系统,  
控制方式: ILDA, DMX-512, 声控、自走、  
主从、SD卡控制(可选)  
冷却系统: 风机强制冷却系统  
工作环境: 室内(10~35°)  
航空箱包装尺寸: 560×410×300,  
毛重: < 30KG



F4-RGB9001/RGB9002/RGB9003/RGB9004/RGB9005/RGB9006

RGB Animation laser 1W~3W 全彩动画激光灯1W~3W

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 100W max  
Laser Power: RGB 1W~3W  
Wavelength: Green 532nm, Red 650nm/635nm or  
638nm, Blue450nm  
Laser Modulation: analog modulation or TTL  
Laser Color: RGB  
Scan System: 20kpps vibratory mirror system,  
Laser Patterns:128pcs  
Control Mode: ILDA, DMX-512, music control, automatic,  
master & slave, SD Card control  
Control Channel:17 or 18  
Cool System: fan  
Operating Environment: 10~35°indoor  
Packing Size: 530×390×280mm  
Gross Weight:16KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 100W  
激光功率: 1W~3W  
激光波长: 绿光: 532nm, 红光: 650nm或  
635nm或638nm, 蓝光: 450nm  
激光调制信号: 模拟调制或TTL调制  
激光颜色: 全彩色  
扫描系统: 20kpps振镜扫描,  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控、自走、  
主从、SD卡控制  
控制通道: 17或18  
冷却系统: 风机强制冷却系统  
工作环境: 室内(10~35°)  
纸箱包装尺寸: 530×390×280mm  
毛重: < 16KG



NF-815/-820/-828

RGB Animation laser 830mw~2.3W 全彩动画激光灯830mw~2.3W

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 100W max  
Laser Power: RGB 830mw~2.3W  
Wavelength: Green 532nm, Red 650nm/638nm,  
Blue450nm  
Laser Modulation: analog modulation or TTL  
Laser Color: RGB  
Scan System: 30kpps vibratory mirror system,  
Control Mode: ILDA, DMX-512, music control, automatic,  
master & slave  
Control Channel: 12  
Cool System: fan  
Operating Environment: 10~35°indoor  
Flightcase Size: 415×335×340mm  
Gross Weight: 15KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 100W  
激光功率: GR830mw~2.3W  
激光波长: 绿光: 532nm, 蓝光: 450nm,  
红光: 650nm或638nm  
激光调制信号: 模拟调制或TTL调制  
激光颜色: 全彩  
扫描系统: 30kpps振镜扫描,  
控制方式: ILDA, DMX-512, 声控、自走、  
主从  
控制通道: 12  
冷却系统: 风机强制冷却系统  
工作环境: 室内(10~35°)  
航空箱包装尺寸: 415×335×340mm  
毛重: < 15KG



F500-705/-710/-718 F600-705/-710/-718

RGB Animation laser 500mw~2.3W 全彩动画激光灯500mw~2.3W

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 100W max  
Laser Power: RGB 500mw~2.3W  
Wavelength: Green 532nm, Red 650nm/638nm,  
Blue450nm  
Laser Modulation: analog modulation or TTL  
Laser Color: RGB  
Scan System: 25kpps vibratory mirror system,  
Laser Patterns:128pcs  
Control Mode: ILDA, DMX-512, music control, automatic,  
master & slave, SD Card control  
Control Channel: 17or 22  
Cool System: fan  
Operating Environment: 10~35°indoor  
Packing Size: 410×310×190mm  
Gross Weight: 8KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 100W  
激光功率: RGB 500mw~2.3W  
激光波长: 绿光: 532nm, 红光: 650nm或  
638nm, 蓝光: 450nm  
激光调制信号: 模拟调制或TTL调制  
激光颜色: 全彩  
扫描系统: 20kpps振镜扫描,  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控、自走、  
主从、SD卡控制  
控制通道: 17或22  
冷却系统: 风机强制冷却系统  
工作环境: 室内(10~35°)  
纸箱包装尺寸: 410×310×190mm  
毛重: < 8KG



F1003-750/F1003-723

RGB Animation laser 230mw~500mw 全彩动画激光灯230mw~500mw

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ  
Power Consumption: 60W max  
Laser Power: RGB 500mw/230mw  
Wavelength: Green 532nm, Red 650nm,  
Blue 450nm or 405nm  
Laser Color: RGB seven colors  
Scan System: 20kpps vibratory mirror system,  
Scan Angle: ±20degrees  
Laser Patterns:128pcs  
Control Mode: ILDA, DMX-512, music control,  
automatic, master & slave  
Control Channel: 22 or 12  
Operating Environment: 10~35°indoor  
Inner Packing Size: 345×250×165mm,  
Gross Weight: 3KG max  
Packing Size: 910×370×320mm (5 pcs),  
Total weight: 17KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 60W  
激光功率: 500mw/230mw  
激光波长: 绿光: 532nm, 红光: 650nm,  
蓝光: 450nm/紫光405nm  
激光颜色: 全彩色  
扫描系统: 20kpps振镜扫描,  
扫描角度: ±20度  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控、  
自走、主从  
控制通道: 22/12个  
工作环境: 室内(10~35°)  
内包尺寸: 345×290×165mm  
毛重: < 3KG  
外包尺寸: 910×370×320mm (5支/箱),  
总重量: < 17KG







### F3-503/F3-506/F3-513/F600-503

Three Color Animation Laser 250mw~1300mw  
三色动画激光250mw~1300mw

#### Technical Parameters:

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 80W max  
**Laser Power:** RGY 250mw~1300mw  
**Wavelength:** Green:532nm, Red:650nm or 638nm  
**Laser Modulation:** TTL  
**Laser Color:** RGY three color  
**Scan System:** 20kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic,  
master & slave, ILDA(optional)  
**Control Channel:** 12 or 22  
**Cool System:** fan  
**Operating Environment:** 10~35°indoor  
**Packing Size:** 420×335×215mm,  
**Gross Weight:** 12~20KG

#### 技术参数:

**电源供应:** AC90~240V, 50HZ~60HZ  
**额定功率:** <80W  
**激光功率:** RGY250mw~1300mw  
**激光波长:** 绿光: 532nm,  
红光: 650nm/638nm  
**激光调制信号:** TTL  
**激光颜色:** 红、绿、黄三色  
**扫描系统:** 20kpps振镜扫描,  
**扫描角度:** ±20度  
**激光图案:** 128幅激光效果图案  
**控制方式:** DMX-512、声控、自走、  
主从、ILDA(可选)  
**控制通道:** 12或22个  
**冷却系统:** 风机强制冷却系统  
**工作环境:** 室内(10~35°)  
**包装尺寸:** 420×335×215mm,  
**毛重:** 12~20KG

### F3-520/F3-501


Three Color Animation Laser 200mw~480mw  
三色动画激光200mw~480mw

#### Technical Parameters:

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 30W max  
**Laser Power:** RGY 200mw~480mw  
**Wavelength:** green:532nm, red: 650nm,  
blue:450nm  
**Laser Color:** RGY or RBM three color  
**Scan System:** 15kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic,  
master & slave, ILDA(optional)  
**Control Channel:** 12  
**Cool System:** fan  
**Operating Environment:** 10~35°indoor  
**Inner Packing Size:** 270×230×165mm  
**Gross Weight:** 2.6KG  
**Packing Size:** 905×300×250mm (5 pcs)  
**Total weight:** 14.5KG

#### 技术参数:

**电源供应:** AC90~240V, 50HZ~60HZ  
**额定功率:** <30W  
**激光功率:** RGY 200mw~480mw  
**激光波长:** 绿光: 532nm,  
红光: 650nm  
蓝光: 450nm  
**激光颜色:** 红、绿、黄或红、蓝、粉/红三色  
**扫描系统:** 15kpps振镜扫描,  
**扫描角度:** ±20度  
**激光图案:** 128幅激光效果图案  
**控制方式:** DMX-512、声控、自走、  
主从、ILDA(可选)  
**控制通道:** 12  
**冷却系统:** 风机强制冷却系统  
**工作环境:** 室内(10~35°)  
**内包尺寸:** 270×230×165mm,  
**毛重:** 2.6KG  
**外包装尺寸:** 905×300×250mm(5支/箱)  
**总重量:** 14.5KG



### F5000-681/682/685/690/695/698/699

Green Animation Laser 1W~30W 单绿激光灯1W~30W

#### Technical Parameters:

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 1000W max  
**Laser Power:** 1W~30W  
**Laser Source:** solid semiconductor laser generator  
**Wavelength:** Green:532nm  
**Laser Modulation:** analogue modulation or 0~20K  
TTL modulation  
**Scan System:** 20KPPS scanning(Large lens)or 40kpps  
high speed scanner  
**Control Mode:** ILDA, DMX-512, music control, automatic,  
master & slave, SD Card control(optional)  
**Cool System:** fan  
**Operating Environment:** 10~35°indoor

#### 技术参数:

**电源供应:** AC90~240V, 50HZ~60HZ  
**额定功率:** <1000W  
**激光功率:** 1W~30W  
**激光光源:** 半导体激光发生器  
**激光波长:** 绿光: 532nm  
**激光调制信号:** 模拟调制或TTL调制0~20K  
**扫描系统:** 20K大镜片振镜片或者40kpps高  
速振镜扫描系统,  
**控制方式:** ILDA, DMX-512、声控、自走、  
主从、SD卡控制(可选)  
**冷却系统:** 风机强制冷却系统  
**工作环境:** 室内(10~35°)

### F2000-675/681/682/683/685

Green Animation Laser 500mw~5W 单绿动画激光500mw~5W

#### Technical Parameters:

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 200W max  
**Laser Power:** 500mw~5W  
**Wavelength:** 532nm  
**Laser Color:** 翠绿色  
**Scan System:** 30kpps vibratory mirror system,  
**Laser Patterns:** 128pcs  
**Control Mode:** ILDA, DMX-512, music control, automatic,  
master & slave, SD Card control  
**Control Channel:** 16 or 17  
**Cool System:** fan  
**Operating Environment:** 10~35°indoor  
**Packing Size:** 530×390×260mm  
**Gross Weight:** <13KG

#### 技术参数:

**电源供应:** AC90~240V, 50HZ~60HZ  
**额定功率:** <200W  
**激光功率:** 500mw~5W  
**激光波长:** 绿光: 532nm  
**激光颜色:** 翠绿色  
**扫描系统:** 30kpps振镜扫描,  
**激光图案:** 128幅激光效果图案  
**控制方式:** ILDA, DMX-512、声控、自走、  
主从、SD卡控制  
**控制通道:** 16或17个  
**冷却系统:** 风机强制冷却系统  
**工作环境:** 室内(10~35°)  
**包装尺寸:** 530×390×260mm  
**毛重:** <13KG

### NF-653/655/660/662/665

Green Animation Laser 300mw~5W 单绿动画激光300mw~5W

#### Technical Parameters:

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 200W max  
**Laser Power:** 300mw~5W  
**Laser Color:** Green(532nm)  
**Scan System:** 30kpps vibratory mirror system,  
**Laser Patterns:** 128pcs  
**Control Mode:** ILDA, DMX-512, music control, automatic,  
master & slave  
**Control Channel:** 10 or 22  
**Operating Environment:** 10~35°indoor  
**Flight case Size:** 415×335×340mm  
**Gross Weight:** 16KG max

#### 技术参数:

**电源供应:** AC90~240V, 50HZ~60HZ  
**额定功率:** <200W  
**激光功率:** 300mw~5W  
**激光颜色:** 翠绿色(532nm)  
**扫描系统:** 30kpps振镜扫描  
**激光图案:** 128幅激光效果图案  
**控制方式:** ILDA, DMX-512、声控、自走、  
主从  
**控制通道:** 10或22个  
**工作环境:** 室内(10~35°)  
**航空箱尺寸:** 415×335×340mm  
**毛重:** <16KG





**F500-662/663/665/670**

Green Animation Laser 200~1000mw 单绿动画激光200mw~1000mw

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 100W max  
**Laser Power:** 200~1000mw  
**Laser Color:** Green(532nm)  
**Scan System:** 20kpps vibratory mirror system,  
**Laser Patterns:** 128pcs  
**Control Mode:** ILDA, DMX-512, music control, automatic, master & slave, SD Card control  
**Control Channel:** 17  
**Operating Environment:** 10~35°indoor  
**Packing Size:** 420×335×215mm  
**Gross Weight:** 6KG max

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 100W  
激光功率: 200~1000mw  
激光颜色: 翠绿色(532nm)  
扫描系统: 20kpps 振镜扫描  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控, 自走, 主从, SD卡控制  
控制通道: 17个  
工作环境: 室内(10~35°)  
包装尺寸: 420×335×215mm  
毛重: < 6 KG



**F1101-650/651/652/653**

Green Animation Laser 100~300mw 单绿动画激光100mw~300mw

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 60W max  
**Laser Power:** 100mw/150mw/200mw/300mw  
**Laser Color:** Green(532nm)  
**Scan System:** 15kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** ILDA, DMX-512, music control, automatic, master & slave  
**Control Channel:** 10 or 22  
**Operating Environment:** 10~35°indoor  
**Inner Packing Size:** 345×290×165mm  
**Gross Weight:** 2.6~3.2KG  
**Packing Size:** 910×370×320mm(5 pcs)  
**Total weight:** 15~18KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 60W  
激光功率: 100mw/150mw/200mw/300mw  
激光颜色: 翠绿色(532nm)  
扫描系统: 15kpps 振镜扫描  
扫描角度: ±20度  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控, 自走, 主从  
控制通道: 10 或 22个  
工作环境: 室内(10~35°)  
内包尺寸: 345×290×165  
毛重: 2.6~3.2KG  
外包装尺寸: 910×370×320mm (5支/箱)  
总重量: 15~18KG



**F1002-606/610/615**

Green Animation Laser 60mw~150mw 单绿动画激光60mw~150mw

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 50W max  
**Laser Power:** 60mw/100mw/150mw  
**Laser Color:** Green(532nm)  
**Scan System:** 15kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic, master & slave, ILDA(optional)  
**Control Channel:** 10  
**Operating Environment:** 10~35°indoor  
**Inner Packing Size:** 270×230×165mm  
**Gross Weight:** 2~2.4KG  
**Packing Size:** 905×300×260mm(5 pcs)  
**Total weight:** 12~14KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 50W  
激光功率: 60mw/100mw/150mw  
激光颜色: 翠绿色(532nm)  
扫描系统: 15kpps 振镜扫描  
扫描角度: ±20度  
激光图案: 128幅激光效果图案  
控制方式: DMX-512, 声控, 自走, 主从, ILDA (可选)  
控制通道: 10个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 270×230×165  
毛重: 2~2.4KG  
外包装尺寸: 905×300×260mm(5支/箱)  
总重量: 12~14KG



**F1101-305/310**

Blue Animation Laser 500~1000mw  
单蓝动画激光500~1000mw

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 60W max  
**Laser Power:** 500mw/1000mw  
**Laser Color:** Blue(450nm)  
**Scan System:** 20kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** ILDA, DMX-512, music control, automatic, master & slave  
**Control Channel:** 10 or 22  
**Operating Environment:** 10~35°indoor  
**Inner Packing Size:** 345×290×165mm  
**Gross Weight:** 2.2~3KG  
**Packing Size:** 910×370×320mm(5pcs)  
**Total weight:** 12~16KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 60W  
激光功率: 500mw/1000mw  
激光颜色: 蓝色(450nm)  
扫描系统: 20kpps 振镜扫描  
扫描角度: ±20度  
激光图案: 128幅激光效果图案  
控制方式: ILDA, DMX-512, 声控, 自走, 主从  
控制通道: 10 或 22个  
工作环境: 室内(10~35°)  
内包尺寸: 345×290×165  
毛重: 2.2~3KG  
外包装尺寸: 910×370×320mm (5支/箱)  
总重量: 12~16KG



**F1002-302/ 303/ 305**

Blue Animation Laser 200~500mw  
单蓝动画激光200~500mw

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 50W max  
**Laser Power:** 200mw/300mw/500mw  
**Laser Color:** Blue(450nm)  
**Scan System:** 15kpps vibratory mirror system,  
**Scan Angle:** ±20degrees  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic, master & slave, ILDA(optional)  
**Control Channel:** 10  
**Operating Environment:** 10~35°indoor  
**Inner Packing Size:** 270×230×165mm  
**Gross Weight:** 2~2.2KG  
**Packing Size:** 905×300×260mm(5pcs)  
**Total weight:** 11~12.5KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: < 50W  
激光功率: 200mw/300mw/500mw  
激光颜色: 蓝色(450nm)  
扫描系统: 15kpps 振镜扫描  
扫描角度: ±20度  
激光图案: 128幅激光效果图案  
控制方式: DMX-512, 声控, 自走, 主从, ILDA(可选)  
控制通道: 10个  
工作环境: 室内(10~35°)  
内包尺寸: 270×230×165mm  
毛重: 2~2.2KG  
外包装尺寸: 905×300×260mm(5支/箱)  
总重量: 11~12.5KG







**F1001**

Cat eye  
节日猫

**Technical Parameters:**

**Power Supply:** AC90~240V  
**Power Consumption:** 20W  
**Laser Power:** Green (532nm) 50mw  
Red (650nm) 100mw  
**Laser Color:** green & red  
**Scan System:** 15kpps vibratory mirror system  
**Laser Patterns:** 128pcs, There are 8 festival patterns, New Year's Day, Easter, Valentine's Day, Christmas Day, Wedding and Birthday.  
**Control Mode:** music control, automatic  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 260x215x100mm  
**Gross Weight:** 1.4KG  
**Packing Size:** 535x270x450mm(10pcs)  
**Gross Weight:** 15KG

**技术参数:**

电源供应: AC90~240V  
额定功率: 20W  
激光功率: 绿光50mw/532nm  
红光100mw/650nm  
激光颜色: 红色、翠绿色  
扫描系统: 15kpps振镜扫描  
激光图案: 128幅图案, 内置新年、元宵节、情人节、万圣节、圣诞节、婚礼、生日以及平日等八套节目  
控制方式: 声控、自走  
工作环境: 室内(10~35°)  
内包尺寸: 260x215x100mm  
毛重: 1.4KG  
外包尺寸: 535x270x450mm (10支/箱)  
总重量: 15KG

**F1102/ F1102B**

RG/RB Star Cluster  
红绿/红蓝 花满园

**Technical Parameters:**

**Power Supply:** AC110V/AC230V, 50Hz~60Hz  
**Power Consumption:** 40W  
**Laser Power:** Green (532nm) 50mw,  
Red(650nm)100mw, B(450nm)300mw  
**Laser Color:** green & red or green & blue  
**Control Mode:** DMX-512, music control, automatic  
**Control Channel:** 7  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 320x235x125mm  
**Gross Weight:** 2.4KG  
**Packing Size:** 655x340x265mm (5 pcs)  
**Total weight:** 13 KG

**技术参数:**

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: 40W  
激光功率: 532nm绿光 50mw,  
650nm红光100mw, 450nm蓝300mw  
激光颜色: 红绿或红蓝  
控制方式: DMX-512、自走、声控  
控制通道: 7个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 320x235x125mm  
毛重: 2.4 KG  
外包尺寸: 655x340x265 (5个/箱)  
总重量: 13 KG

**FY-210/FY-310**

RG/RGB Moving Head Motor Animation Laser  
红绿/红绿蓝摇头花仙子

**Technical Parameters:**

**Power Supply:** AC110V/AC230V, 50Hz~60Hz  
**Power Consumption:** 20W  
**Laser Power:** Green(532nm)40mw  
Red(650nm)100mw  
B(450nm)200mw  
**Laser Color:** green & red or RGB  
**Control Mode:** DMX-512, music control, automatic  
**Control Channel:** 7  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 345x290x165mm  
**Gross Weight:** 2.8KG  
**Packing Size:** 910x370x320mm(5 pcs)  
**Total weight:** 16KG

**技术参数:**

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw  
650nm红光100mw  
450nm蓝200mw  
激光颜色: 红绿或红绿蓝  
控制方式: DMX-512、自走、声控  
控制通道: 7个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 345x290x165mm  
毛重: 2.8KG  
外包尺寸: 910x370x320mm(5支/箱)  
总重量: 16KG



**F1003-250/F1101-250**

RGB Twin Effects RGB 流花台

**Technical Parameters:**

**Power Supply:** AC90~240V, 50Hz~60Hz  
**Power Consumption:** 30W  
**Laser Power:** Green(532nm)60mw  
Red(650nm)150mw  
Blue(450nm)300mw  
**Laser Color:** red & green & blue  
**Scan System:** 15kpps vibratory mirror system  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic, master & slave  
**Control Channel:** 11  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 345x290x165mm  
**Gross Weight:** 2.4KG  
**Packing Size:** 910x370x320mm(5 pcs)  
**Total weight:** 13.5KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: 30W  
激光功率: 532nm绿光60mw  
650nm红光150mw  
450nm蓝光300mw  
激光颜色: 红色、绿色、蓝紫色  
扫描系统: 15kpps振镜扫描  
激光图案: 128幅激光效果图案  
控制方式: DMX-512、声控、自走、主从控制通道: 11  
工作环境: 室内(10~35°)  
内包尺寸: 345x290x165mm  
毛重: 2.4KG  
外包尺寸: 910x370x320mm(5支/箱)  
总重量: 13.5KG

**F1003-220 /245/F1101-220/245**

RB/RG Twin Effects RB/RG 流花台

**Technical Parameters:**

**Power Supply:** AC90~240V, 50Hz~60Hz  
**Power Consumption:** 20W  
**Laser Power:** Green (532nm) 60mw  
Red (650nm) 150mw  
Blue (450nm) 300mw  
**Laser Color:** red&blue or green & red  
**Scan System:** 15kpps vibratory mirror system  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic, master & slave  
**Control Channel:** 11  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 345x290x165mm  
**Gross weight:** 2.2KG  
**Packing Size:** 910x370x320mm(5 pcs)  
**Gross weight:** 12KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光60mw  
650nm红光150mw  
450nm蓝光300mw  
激光颜色: 红蓝或红绿  
扫描系统: 15kpps振镜扫描  
激光图案: 128幅激光效果图案  
控制方式: DMX-512、声控、自走、主从控制通道: 11个  
工作环境: 室内(10~35°)  
内包尺寸: 345x290x165mm  
毛重: 2.2KG  
外包尺寸: 910x370x320mm(5支/箱)  
总重量: 12KG

**F1002-210/ 230**

RG/RB Twin Effects RG/RB流花台

**Technical Parameters:**

**Power Supply:** AC90~240V, 50Hz~60Hz  
**Power Consumption:** 20W  
**Laser Power:** Green (532nm) 50mw  
Red (650nm) 100mw  
Blue(450nm)300mw  
**Laser Color:** red & green or red & blue  
**Scan System:** 15kpps vibratory mirror system  
**Laser Patterns:** 128pcs  
**Control Mode:** DMX-512, music control, automatic, master & slave  
**Control Channel:** 11  
**Operating Environment:** 10~35°indoo  
**Inner Packing Size:** 260x290x185mm  
**Gross weight:** 2.1KG  
**Packing Size:** 905x300x260mm(5 pcs)  
**Total weight:** 11KG

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光50mw  
650nm红光100mw  
450nm蓝光300mw  
激光颜色: 红绿或红蓝  
扫描系统: 15kpps振镜扫描  
激光图案: 128幅激光效果图案  
控制方式: DMX-512、声控、自走、主从控制通道: 11个  
工作环境: 室内(10~35°)  
内包尺寸: 260x290x185mm  
毛重: 2.1KG  
外包尺寸: 905x300x260mm(5支/箱)  
总重量: 11KG



**F1003-008**

Firefly & RG Cross Laser  
RGB萤火虫

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Blue (450nm) 300mw  
Laser Color: red, green & blue  
Control Mode: DMX-512, music control, automatic  
Control Channel: 4  
Operating Environment: 10~35°indoor  
Inner Packing Size: 345×290×165mm  
Gross Weight: 2.8 KG  
Packing Size: 910×370×320mm (5 pcs)  
Total weight: 16 KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 绿光 (532nm) 40mw  
红光 (650nm) 100mw  
蓝光 (450nm) 300mw  
激光颜色: 红色、绿色、蓝色  
控制方式: DMX-512、自走、声控  
控制通道: 4个  
工作环境: 室内(10~35°)  
内包尺寸: 345×290×165  
毛重: 2.8KG  
外包装尺寸: 910×370×320 (5个/箱)  
总重量: 16KG



**F092A/F092B/F092C**

4 in 1 grating laser


**Technical Parameters:**

Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Green(532nm)40mw  
Red (650nm)100mw  
Laser Color: green & red  
Control Mode: music control, automatic  
Operating Environment: 10~35°indoor  
Inner Packing Size: 265×180×100mm  
Gross Weight: 1.25 KG  
Packing Size: 530×280×390mm(10 pcs)  
Total weight: 13 KG

四合一光栅激光灯

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw  
650nm红光100mw  
激光颜色: 红色、绿色  
控制方式: 声控、自走  
工作环境: 室内(10~35°)  
内包尺寸: 265×180×100mm  
毛重: 1.25KG  
外包装尺寸: 530×280×390mm (10个/箱)  
总重量: 13KG



**F095A/F095M/F095C/F095D**

8 in 1/12 in 1/20 in 1 grating laser  
8合1、12合1、20合1光栅激光灯

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Green(532nm)40mw / Red (650nm)  
100mw / Blue(450nm)300mw  
Laser Color: green & red or red & blue  
Control Mode: music control, automatic  
Operating Environment: 10~35°indoor  
Inner Packing Size: 265×180×100mm  
Gross Weight: 1.25 KG  
Packing Size: 530×280×390mm(10 pcs)  
Total weight: 13KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw、650nm红光  
100mw、450nm蓝色300mw  
激光颜色: 红色和绿色或 红色和蓝色  
控制方式: 声控、自走  
工作环境: 室内(10~35°)  
内包尺寸: 265×180×100mm  
毛重: 1.25KG  
外包装尺寸: 530×280×390mm (10个/箱)  
总重量: 13KG



**F098C**

RG Flowing Petal  
红绿花瓣雨

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Laser Color: red & green  
Control Mode: music control, automatic  
Operating Environment: 10~35°indoor  
Inner Packing Size: 265×180×100mm  
Gross Weight: 1.35 KG  
Packing Size: 530×280×390mm(10 pcs)  
Total weight: 14.5 KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw  
650nm红光100mw  
激光颜色: 红色、绿色  
控制方式: 自走、声控  
工作环境: 室内(10~35°)  
内包尺寸: 265×180×100mm  
毛重: 1.35KG  
外包装尺寸: 530×280×390mm(10个/箱)  
总重量: 14.5KG



**F098B**

RB Flowing Petal  
红蓝花瓣雨

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Red (650nm) 100mw  
Blue (450nm) 300mw  
Laser Color: Red & Blue  
Control Mode: music control, automatic  
Operating Environment: 10~35°indoor  
Inner Packing Size: 270×245×105mm  
Gross Weight: 2 KG  
Packing Size: 565×295×275mm(5 pcs)  
Total weight: 11.5 KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 650nm红光100mw  
450nm蓝光300mw  
激光颜色: 红色、蓝色  
控制方式: 自走、声控  
工作环境: 室内(10~35°)  
内包尺寸: 270×245×105mm  
毛重: 2KG  
外包装尺寸: 565×295×275mm(5个/箱)  
总重量: 11.5KG



**F1103**


Star Cluster  
花满楼

**Technical Parameters:**


Power Supply: AC110V /AC230V , 50Hz~60Hz  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Laser Color: green & red  
Control Mode: DMX-512, music control, automatic  
Control Channel: 6  
Operating Environment: 10~35°indoor  
Inner Packing Size: 320×230×110mm  
Gross Weight: 2.8KG  
Packing Size: 655×340×265mm (5 pcs)  
Total weight: 15.5KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw  
650nm红光100mw  
激光颜色: 红色、绿色  
控制方式: DMX-512、自走、声控  
控制通道: 6个  
工作环境: 室内(10~35°)  
内包尺寸: 320×230×110  
毛重: 2.8KG  
外包装尺寸: 655×340×265mm(5个/箱)  
总重量: 15.5KG







**N106**

**Water Flower**

**Technical Parameters:**

Power Supply: AC110V /AC230V, 50HZ~60HZ  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Laser Color: green & red  
Control Mode: music control, automatic  
Inner Packing Size: 270×245×105mm  
Gross Weight: 1.85KG  
Packing Size: 565×295×275mm(5 pcs)  
Total weight: 10.5KG

**水中花**

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw  
650nm红光100mw  
激光颜色: 红色、绿色  
控制方式: 声控、自走  
内包尺寸: 270×245×105mm  
毛重: 1.85KG  
外包装尺寸: 565×295×275mm(5个/箱)  
总重量: 10.5KG



**F088/F088B**


**F088/ F088B RG/RB Firefly 红绿/红蓝萤火虫**

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50HZ~60HZ  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw, Red (650nm) 100mw, Blue(450nm)300mw  
Laser Color: red & green or red & blue  
Control Mode: DMX-512, music control, automatic  
Control Channel : 5  
Inner Packing Size: 270×245×105mm  
Gross Weight: 2.35 KG  
Packing Size: 565×295×275mm(5 pcs)  
Total weight: 12.8 KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm绿光 40mw, 650nm红光 100mw, 450nm蓝光300mw  
激光颜色: 红绿或红蓝  
控制方式: DMX-512、自走、声控  
控制通道: 5个  
内包尺寸: 270×245×105mm  
毛重: 2.35KG  
外包装尺寸: 565×295×275mm (5个/箱)  
总重量: 12.8KG



**F097**

**花仙子**

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50HZ~60HZ  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Laser Color: green & red  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 4  
Inner Packing Size: 320×230×110mm  
Gross Weight: 2.85KG  
Packing Size: 655×340×265mm (5 pcs)  
Total weight: 15.7KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm 绿光 40mw  
650nm 红光 100mw  
激光颜色: 红色、绿色  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 4个  
内包尺寸: 320×230×110mm  
毛重: 2.85KG  
外包装尺寸: 655×340×265mm (5个/箱)  
总重量: 15.7KG


**F099**

**Technical Parameters:**

Power Supply: AC110V /AC230V , 50HZ~60HZ  
Power Consumption: 20W  
Laser Power: Green (532nm) 40mw  
Red (650nm) 100mw  
Laser Color: green & red  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 4  
Inner Packing Size: 320×230×110mm  
Gross Weight: 2.85KG  
Packing Size: 655×340×265mm (5 pcs)  
Total weight: 15.7KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: 20W  
激光功率: 532nm 绿光 40mw  
650nm 红光 100mw  
激光颜色: 红色、绿色  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 4个  
内包尺寸: 320×230×110mm  
毛重: 2.85KG  
外包装尺寸: 655×340×265mm (5个/箱)  
总重量: 15.7KG



**F0970-83/86/33**

**Green /Blue Animation Motor Laser  
单绿/单蓝电机动画激光灯**

**Technical Parameters:**

Power Supply: AC110V /AC230V, 50HZ~60HZ  
Power Consumption: 30W max  
Laser Power: G:30mw/60mw,B:300mw  
Laser Color: green(532nm) ,Blue(450nm)  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: music control, automatic  
Operating Environment: 10~35°indoor  
Inner Packing Size:260×215×100mm  
Gross Weight:1.45KG  
Packing Size:535×270×450mm(10pcs)  
Total weight:15.5KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: <30W  
激光功率: 绿30mw/60mw,蓝300mw  
激光颜色: 绿色(532nm),蓝色(450nm)  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: 自走、声控  
工作环境: 10~35°indoor  
内包尺寸: 260×215×100mm  
毛重: 1.45KG  
外包装尺寸: 535×270×450mm(10支/箱)  
总重量: 15.5KG

**F0971B-66/71**

**Green Rain Curtain  
单绿扫描激光雨**

**Technical Parameters:**

Power Supply: AC110V /AC230V, 50HZ~60HZ  
Power Consumption: 50W max  
Laser Power: 60mw/100mw  
Laser Color: green (532nm)  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 8  
Operating Environment: 10~35°indoor  
Inner Packing Size: 360×290×185mm  
Gross Weight:2.25KG  
Packing Size: 905×300×260mm (5 pcs)  
Total weight: 12.5KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: <50W  
激光功率: 60mw、100mw  
激光颜色: 翠绿色(532nm)  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 8个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 360×290×185mm  
毛重: 2.25KG  
外包装尺寸: 905×300×260mm (5个/箱)  
总重量: 12.5KG



**F0971B-33/ 35/F0971B-12**


**Blue/Red Rain Curtain  
蓝色/红色 扫描激光雨**

**Technical Parameters:**

Power Supply: AC110V /AC230V, 50HZ~60HZ  
Power Consumption: 60W max  
Laser Power: Blue (450nm) 300mw / 500mw, Red (638nm) 200mw  
Laser Color: Blue or Red  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 8  
Operating Environment: 10~35°indoor  
Inner Packing Size: 360×290×185mm  
Gross Weight:2.25KG  
Packing Size: 905×300×260mm (5 pcs)  
Total weight: 12.5KG

**技术参数:**

电源供应: AC110V /AC230V, 50Hz~60Hz  
额定功率: <60W  
激光功率: 450nm蓝: 300mw/500mw, 638nm红: 200mw  
激光颜色: 蓝色或红色  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 8个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 360×290×185mm  
毛重: 2.25KG  
外包装尺寸: 905×300×260mm (5个/箱)  
总重量: 12.5KG





F010-06/03/12

Green /Blue/Red Laser Curtain  
单绿/单蓝/单红激光雨帘

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz  
Power Consumption: 10W max  
Laser Power: G:60mw/B: 300mw/R: 200mw  
Laser Color: green (532nm), Blue(450nm), R (638nm)  
Control Mode: TTL modulation  
Operating Environment: 10~35°indoor  
Inner Packing Size: 150×100×70mm  
Gross Weight: 1.2KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: <10W  
激光功率: 绿60mw, 蓝300, 红200mw  
激光颜色: 绿色(532nm)、蓝(450nm)、红(638nm)  
控制方式: TTL调制  
工作环境: 室内(10~35°)  
内包尺寸: 150×100×70mm  
毛重: 1.2KG



F0971-53/56/58/59

Green/Red/Blue Laser  
绿色/红色/蓝色激光灯

Technical Parameters:

Power Supply: AC110V /AC230V, 50Hz~60Hz  
Power Consumption: 50W max  
Laser Power: Green(532nm)30mw/60mw, Red(650nm)100mw, Blue(450nm)300mw  
Laser Color: Green or Red or Blue  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 6  
Operating Environment: 10~35°indoor  
Inner Packing Size: 320×230×110mm  
Gross Weight: 2.6KG max  
Packing Size: 655×340×265mm (5 pcs)  
Total weight: 14KG max

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: <50W  
激光功率: 532nm绿:30mw/60mw, 650nm红:100mw, 450nm蓝:300mw  
激光颜色: 绿色或红色或蓝色  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 6个DMX-512信号通道  
工作环境: 室内(10~35°)  
内包尺寸: 320×230×110mm  
毛重: <2.6KG  
外包装尺寸: 655×340×265mm (5个/箱)  
总重量: <14KG



F0973

RGY Tri Colour Laser  
红绿黄三色激光

Technical Parameters:

Power Supply: AC110V /AC230V, 50Hz~60Hz±10%  
Power Consumption: 30W  
Laser Power: Green (532nm) 40mw, Red (650nm) 150mw  
Laser Color: green & red & yellow  
Scan System: Micro-step motor scanner, big angle scanning  
Control Mode: DMX-512, music control, automatic  
Control Channel: 5  
Operating Environment: 10~35°indoor  
Inner Packing Size: 320×230×110mm  
Gross Weight: 2.9KG  
Packing Size: 655×340×265mm (5 pcs)  
Total weight: 15.8KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: 30W  
激光功率: 绿光 (532nm) 40mw, 红光 (650nm) 150mw  
激光颜色: 绿色、红色、黄色  
扫描系统: 高精度步进电机扫描系统, 大角度扫描  
控制方式: DMX-512、自走、声控  
控制通道: 5个  
工作环境: 室内(10~35°)  
内包尺寸: 320×230×110mm  
毛重: 2.9KG  
外包装尺寸: 655×340×265mm (5个/箱)  
总重量: 15.8KG



F1066

Red & Green Four Head Laser Light 红绿四头激光

Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz  
Power Consumption: 30W  
Laser Power: Green(532nm)60mw, Red(650nm) 100mw\*2  
Laser Color: green & red  
Scan System: Micro-step motor scanner,  
Control Mode: DMX-512, music control, automatic  
Control Channel: 5  
Operating Environment: 10~35°indoor  
Inner Packing Size: 700×250×180mm  
Gross Weight: 4.7KG  
Packing Size: 720×530×410mm (4 pcs)  
Total weight: 20.5KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz  
额定功率: 30W  
激光功率: 532nm绿60mw, 650nm红100mw\*2  
激光颜色: 绿色、红色  
扫描系统: 高精度步进电机扫描系统,  
控制方式: DMX-512、自走、声控  
控制通道: 5个  
工作环境: 室内(10~35°)  
内包尺寸: 700×250×180mm,  
内包毛重: 4.7KG  
外包装尺寸: 720×530×410mm (4个/箱)  
外包毛重: 20.5KG



F1066B/F1066C

Five Color Four Head Laser Light

Technical Parameters:

Laser Power: Green(532nm)60mw, Red(650nm) 150mw\*1+100mw\*2, Purple(405nm) 100mw, Green(532nm)60mw, Red(650nm) 100mw\*2, Blue(450nm)300mw  
Laser Color: green & red & purple & yellow & fuchsine, green & red & blue & cyan & fuchsine  
Scan System: Micro-step motor scanner,  
Control Mode: DMX-512, music control, automatic  
Control Channel: 5  
Operating Environment: 10~35°indoor  
Inner Packing Size: 700×250×180mm  
Gross Weight: 5.3KG  
Packing Size: 720×530×410mm (4 pcs)  
Total weight: 23.5KG

五彩缤纷激光灯

技术参数:

激光功率: 532nm绿60mw, 650nm红光 (150mw\*1+100mw\*2), 405nm紫光100mw, 532nm绿60mw, 650nm红光 (100mw\*2), 450nm蓝光300mw  
激光颜色: 绿色、红色、紫色、黄、品红或者绿色、红色、蓝色、青、品红  
扫描系统: 高精度步进电机扫描系统,  
控制方式: DMX-512、自走、声控  
控制通道: 5个  
工作环境: 室内(10~35°)  
内包尺寸: 700×250×180mm,  
内包毛重: 5.3KG  
外包装尺寸: 720×530×410mm (4个/箱)  
外包毛重: 23.5KG



F1022/F1022G/F1022B/F1022Y/F1022M/F1022D

Red & Green Double Head Laser Light 红绿双头激光

Technical Parameters:

Power Consumption: 60W max  
Laser Power: F1022: Green(532nm)40mw & Red (650nm) 100mw, F1022G: Green(532nm) 60mw, F1022B: Blue(450nm)500mw, F1022Y: Green(532nm)60mw & Red (650nm) 150mw, F1022M: Blue(450nm)500mw & Red (650nm) 150mw, F1022D: Green(532nm)40mw & Blue (450nm)300mw  
Laser Color: F1022: Green & Red, F1022G: Green, F1022B: Blue, F1022Y: Green & Red & Yellow, F1022M: Blue & Red & fuchsine, F1022D: Green & Blue  
Inner Packing Size: 345×290×165mm  
Gross Weight: 3.3KG  
Packing Size: 910×370×320mm (5 pcs)  
Total weight: 18.5KG

技术参数:

额定功率: <60W  
激光功率: F1022: 绿(532nm)40mw、红 (650nm) 100mw, F1022G: 绿(532nm) 60mw, F1022B: 蓝(450nm)500mw, F1022Y: 绿(532nm)60mw和 红(650nm) 150mw, F1022M: 蓝(450nm)500mw、红(650nm) 150mw, F1022D: 绿(532nm)40mw、蓝(450nm)300mw  
激光颜色: F1022: 绿和红, F1022G: 绿, F1022B: 蓝, F1022Y: 绿、红、黄, F1022M: 蓝、红、品红, F1022D: 绿、蓝  
内包尺寸: 345×290×165mm,  
内包毛重: 3.3KG  
外包装尺寸: 910×370×320mm, (5个/箱)  
外包毛重: 18.5KG





High power green laser landmark can be installed in the top buildings ,such as tourist attractions and other outdoor place ,is a laser application technology, computer image processing technology and speed scanner control of high-tech products .This products used high power green laser ,can deduce dynamic short line ,surface ,rotating and geometric patterns ,also can play text editor.Laser patterns can scan 360-degree , can enjoy its unique laser effects in a far place ,wonderful effects ,robust ,shock, is the city landmark,the famous scenic , can become a shining landmark in the city and the unique urban landscape,urban lighting project a symbol of high quality .

高功率绿激光地标可安装在城市高层大厦顶端, 旅游景点等户外场所, 是集激光应用技术、计算机图像处理技术和超高速振镜控制技术于一体的高科技产品。该产品使用高功率的绿激光, 可在空中演绎出各种动态的线、面、旋转体等几何图案, 也可演绎编辑的各种图形文字。纯粹绚丽的激光图案可360度全方位扫描, 方圆数公里均能观赏到其独特的激光夜景, 视觉效果强劲、震撼, 具有王者风范, 是都市标志性建筑、著名景区的点睛之“笔”, 能使该建筑物活景区成为城市中醒目的地标及独特的城市夜景, 是城市亮化工程中高品位的象征。



**HW-910/920/930/940**

**Laser Landmarks 10W-40W 10W~40W风冷地标激光灯**

**Technical Parameters:**

<b>Power Supply:</b> AC100~240V, 50HZ~60HZ	<b>技术参数:</b> 电源供应: AC100~240V, 50HZ~60HZ
<b>Power Consumption:</b> 1500W max	额定功率: <1500W
<b>Laser Power:</b> 10W-40W	激光功率: 10W-40W
<b>Laser Color:</b> Green(532nm)	激光颜色: 翠绿色(532nm)
<b>Scan System:</b> high speed scanner≥20kpps vibratory mirror system	扫描系统: 高速振镜扫描≥20kpps, 具有完善的过流、过压、过载、过热等监控保护功能
<b>Single line range:</b> 1KM-10KM	单线射程距离: 1KM-10KM
<b>Range Scanning:</b> 1KM-5KM	扫描距离: 1KM-5KM
<b>Pan:</b> 360 degree	扫描角度: 水平360度
<b>Control Software:</b> Pangolin or Phoenix	控制软件: 美国Pangolin(穿山甲), 德国Phoenix(凤凰)
<b>Cool System:</b> fan	冷却方式: 风冷



Laser man is the laser programming, creative dance, music to combine a new laser performers, along with the rhythm of the music, laser dancer seems to have been given life, form time to time with the shadow moving .The beam of light is the best, gorgeous and surprise. applicable for Disco, Clubs, KTV station, pub, bar where the special dancing effect required .

激光人是融合了激光编程、舞蹈创意、音乐制作三位一体的全新激光舞蹈表演形式, 伴随着动感的音乐节奏, 舞者就像光影界的魔术师, 激光仿佛被赋予了生命的灵性 时而光随舞动, 时而人舞交融。每一束光线都是最好的道具, 或绚烂或惊奇。

激光人表演系统一般由激光器、控制软件及表演程序、激光扫描组件、舞台、激光笔等组成。适用于Disco, 演艺吧、夜总会、电视台、歌剧院等要求较高的场所使用。

**F5000-820/830/850/950**

**Laser Man 激光人**

**Technical Parameters:**

<b>Power Supply:</b> AC100~240V, 50HZ~60HZ	<b>技术参数:</b> 电源供应: AC100~240V, 50HZ~60HZ
<b>Power Consumption:</b> 200W max	额定功率: <200W
<b>Laser Power:</b> Green2W/3W/5W or RGB 5W	激光功率: 绿2W/3W/5W或RGB 5W
<b>Laser Color:</b> Green(532nm) or RGB	激光颜色: 翠绿色(532nm)或RGB
<b>Scan System:</b> high speed scanner 40kpps vibratory mirror system	扫描系统: 40kpps振镜扫描
<b>Control Mode:</b> ILDA	控制方式: ILDA
<b>Control Software:</b> Pangolin or Phoenix	控制软件: 美国Pangolin(穿山甲); 德国Phoenix(凤凰)
<b>Operating Environment:</b> 10~35°indoor	工作环境: 室内(10~35°)



**N-P015**

**24 pcs RGBW 4 in 1 LED Waterproof PAR Light**  
24颗 RGBW 4合1 LED 防水 PAR灯

**Technical Parameters:**

<b>Power Supply:</b> AC90~240V, 50HZ~60HZ	<b>技术参数:</b> 电源供应: AC90~240V, 50HZ~60HZ
<b>Power Consumption:</b> 300W	功率: 300W
<b>Light Source:</b> 24 pcs 10W RGBW 4 in 1 LED	光源: 24颗10W RGBW 4合1 LED灯珠
<b>Beam angle:</b> 25°, 40°(optional)	发光角度: 25°, 40°可选
<b>Color:</b> 16.7 million for RGB	颜色: 1670万颜色变化
<b>grade of waterproof:</b> IP65	防水等级: IP65
<b>Control mode:</b> DMX-512, music control, automatic, master & slave	控制方式: DMX-512信号控制, 声控, 自主, 主从
<b>Channel:</b> 7 channels	控制通道: 7通道
<b>Outer cover material:</b> Aluminum body	机壳材料: 铸铝

**N-P016**

**18 pcs RGBW 4 in 1 LED Waterproof PAR Light**  
18颗 RGBW 4合1 LED 防水 PAR灯

**Technical Parameters:**

<b>Power Supply:</b> AC90~240V, 50HZ~60HZ	<b>技术参数:</b> 电源供应: AC90~240V, 50HZ~60HZ
<b>Power Consumption:</b> 200W	功率: 200W
<b>Light Source:</b> 18 pcs 10W RGBW 4 in 1 LED	光源: 18颗10W RGBW 4合1 LED灯珠
<b>Beam angle:</b> 25°, 40°(optional)	发光角度: 25°, 40°可选
<b>Color:</b> 16.7 million for RGB	颜色: 1670万颜色变化
<b>grade of waterproof:</b> IP65	防水等级: IP65
<b>Control mode:</b> DMX-512, music control, automatic, master & slave	控制方式: DMX-512信号控制, 声控, 自主, 主从
<b>Channel:</b> 7 channels	控制通道: 7通道
<b>Outer cover material:</b> Aluminum body	机壳材料: 铸铝



**N-P017**

**12pcs RGBW 4 in 1 LED Waterproof PAR Light**  
12颗 RGBW 4合1 LED 防水 PAR灯

**Technical Parameters:**

<b>Power Supply:</b> AC90~240V, 50HZ~60HZ	<b>技术参数:</b> 电源供应: AC90~240V, 50HZ~60HZ
<b>Power Consumption:</b> 150W	功率: 150W
<b>Light Source:</b> 12 pcs 10W RGBW 4 in 1 LED	光源: 12颗10W RGBW 4合1 LED灯珠
<b>Beam angle:</b> 25°, 40°(optional)	发光角度: 25°, 40°可选
<b>Color:</b> 16.7 million for RGB	颜色: 1670万颜色变化
<b>grade of waterproof:</b> IP65	防水等级: IP65
<b>Control mode:</b> DMX-512, music control, automatic, master & slave	控制方式: DMX-512信号控制, 声控, 自主, 主从
<b>Channel:</b> 7 channels	控制通道: 7通道
<b>Outer cover material:</b> Aluminum body	机壳材料: 铸铝







**N-P018**

24 pcs RGBW 4 in 1 LED PAR Light  
24颗 RGBW 4合1 LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 300W  
**Light Source:** 24 pcs 10W RGBW 4 in 1 LED  
**Beam angle:** 25°, 40°(optional)  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 7 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 300W  
光源: 24颗10W RGBW 4合1 LED灯珠  
发光角度: 25°, 40°可选  
颜色: 1670万颜色变化  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 7通道  
机壳材料: 铸铝



**N-P019**

18 pcs RGBW 4 in 1 LED PAR Light  
18颗 RGBW 4合1 LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 200W  
**Light Source:** 18 pcs 10W RGBW 4 in 1 LED  
**Beam angle:** 25°, 40°(optional)  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 7 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 200W  
光源: 18颗10W RGBW 4合1 LED灯珠  
发光角度: 25°, 40°可选  
颜色: 1670万颜色变化  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 7通道  
机壳材料: 铸铝



**N-P020**

12 pcs RGBW 4 in 1 LED PAR Light  
12颗 RGBW 4合1 LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 200W  
**Light Source:** 12 pcs 10W RGBW 4 in 1 LED  
**Beam angle:** 25°, 40°(optional)  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 7 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 200W  
光源: 12颗10W RGBW 4合1 LED灯珠  
发光角度: 25°, 40°可选  
颜色: 1670万颜色变化  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 7通道  
机壳材料: 铸铝



**N-P007/ N-P008**

36 pcs LED Waterproof PAR Light  
36颗 LED 防水 PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 120W  
**Light Source:** High power 1W or 3W LED,  
36 pcs of leds: 12 Red, 12 Green, 12Blue  
**Beam angle:** 15°, 25°, 45°(optional)  
**Color:** 16.7 million for RGB  
**grade of waterproof:** IP65  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 6 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 120W  
光源: 36颗1W/3W高功率LED(红色12颗, 绿色12颗, 蓝色12颗)  
发光角度: 15°, 25°, 45°可选  
颜色: 1670万颜色变化  
防水等级: IP65  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 6通道  
机壳材料: 铸铝



**N-P009/ N-P010**

54 pcs LED Waterproof PAR Light  
54颗LED防水 PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 120W/200W  
**Light Source:** High power 1W or 3W LED,  
54 pcs of leds: 16Red, 16Green, 16Blue, 6White  
**Beam angle:** 15°, 25°, 45°(optional)  
**Color:** 16.7 million for RGB  
**grade of waterproof:** IP65  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 7 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 120W/200W  
光源: 54颗1W/3W高功率LED(红色16颗, 绿色16颗, 蓝色16颗, 白光6颗)  
发光角度: 15°, 25°, 45°可选  
颜色: 1670万颜色变化  
防水等级: IP65  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 7通道  
机壳材料: 铸铝



**N-P011/ N-P012**

120 pcs LED PAR Light  
120颗LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90~240V, 50HZ~60HZ  
**Power Consumption:** 150W/400W  
**Light Source:** High power 1W or 3W LED,  
120 pcs of leds  
**Beam angle:** 15°, 25°, 45°(optional)  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic, master & slave  
**Channel:** 4/8 channels  
**Outer cover material:** Aluminum body

**技术参数:**

电源供应: AC90~240V, 50Hz~60Hz  
功率: 150W/400W  
光源: 120颗1W/3W高功率LED  
发光角度: 15°, 25°, 45°可选  
颜色: 1670万颜色变化  
控制方式: DMX-512信号控制, 声控, 自走, 主从  
控制通道: 4/8通道  
机壳材料: 铸铝





**N-P001/N-P002**

LED PAR Light LED PAR灯

**Technical Parameters:**

**Power Supply:** AC110V/AC230V 50HZ-60HZ  
**Power Consumption:** 25W  
**Light Source:** 139/183 pcs Φ10 LEDs  
**Color:** RGB color mixing  
**Function:** Color Changing, Strobe, Speed  
Luminance adjustable, etc.  
**Control mode:** DMX-512 signal control, automatic  
**Channel:** 4 channels  
**Outer cover material:** Aluminium, black and white  
**Operating Environment:** indoor

**技术参数:**

**额定电压:** AC110V/AC230V 50Hz-60Hz  
**功率:** 25W  
**光源:** 139/183颗高亮度Φ10 LED  
**颜色:** RGB混色  
**功能:** 颜色变化、频闪、速度、亮度调节  
**控制方式:** DMX-512信号控制、自主  
**控制通道:** 4通道  
**机壳材料:** 铝、有黑色和白色  
**工作环境:** 室内



**N-P003 / N-P004**

36 pcs LED PAR Light 36颗 LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90-240V 50HZ-60HZ  
**Power Consumption:** 120W max  
**Light Source:** High power 1W or 3W LED,  
**36 pcs of leds:** 12 Red, 12 Green, 12Blue  
**Beam angle:** 15°, 25°, 45° optional  
**Color:** RGB color mixing  
**Function:** Color Changing, Strobe, Speed  
Luminance adjustable, etc.  
**Control mode:** DMX-512, music control,  
automatic, master & slave  
**Channel:** 6 channels  
**Outer cover material:** Aluminium, black and white  
**Operating Environment:** indoor

**技术参数:**

**额定电压:** AC90-240V 50Hz-60Hz  
**功率:** <120W  
**光源:** 36颗1W/3W高功率LED (红色12颗,  
绿色12颗, 蓝色12颗)  
**发光角度:** 15°、25°、45°可选  
**颜色:** RGB混色  
**功能:** 颜色变化、频闪、渐变、  
速度、亮度调节  
**控制方式:** DMX-512, 声控、自主、主从  
**控制通道:** 6通道  
**机壳材料:** 铝、有黑色和白色  
**工作环境:** 室内



**N-P005 / N-P006**

36 pcs LED PAR Light 36颗 LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90-240V, 50HZ-60HZ  
**Power Consumption:** 60W/120W  
**Light Source:** High power 1W or 3W LED,  
**36 pcs of leds:** 12 Red, 12 Green, 12Blue  
**Beam angle:** 15°, 25°, 45° optional  
**Color:** RGB color mixing  
**Function:** Color Changing, Strobe,  
Speed / Luminance adjustable, etc.  
**Control mode:** DMX-512, music control,  
automatic, master & slave  
**Channel:** 6 channels  
**Outer cover material:** Aluminium  
**Operating Environment:** indoor

**技术参数:**

**电源供应:** AC90-240V, 50Hz-60Hz  
**功率:** 60W/120W  
**光源:** 36颗1W/3W高功率LED (红色12颗,  
绿色12颗, 蓝色12颗)  
**发光角度:** 15°、25°、45°可选  
**颜色:** RGB混色  
**功能:** 颜色变化、频闪、渐变、  
速度/亮度调节  
**控制方式:** DMX-512, 声控、自主、主从  
**控制通道:** 6通道  
**机壳材料:** 铝  
**工作环境:** 室内



**N-P013/ N-P014**

54 pcs LED PAR Light 54颗LED PAR灯

**Technical Parameters:**

**Power Supply:** AC90-240V, 50HZ-60HZ  
**Power Consumption:** 120W/200W  
**Light Source:** High power 1W or 3W LED,  
**54 pcs of leds:** 16Red, 16Green, 16Blue, 6White  
**Beam angle:** 15°, 25°, 45° optional  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control,  
automatic, master & slave  
**Channel:** 7 channels  
**Outer cover material:** Aluminum body, black

**技术参数:**

**电源供应:** AC90-240V, 50Hz-60Hz  
**功率:** 120W/200W  
**光源:** 54颗1W/3W高功率LED (红色16颗,  
绿色16颗, 蓝色16颗, 白光6颗)  
**发光角度:** 15°、25°、45°可选  
**颜色:** 1670万颜色变化  
**控制方式:** DMX-512信号控制、声控、自  
自主、主从  
**控制通道:** 7通道  
**机壳材料:** 铸铝



**N-Y001/N-Y002**

108 pcs LED Moving Head Light  
108颗LED摇头灯

**Technical Parameters:**

**Power Supply:** AC90-240V, 50HZ-60HZ  
**Power Consumption:** 60W/150W  
**Light Source:** High power 1W or 3W LED,  
**108 pcs of leds:** Red:30, Green:27, Blue:27,White:24  
**Beam angle:** 15°, 25°, 45° optional  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control,  
automatic, master & slave  
**Channel:** 6/12 channels  
**Grade of waterproof:** IP65  
**Outer cover material:** Aluminum body

**技术参数:**

**电源供应:** AC90-240V, 50Hz-60Hz  
**功率:** 60W/150W  
**光源:** 108颗1W或3W高功率LED (红色30颗,  
绿色27颗, 蓝色27颗, 白色24颗)  
**发光角度:** 15°、25°、45°可选  
**颜色:** 1670万颜色变化  
**控制方式:** DMX-512信号控制、声控、  
自主、主从  
**控制通道:** 6/12通道  
**防水等级:** IP65  
**机壳材料:** 铸铝



**N-Y003**

36Pcs 10W RGBW 4 in 1 LED Moving Head Light  
36颗10W全彩4合1 LED摇头灯

**Technical Parameters:**

**Power Supply:** AC90-240V, 50HZ-60HZ  
**Power Consumption:** 400W  
**Light Source:** 36 pcs 10W RGBW 4 in 1 LED  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic,  
master & slave  
**Channel:** 6/12 channels  
**Outer cover material:** Aluminum body

**技术参数:**

**电源供应:** AC90-240V, 50Hz-60Hz  
**功率:** 400W  
**光源:** 36颗10W 全彩4合1 灯珠  
**颜色:** 1670万颜色变化  
**控制方式:** DMX-512信号控制、声控、自  
走、主从  
**控制通道:** 6/12通道  
**机壳材料:** 铸铝



**N-Y004**

36 Pcs 3W LED Moving Head Beam Light  
36颗3W LED摇头光束灯

**Technical Parameters:**

**Power Supply:** AC90-240V, 50HZ-60HZ  
**Power Consumption:** 250W  
**Light Source:** 36 pcs 3W LED  
**Color:** 16.7 million for RGB  
**Control mode:** DMX-512, music control, automatic,  
master & slave  
**Outer cover material:** Aluminum body

**技术参数:**

**技术参数:**  
**电源供应:** AC90-240V, 50Hz-60Hz  
**功率:** 200W  
**光源:** 36颗3W 灯珠  
**颜色:** 1670万颜色变化  
**控制方式:** DMX-512信号控制、声控、自  
走、主从  
**机壳材料:** 铸铝





N-C2024

Controller 2024 控台 2024

Technical Parameters:

**Power supply:** DC9V 10 00mA  
DMX512/1990 Standard, 504 channels  
Up to 20 scanners may be connected with a maximum of 24 channels each 24 channels for dimmers  
8 slider for manual control of channels  
assignable joystick for ease of movement  
24 chases (at most 40 steps for each chase)  
960 chase steps  
Each chase speed and cross time can be saved automatic  
128 K high capacity memory card  
The Data auto-saves  
**DMX signal output connector:** XLR-D3F  
**Size:** 485mm x 250mm x 91mm  
**Net Weight:** 5Kg

技术参数:

电源输入: DC9V 10 00mA  
DMX512/1990信号输出, 504个控制通道  
可同时控制20台24通道电脑灯+24调光通道  
8个通道的控制推子  
一个可设置的摇杆装置  
24个走灯程序, 每个程序最大40步  
共960个电脑灯走灯程序步  
各程序速度, 渐变道自动记忆  
128K 大容量记忆  
关机数据保存  
DMX信号输出连接器: XLR-D3F  
外形尺寸: 485mm x 250mm x 91mm  
重量: 5kg



N-C1216

Controller 1216 控台 1216

Technical Parameters:

**Power supply:** DC9V 10 00mA  
DMX512/1990 Standard, 240 channels  
Up to 12 scanners may be connected with a maximum of 16 channels each 24 channels for dimmers, 24 channels for switch of lamp  
8 slider for manual control of channels  
assignable joystick for ease of movement  
12 chases (at most 40 steps for each chase)  
480 chase steps  
Each chase speed and cross time can be saved automatic  
128 K high capacity memory card  
The Data auto-saves  
**DMX signal output connector:** XLR-D3F  
**Size:** 485mm x 250mm x 81mm  
**Net Weight:** 5Kg

技术参数:

电源输入: DC9V 10 00mA  
DMX512/1990信号输出, 408个控制通道  
可同时控制12台16通道电脑灯+24调光通道+24开关通道  
8个通道的控制推子  
一个可设置的摇杆装置  
12个走灯程序, 每个程序最大40步  
共480个电脑灯走灯程序步  
各程序速度, 渐变道自动记忆  
128K 大容量记忆  
关机数据保存  
DMX信号输出连接器: XLR-D3F  
外形尺寸: 485mm x 250mm x 91mm  
重量: 5kg



N-C240A

Controller 240A 控台 240A

Technical Parameters:

**Power input:** DC 9-12V 300mA min  
12 scanners of 16 channels each  
30 banks have 8 programmable scenes each  
6 programmable chases have 240 scenes each  
8 slider for manual control of channels  
2 assignable wheels for ease of movement  
auto mode program controlled by speed and fade time sliders  
fade time/assign fade time  
reversible DMX channels fixture to react in opposition to others in a chase  
8 channel or 16 channel mode  
fine adjustment for Wheel pan and tilt  
blackout master button  
manual override button allow you to grab any fixture on the fly  
built in microphone for music triggering  
midi control over banks, chases and blackout  
power failure memory  
**Dimensions(mm):** 482 x 190 x 90  
**Net Weight:** 3.0Kg

技术参数:

电源输入: DC 9-12V 300mA  
最多可控制12台电脑灯, 每台电脑灯最多16个通道  
可编程30个记忆储存 (Bank), 每个可存储8个场景 (Scene)  
6个可编程程序 (Chase), 每个程序可编240步 (即30个Bank Scene)  
8个通道控制推子  
两个手控轮  
在自动运行模式中, FADE可选择全部具有ALL或X/Y, 具有FADE, 都具有SPEED调节, 8通道或16通道工作模式  
数码轮装置可对灯具的水平/垂直运动进行微调  
具Blackout输出  
内置麦克风, MID控制  
掉电记忆保护  
尺寸: 482mm x 190mm x 90mm  
重量: 3.0KG



N-C512A

Controller 512A 控台 512A

Technical Parameters:

**Power supply:** DC9V 1000mA  
DMX512/1990 Standard, 512 channels  
Up to 32 scanners may be connected with a maximum of 16 channels each  
assignable joystick for easy of movement,  
four keys fine adjustment  
8 chases and 32 scenes can be run at the same time  
32 chases (at most 120 steps for each chase)  
3840 chase steps  
The music trigger source can be selected between audio line input or in-build microphone  
The Data auto-saves  
**DMX signal output connector:** XLR-D3F X4  
**Size:** 482mm x 300mm x 100mm  
**Net Weight:** 6Kg

技术参数:

电源输入: DC9V 1000mA  
DMX512/1990信号输出  
512个控制通道  
可同时控制32台16通道电脑灯  
16个通道的控制推子  
一个可设置的摇杆装置  
可同时运行8个走灯程序和32个场景  
32个走灯程序, 每个程序最大120步  
共3840个电脑灯走灯程序步  
走灯音乐同步, 线路电平-10dB--+10dB  
自适应/机内话筒  
关机数据保存  
DMX信号输出连接器: XLR-D3F x 4  
外形尺寸: 482mm x 300mm x 110mm  
重量: 6.0KG



N-CS512

Controller S512 控台 S512

Technical Parameters:

**Power input:** DC9V 1000mA  
DMX512/1990 standard, 512 DMX control channels,  
4 output with optical isolated, withstand 2000Vrms.  
Up to 32 scanners may be connected with a maximum of 16 channels each.  
A large backlight LCD to display operation parameters.  
16 sliders for channel, 1 slider for speed control.  
1600 chases steps, 48 chases, up to 100 steps each.  
Each step contains its speed and cross time, can be set respectively. Trigger mode selectable: Music synchronously and manual speed.  
Cooperating with the chase speed slider, the time of the program step can be changed from 0.03s to 180s.  
48 scanner scenes can be used directly  
8 chases, 48 scenes operated at the same time.  
At most 32 scanners can be selected  
15 environment programs to output the combination, which are composed of different scenes, chases and manual output quickly.  
Dimension: 498 x 420 x 115mm  
Net Weight: 6.5Kg

技术参数:

电源输入: DC9V 1000mA  
DMX512/1990标准, 512个DMX控制通道  
2路带光隔离的独立输出驱动端口, 具有抗2000VDC电气冲击能力。  
可控制32台16通道电脑灯。  
带背光的大屏幕LCD显示各种运行参数。  
16个通道推杆, 1个速度控制推杆。  
1600个走灯程序步储存容量, 48个走灯程序, 每程序最多100步, 每步速度、渐变参数独立设置, 可选音乐同步或手动速度控制。  
在走灯速率推杆的配合下, 程序步的时间范围可从0.03S-180S。  
48个可直接调用的电脑灯场景。  
可同时运行8个走灯程序, 48个场景, 并可同时对32台电脑灯运行手动运行 (提灯)。  
15个环境键, 快速调用不同的场景、走灯、手动运行组合。  
尺寸: 498mm x 420mm x 115mm  
重量: 6.5KG



N-C200

Controller 200 控台 200

Technical Parameters:

**Power input:** DC 9-12V 1000mA min  
DMX512/1990 Standard  
Total of 192 output channels  
30 banks have 8 programmable scenes each  
16 slider for manual control of channels  
Midi control over banks, chases and Blackout  
Record up to 8 programmable chases with fade time and speeds  
LED function and program display  
Built in microphone for music triggering  
Auto mode program controlled by fade time sliders  
**Dimensions:** 520mm x 183mm x 73mm  
**Net Weight:** 3.0kg

技术参数:

电源输入: DC9V 1000mA  
DMX512/1990信号输出, 192控制通道  
有30个BANKS, 每个BANKS有8个可编程的SCENES  
有16个可调位器调节输出大小, 内置MIC头, 提供声音触发, 在自动触发状态下, 通过TAP SYNC键或SPEED电位器确定自动触发时间在MIDI接口, 可随时用MIDI信号控制, 4位数码显示屏, BLACK OUT功能可用于手动或MIDI做提灯控制, CHASES编程和CHASES运动功能, 可用手动或MIDI做提灯控制输出延时功能, 用FADE TIME电位器调节延时时间  
外形尺寸: 520mm x 183mm x 73mm  
重量: 3.0KG





**AB-1500**



**Power:** 1500W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat-up Time:** 12 minutes  
**Tank capacity:** 2L  
**Approx. Fog Projection:** 12 M  
**Output:** 2000cu.ft/min  
**Control mode:** Circuitry Control, Remote Control  
**Weight:** 7.4KG  
**Size:** 46.5\*22.5\*19.5(cm)  
**功率:** 1500W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 12分钟  
**油箱容量:** 2L  
**喷油距离:** 12米  
**喷油量:** 2000cu.ft/min  
**控制模式:** 线控、遥控  
**重量:** 7.4KG  
**尺寸:** 46.5\*22.5\*19.5(cm)

**S-1200**



**Power:** 1200W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Tank capacity:** 5L  
**Output:** 80 Cubic Meters  
**Control mode:** DMX512,Circuitry Control, Remote Control  
**Weight:** 11KG  
**Size:** 51.5\*31\*23(cm)  
**功率:** 1200W  
**工作电压:** AC110V,220-250V 50/60Hz  
**油箱容量:** 5L  
**喷油量:** 80 Cubic Meters  
**控制模式:** DMX512、线控、遥控  
**重量:** 11KG  
**尺寸:** 51.5\*31\*23(cm)

**AB-1200**



**Power:** 1200W  
**Voltage:** AC110V, 220-250V 50/60Hz  
**Heat-up Time:** 8 minutes  
**Tank capacity:** 2L  
**Approx. Fog Projection:** 10 M  
**Output:** 1800cu.ft/min  
**Control mode:** Circuitry Control, Remote Control  
**Weight:** 6.8KG  
**Size:** 49.5\*23\*14(cm)  
**功率:** 1200W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 8分钟  
**油箱容量:** 2L  
**喷油距离:** 10米  
**喷油量:** 1800cu.ft/min  
**控制模式:** 线控、遥控  
**重量:** 6.8KG  
**尺寸:** 49.5\*23\*14(cm)

**T-400**



**Power:** 400W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat up Time:** 8 minutes  
**Tank capacity:** 0.3L  
**Output:** 2000cu.ft/min  
**Control mode:** Circuitry Control  
**Weight:** 2.5 KG  
**Size:** 23\*11\*11(cm)  
**功率:** 400W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 8分钟  
**油箱容量:** 0.3L  
**喷油距离:** 8米  
**喷油量:** 2000cu.ft/min  
**控制模式:** 线控  
**重量:** 2.5KG  
**尺寸:** 23\*11\*11(cm)

**F-3000R**



**Power:** 3000W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat-up Time:** 12 minutes  
**Tank capacity:** 10L  
**Output:** 4000cu.ft/min  
**Control mode:** DMX512,Manual Controller, Remote Control  
**Weight:** 20KG  
**Size:** 72\*31\*18(cm)  
**功率:** 3000W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 12分钟  
**油箱容量:** 10L  
**喷油量:** 4000cu.ft/min  
**控制模式:** DMX512、线控、遥控  
**重量:** 20KG  
**尺寸:** 72\*31\*18(cm)

**Z-800**



**Power:** 900W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat-up Time:** 7 minutes  
**Tank capacity:** 1L  
**Output:** 5000cu.ft/min  
**Control mode:** Circuitry Control  
**Weight:** 4KG  
**Size:** 33\*17\*14(cm)  
**功率:** 900W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 7分钟  
**油箱容量:** 1L  
**喷油量:** 5000cu.ft/min  
**控制模式:** 线控  
**重量:** 4KG  
**尺寸:** 33\*17\*14(cm)

**AB-900**



**Power:** 900W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat-up Time:** 6 minutes  
**Tank capacity:** 1L  
**Approx. Fog Projection:** 8 M  
**Output:** 5000cu.ft/min  
**Control mode:** Circuitry Control, Remote Control  
**Weight:** 4.6KG  
**Size:** 33.5\*19\*14(cm)  
**功率:** 900W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 6分钟  
**油箱容量:** 1L  
**喷油距离:** 8米  
**喷油量:** 5000cu.ft/min  
**控制模式:** 线控、遥控  
**重量:** 4.6KG  
**尺寸:** 33.5\*19\*14(cm)

**B-300**



**Power:** 300W  
**Voltage:** AC110V,220-250V 50/60Hz  
**Heat up Time:** 8 minutes  
**Tank capacity:** 2.5L  
**Blowing Height:** 10 M  
**Output:** 600 cubic meters  
**Control mode:** Remote Control  
**Weight:** 14KG  
**Size:** 45\*30\*41(cm)  
**功率:** 300W  
**工作电压:** AC110V,220-250V 50/60Hz  
**预热时间:** 8分钟  
**油箱容量:** 2.5L  
**喷油距离:** 10米  
**喷油量:** 600 cubic meters  
**控制模式:** 线控  
**重量:** 14KG  
**尺寸:** 45\*30\*41(cm)

保险绳 / Safety rope



灯架 / Stand



重烟油 Heavy Fog Oil    DJ烟油 DJ Fog Oil    烟油 Fog Oil    德国油 Germany Fog Oil    雪花油 Snow Oil    泡泡油 Bubble Oil    喷火油 Fire Machine Oil

灯钩 / Lighthook



玻璃球 / Glass Ball Light



色片 / Color Filter (1x40mm)



航空箱 / Fly Box



光源

Lamp With Different Measurement

