



2010年上海展




2011年广州展



2011年上海展



2012年北京展



2013年北京展



2012年广州展



2013年广州展



2014年广州展



2015年广州展



2015年北京展



2016年广州展



2016年德国展



工程案例
Project case



2009年上海五月天演唱会



2010年成都中国会所



2016苏州沙井
苏格缪斯酒吧



2012年邵武元宵焰火晚会



2014-2017宝乐迪全国连锁KTV



2016南宁星悦里PTV


N-Y028

60W LED pattern moving head light
嵌入式60W LED摇头图案灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 90W
LED source: 60W LED
Color: 11 color + white + rainbow effect
Pattern: 10 pattern + white + rainbow effect
Prism: 3pcs of prism/8pcs of prism
Focus: linear focus
Dimmer: 0-100% linear adjustment
Strobe speed: 1-25times/second
Control channel: 11/14CHs
Pan/Tilt: X axis 540°, Y axis 270°
Control mode: DMX-512, automatic, master & slave, sound

Working environment: indoor (10-35°)
Net weight: 5.3KG
Box size: 390X295X335mm
Master carton size: 925X410X360mm 3pcs in 1
Installation: hang on to the wall or ceiling installation
Product feature: this product is with delicate outlook, easy installation, ultra-high brightness, clear pattern, vivid color, biprisms optical path is taken, and plenty of patterns with strong beam. It is also a very good product with best price, and which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 90W
光源: 60W LED
颜色: 11种颜色+白光+彩虹效果
图案: 10种图案+白光+彩虹效果
棱镜: 3棱镜、8棱镜可选
调焦: 线性调焦
调光: 0-100%线性调节
频闪速度: 1-25次/秒
通道模式: 11CHS、14CHS
X轴角度: 水平540度
Y轴角度: 垂直270度
控制模式: DMX-512, 自走, 声控, 主从模式
工作环境: 室内 (10-35°)
净重: 5.3KG
包装尺寸: 390X295X335mm
包装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 超高亮度, 图案清晰, 色彩鲜明, 采用双棱镜光路, 图案效果丰富饱满光束感强, 是一款性价比高的LED摇头图案灯, 适用于KTV、酒吧、小型酒吧等



N-Y029/Y029A

COB wash moving head light
嵌入式摇头染色灯

Technical Parameters:
Power Supply: AC90V-AC240V, 50Hz/60Hz
Power consumption: 70W
LED source: COB RGB 40W/80W
Color: RGB mixed color
Dimmer: 0-100% linear adjustment
Strobe speed: 1-20times/second
Control channel: 9/14CHs
Pan/Tilt: X axis 540°, Y axis 270°
Control mode: DMX-512, automatic, master & slave, sound

Working environment: indoor (10-35°)
Net weight: 3.2KG
Box size: 335X275X305mm
Master carton size: 570X355X640mm 4pcs in 1
Installation: hang on to the wall or ceiling installation
Product feature: this product is with delicate outlook, easy installation, perfect brightness, vivid color, we use imported chip for this COB light, and with long life span which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: COB RGB 40W/80W
颜色: RGB无极混色
调光: 0-100%线性调节
频闪速度: 1-20次/秒
通道模式: 9CHS、14CHS
X轴角度: 水平540度
Y轴角度: 垂直270度
控制模式: DMX-512, 自走, 声控, 主从模式
工作环境: 室内 (10-35°)
净重: 3.2KG
包装尺寸: 335X275X305mm
包装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 亮度均匀, 色彩鲜明, 采用进口芯片的COB集成光源, 使用寿命长, 是一款性价比高的LED摇头染色灯, 适用于KTV、酒吧、小型酒吧等



N-Y705/Y605/Y610/Y620/Y305/Y310/Y320/Y330

RGB/Single color animation laser moving head light
嵌入式摇头全彩/单色动画激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 70W
Laser diode: RGB 500mw, G100mw-2000mw, B500mw-3000mw
Color: RGB, Green or Blue
Laser wavelength: Green: 532nm or 520nm
Red: 650nm or 638nm Blue: 450nm
Laser pattern: 15 groups with 3800 patterns
Scan system: 20Kpps
Control channel: 10/40CHs
Pan/Tilt: X axis 540°, Y axis 270°
Control mode: DMX-512, automatic, sound, master & slave, SD card (optional)
Working environment: indoor (10-35°)
Net weight: 3.8KG
Box size: 390X295X335mm
Master carton size: 925X410X360mm 3pcs in 1
Installation: hang on to the wall

Product feature: this product is with delicate outlook, easy installation, plenty of patterns, vivid color, we use big storage and high speed single chip technique for this light, most importantly the storage is 15groups and you can have more than 1900pcs of patterns, This is a new and good product which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: 全彩500mw 绿光100mw--2W 蓝光500mw--3W
激光波长: 绿光: 532nm或520nm
红光: 650nm或638nm, 蓝光: 450nm
激光图案: 15组图案库每组255个共3800个图案
扫描系统: 20kpps扫描
控制方式: DMX-512, 声控, 自走, 主从, SD卡控制 (可选)
通道模式: 10CHS、40CHS
X轴角度: 水平540度
Y轴角度: 垂直270度
包装尺寸: 390X295X335mm
包装方式: 外挂/吸顶
工作环境: 室内 (10-35°)
净重: 3.8KG
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 图案丰富, 色彩鲜明, 采用大容量、高速的单片技术, 图案多达15组, 图案1900多个, 是一款性价比高的摇头激光灯, 适用于KTV、酒吧、小型酒吧等



N-Y006

6Eyes LED beam moving head light
嵌入式花开花合光束灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 100W
LED source: 6pcs 15W RGBW 4 in 1
Color: RGBW
Dimmer: Grade 65536 electronic dimmable
Strobe speed: 1-30times/second
Beam angle: 1.5°
Beam rotation: 360°infinite rotation
Control channel: 10/17CHs
Pan/Tilt: X axis 540°, Y axis 180°
Control mode: DMX-512, automatic, master & slave, sound
Operating environment: indoor (10-35°)
Net weight: 3.8KG
Box size: 310X210X365mm
Master carton size: 450X330X390mm 2pcs in 1

Installation: hang on to the wall
Product feature: this product is with delicate outlook, easy installation, strong beam, vivid color with rainbow effect, we use 4 in 1 led for this beam light, and with long life span which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 100W
光源: 6颗 15W RGBW四合一灯珠
颜色: RGBW
调光: 65536级电子调光
频闪速度: 1-30次/秒
控制方式: DMX-512, 声控, 自走
光束角度: 1.5°
光束旋转: 360°无限旋转
通道模式: 10CHS、17CHS
X轴角度: 水平540°
Y轴角度: 垂直180°
净重: 3.8KG
工作环境: 室内 (10-35°)
包装尺寸: 310X210X365mm
包装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 颜色丰富多变, 光束立体感强, 多彩旋转流动彩虹效果, 采用大功率四合一光源, 使用寿命长, 适用于KTV、酒吧、小型酒吧等



工程案例

Project case



2013年恩平88BAR



2012年台北灯会



2016西塘嗨森酒吧



2016年南昌金唛KTV



2016湖北宜昌
苏格缪斯酒吧




2014-2017福建欢唱连锁KTV



2016东莞港K party

2016南宁唱爽KTV



N-Y036

LED infinite beam light
嵌入式四眼无极光束

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 70W
LED source: 4PCS 15W RGBW 4 in 1 LED
Color: RGBW
Dimmer: 0-100% linear adjustment
Strobe speed: 1-20times/second
Beam rotation: 360° infinite rotation
Beam angle: 1.5°
Control channel: 8CHs
Control mode: DMX-512, automatic, sound, master & slave
Working environment: indoor (10-35°)
Net weight: 2.8KG
Box size: 335X275X305mm
Master carton size: 570X355X640mm 4pcs in 1
Installation: hang on to the wall
Product feature: this product is with delicate outlook, easy installation, strong beam, vivid color with rainbow effect, we use 4 in 1 led for this beam light, and with long life span which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: 4颗15瓦RGBW四合一灯珠
颜色: RGBW
调光: 0-100%线性调节
频闪速度: 1-20次/秒
光束旋转: 360°无限旋转
控制方式: DMX-512, 声控, 自走, 主从模式
通道: 8CHs
光束角度: 1.5°
工作环境: 室内 (10-35°)
净重: 2.8KG
包装尺寸: 335X275X305mm
包装尺寸: 570X355X640mm 4个装
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 颜色造型丰富多变, 光束立体感强, 多彩旋转流动彩虹效果, 采用大功率四合一光源, 使用寿命长, 适用于KTV, 酒吧, 小型酒吧等

N-Y1601/Y1602/Y1605/Y1610/Y1305/Y1310/Y1320/Y1330

Single color animation laser light
嵌入式单色动画激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 70w
Laser diode: G100mw-1000mw, B500mw-3000mw
Color: RGB, Green or Blue
Laser wavelength: 532nm or 520nm
Blue: 450nm
Laser pattern: 15 groups with 3800 patterns or 128 pcs
Scan system: 15-20Kpps
Control mode: DMX-512, automatic, sound, master & slave, SD card (optional)
Control channel: 34/10CHs
Working environment: indoor (10-35°)
Net weight: 2.8KG
Box size: 390X295X335mm
Master carton size: 925X410X360mm 3pcs in 1
Installation: hang on to the wall or ceiling installation


技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: 绿光100mw-1W 蓝光500mw-3W
激光波长: 绿光: 532nm/520nm 蓝光: 450nm
激光图案: 15组图案库, 每组255个, 共3800个图案或128幅图案
扫描系统: 15-20kpps振镜
控制方式: DMX-512, 声控, 自走, 主从, SD卡控制 (可选)
通道模式: 34CHS, 10CHS
工作环境: 室内 (10-35°)
净重: 2.8KG
包装尺寸: 390X295X335mm
包装尺寸: 925X410X360mm 3个装
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 图案丰富, 色彩鲜明, 采用大容量、高速的单片机技术, 图库多达15组, 图案1900多个, 是一款性价比高的激光灯, 适用于KTV, 酒吧, 小型酒吧等



N-X028/N-X028A

LED star light LED 明星灯
Technical Parameters:
Power Supply: AC100-240V, 50HZ-60HZ
Power consumption: 15W
Light Source: 1 pc 10W (RGBW 4 IN 1)/1pc 3-10W White LED
Color: 7 colors or white
Control mode: music control, automatic, Induction control (optional)
Operating Environment: indoor
Box size: 185X185X190mm


技术参数:
额定电压: AC100-240V, 50HZ-60HZ
功率: 15W
光源: 1颗10W (RGBW 4 in 1) 或 1颗3-10W 白色LED
颜色: 七彩或白色
控制方式: 自走, 声控, 感应控制 (可选)
工作环境: 室内
包装尺寸: 185X185X190mm



N-X029A/N-X029

LED Water Effect Light LED 水纹灯
Technical Parameters:
Power Supply: AC110V/AC230V, 50HZ-60HZ
Power consumption: 30W
Light Source: 1 pcs 10W CREE LED
Color: 1/4 color:
Control mode: automatic or Induction control or DMX512
Operating Environment: Indoor

技术参数:
额定电压: AC110V/AC230V, 50HZ-60HZ
功率: 30W
光源: 1颗10W CREE灯珠
颜色: 单色或4色
控制方式: 仅自走或感应或DMX512
工作环境: 室内



FX203/FX206

RG/RB laser Water Effect Light
吸顶红绿红蓝激光炫影灯

Technical Parameters:
Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100-150mw / Green (532nm) 60-80mw/Blue(450nm) 200-1000mw
Laser Color: red & green or red & blue
Control Mode: DMX512, music control, automatic
Operating Environment: 10-35° indoor

技术参数:
电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 650nm红光100-150mw, 532nm绿色60-80mw, 450nm蓝色200-1000mw
激光颜色: 红色和绿色或红色和蓝色
控制方式: DMX512, 声控, 自走
工作环境: 室内 (10-35°)



FX316/FX316B/FX312/FX312B

RG/RB 16 in 1/12 in 1 grating Ceiling laser
Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100-150mw
Green(532nm) 50-100mw
Blue(450nm) 200-1000mw
Laser Color: red & green or red & blue
Laser Patterns: 16/12pcs
Control Mode: DMX512, music control, automatic
Operating Environment: 10-35° indoor

红绿/红蓝吸顶16合一/12合一
技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 650nm红光100-150mw, 532nm绿色50-100mw, 450nm蓝色200-1000mw
激光颜色: 红色和绿色或红色和蓝色
激光图案: 16/12个
控制方式: DMX512, 声控, 自走
工作环境: 室内 (10-35°)





N-Y027

7 pcs RGBW(4 in 1) LED Moving Light
Technical Parameters:

Technical Parameters:
Power supply: AC100-240V, 50/60Hz
Power Consumption: 100w
Light Source: 7 pcs 10W (RGBW 4 in 1) LED
Channel: 9 or 14 channels
Stroboscopic: 1-25 times per second
Level Scanning: 540° (16 bit precision scan)
Vertical Scan: 180° (16 bit precision scan)
Smooth linear dimming: 0-100% dimmer
color: RGBW full color
Control mode : DMX-512, music control,
automatic, master & slave
Box size: 270X222X253mm
Master carton size: 490X290X535mm
4pcs in 1
Net weight: 2.8KG

7颗RGBW四合一LED摇头染色灯
技术参数:
输入电压: AC100-240V, 50Hz-60Hz
最大功率: 100W
光源: 7颗10W RGBW四合一全彩LED灯珠
通道: 9通道或14通道
频闪: 1-25次/秒
水平扫描: 540°+微调
垂直扫描: 180°+微调
调光: 0-100%平滑线性调光
颜色: RGBW混色
控制: 自走、声控、主从、DMX512
包装尺寸: 270X222X253mm
包装尺寸: 490X290X535mm 4个装
净重: 2.8KG

N-Y021A/N-Y021

30W/10W LED MINI Patten Moving head Light
Technical Parameters:

Power supply: AC 100-240 V 50/60Hz
Power Consumption: 40W
Light Source: 30W/10W LED
Color: 7 colors + white color
Gobo: 7 design + white + rainbow effect
Focus: Manual focusing
Dimmer: 0-100% linear adjustment
Pan/Tilt: X axis 540°, Y axis 270°
Strobe: 0-20HZ
Control mode : DMX512
Automatic and Master/ slave mode
Channel : 9/11 CHS

LED MINI摇头图案灯 30W/10W
技术参数:
电源供应: AC100-240V/50-60Hz,
功率: 40W
光源: 30W/10W LED
颜色: 7种颜色+白光
图案盘: 7图案+白光+彩虹效果
调焦: 手动调焦
调光: 0-100%线性调节
投射光范围: 水平540°·垂直270°
频闪: 0-20HZ
控制模式: DMX512/自走/声控
通道数量: 9和11通道两种模式




Z-1512/Z-1512S/Z-1516/ Z-1516S/Z-3012/ Z-3012S/Z-3016/Z-3016S/Z-6016/Z-6016S

3 group intelligent light
三组合智能灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
LED source: 4pcs 3W led or 8pcs 1W led+20W
integrated white
Color: 4/6 Color
Laser diode: G80mw, R100mw, B200-1000mw
Wavelength: G532nm, R650nm, B450nm
Grating pattern: 12/16 in 1
Control mode : DMX-512, automatic, sound,
master & slave
Scene: dynamic, soft, lyric, sing, bright mode
Control channel: 10CHS
Net weight: 1.3KG
Box size: 275X165X188mm
Master carton size: 580X360X410mm 8pcs in 1
Installation: hang on to the wall or ceiling installation

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
LED光源: 4颗3W灯珠/6颗1W灯珠+20W集成白光
灯珠颜色: 4/6色
激光光源: G80mw R100mw B200-1000mw
激光波长: 绿532nm、红650nm、蓝450nm
光栅图案: 12、16合一
控制方式: DMX512、声控、自走、主从
场景模式: 动感、柔和、抒情、K歌、明亮
通道模式: 10CHS
净重: 1.3KG
包装尺寸: 275X165X188mm
包装尺寸: 580X360X410mm 8个装
安装方式: 外挂/吸顶



05

N-X017

7color 7 in 1 LED effect light
七色蝴蝶灯

Technical Parameters:
Power Supply: AC100V-AC240V · 50Hz/60Hz
Power consumption: 60w
LED source: 2pcs 20W 7 in 1 led
Color: Red and Green and Blue and white
and yellow and pink and purple
Control mode: DMX-512, automatic, sound
Control channel : 10CHs
Housing: plastic
Working environment: indoor (10-35°)
Net weight: 1.5KG
Box size : 275X245X180mm
Master carton size: 570X510X390mm 8pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
光源: 2颗20W 7合一灯珠
颜色: 红、绿、蓝、白、黄、粉红、紫
控制方式: DMX512、声控、自走
通道模式: 10CHS
外壳: 阻燃工程塑料外壳
净重: 1.5KG
包装尺寸: 275X245X180mm
包装尺寸: 570X510X390mm 8个装
工作环境: 室内 (10-35°)




N-X013A

Mini LED Butterfly
Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ
Power consumption: 30W
Light Source: 2 pcs 10W (cree RGBW 4in1) LED
Color : 4 color
Control mode : DMX-512, music control, automatic
Channel : 8 channels
Lens: 8*2 PCS
Operating Environment : indoor
Net weight: 1.8KG
Box size: 250X235X180mm
Master carton size: 525X495X395mm 6in1

迷你LED蝴蝶灯
技术参数:
额定电压: AC100-240V, 50Hz-60Hz
功率: 30W
光源: 2颗10W (科瑞RGBW四合一) 灯珠
颜色: 四色
控制方式: DMX-512、声控、自走
控制通道: 8通道
镜片: 8*2片
工作环境: 室内
净重: 1.8KG
包装尺寸: 250X235X180mm
包装尺寸: 525X495X395mm 8个装



N-X015/X015A

Mini LED Butterfly
Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ
Power consumption: 25W
Light Source: 2 pcs 10W(cree RGBW 4in1)
Color : 4 color
Control mode : DMX-512, music control, automatic
Channel : 8 channels
Lens: 8*2 PCS or 5*2pcs
Operating Environment : indoor
Net weight: 1.6KG
Box size: 250X235X180mm
Master carton size: 525X495X395mm 8in1

迷你LED蝴蝶灯
技术参数:
额定电压: AC100-240V, 50Hz-60Hz
功率: 25W
光源: 2颗10W (科瑞RGBW四合一) 灯珠
颜色: 四色
控制方式: DMX-512、声控、自走
控制通道: 8通道
镜片: 8*2片或5*2片
工作环境: 室内
净重: 1.6KG
包装尺寸: 250X235X180mm
包装尺寸: 525X495X395mm 8个装



N-X013

LED Butterfly
Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ
Power consumption: 40W
Light Source: 2 pcs 10W(cree RGBW 4in1)
Color : 4 color
Control mode : DMX-512, music control, automatic
Channel : 8 channels
Operating Environment : indoor

LED蝴蝶灯
技术参数:
额定电压: AC100-240V, 50Hz-60Hz
功率: 40W
光源: 2颗10W (科瑞RGBW四合一) 灯珠
颜色: 四色
控制方式: DMX-512、声控、自走
控制通道: 8通道
工作环境: 室内



06



N-X018

LED 7 colors spotlight
Technical Parameters:
Power Supply: AC100~240V, 50HZ~60HZ
Power consumption: 15W
Light source: 1 pc 10W(RGBW 4 in 1) LED
Color: 7 colors
Control mode: DMX-512, music control, automatic.
Channel: 6 channels
Operating Environment: indoor
Box size: 210X182X135mm
Master carton size: 425X375X560mm
20pcs in 1

LED七彩射灯
技术参数:
额定电压: AC100~240V, 50HZ~60HZ
功率: 15W
光源: 1颗10W (RGBW 4 in 1) LED
颜色: 七彩
控制方式: DMX512, 自走, 声控
控制通道: 6通道
工作环境: 室内
包装尺寸: 210X182X135mm
包装尺寸: 425X375X560mm 20个装



N-X019

LED white spotlight
Technical Parameters:
Power Supply: AC110V/AC230V, 50HZ~60HZ
Power consumption: 10W
Light source: 1 pc 3W/5W(CREE) LED
Color: White
Control mode: automatic
Operating Environment: indoor
Box size: 153X83X93mm
Master carton size: 420X225X470mm
50pcs in 1

LED白色射灯
技术参数:
额定电压: AC110V/AC230V, 50HZ~60HZ
功率: 10W
光源: 1颗3W/5W (科瑞) LED
颜色: 白色
控制方式: 自走
工作环境: 室内
包装尺寸: 153X83X93mm
包装尺寸: 420X225X470mm 50个装



N-X025/N-X025A

30W/50W high definition LOGO light
30W/50W高清LOGO灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
LED source: 30W/50W white
LOGO wheel size: 47mm
LOGO color: customized
Pattern control: 360° rotation or static
Focus: manual focus
Working environment: indoor (10-35°)
Net weight: 1.8KG

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
光源: 30W/50W白光
LOGO片尺寸: 47mm
LOGO颜色: 定制
图案控制: 360°旋转或静止
调焦方式: 手动调焦
净重: 1.8KG
工作环境: 室内 (10-35°)



N-X021

10W LOGO light
10W LOGO灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 15W
LED source: 10W white
LOGO wheel size: 21.5mm
LOGO color: static
Focus: manual focus
Working environment: indoor (10-35°)
Net weight: 0.8KG

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 15W
光源: 10W白光
LOGO片尺寸: 21.5mm
LOGO颜色: 定制
图案控制: 静止
调焦方式: 手动调焦
净重: 0.8KG
工作环境: 室内 (10-35°)




L005/L006

LED Crystal ball light
水晶蜗牛

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 20W
LED source: 4*3 LED, OR 6*1W LED
Color: 4color Red, Green, Blue, White
OR 6color Red, Green, Blue, White, Yellow, Pink

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 20W
LED光源: 4颗3W灯珠或6颗1W灯珠
灯珠颜色: 4色红、绿、蓝、白或6色红、绿、蓝、白、黄、粉红



Control mode: Automatic, sound
Net weight: 0.5KG
Working environment: indoor (10-35°)
Installation: Ceiling installation
Box size: 147X147X138mm
Master carton size: 460X460X660mm
36pcs in 1

控制方式: 声控、自走
净重: 0.5KG
安装方式: 吸顶
工作环境: 室内 (10-35°)
包装尺寸: 147X147X138mm
包装尺寸: 460X460X660mm 36个装

L007/L008/L009/L010

LED Snail strobe
频闪蜗牛


Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 25W
LED source: 20W
Color: W/B/R/G

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 25W
LED光源: 20W集成光源
灯珠颜色: 白/蓝/红/绿




Control mode: Automatic, sound
Working environment: indoor (10-35°)
Net weight: 0.5kg
Box size: 147X147X138mm
Master carton size: 460X460X580mm
36pcs in 1

控制方式: 声控、自走
净重: 0.5KG
安装方式: 吸顶
工作环境: 室内 (10-35°)
包装尺寸: 147X147X138mm
包装尺寸: 460X460X580mm 36个装



Installation: Ceiling installation



L001/L002/L003/L004


Red and Green snail laser light
红绿激光蜗牛

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 20w
Laser power: R80-150mw/650nm,
G30-80mw/532nm
Laser color: Red and Green
Laser pattern: 12/16/20/40pcs (optional)
Housing: plastic
Control mode: Automatic, sound
Working environment: indoor (10-35°)
Installation: Ceiling installation
Box size: 147X147X138mm
Master carton size: 460X460X580mm
36pcs in 1
Net weight: 0.5KG

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 20W
激光功率: 650nm红光80-150mw
532nm绿光30-80mw
激光颜色: 红色、绿色
激光图案: 12/16/20/40个(可选)
外壳: 阻燃工程塑料外壳
控制方式: 自走、声控
工作环境: 室内(10-35°)
安装方式: 吸顶
包装尺寸: 147X147X138mm
包装尺寸: 460X460X580mm 36个装
重量: 0.5KG

L001B/L002B/L003B/L004B

Red and Blue snail laser light
红蓝激光蜗牛



Technical Parameters:
Power Supply: AC100V-AC240V,
50Hz/60Hz
Power consumption: 20w
Laser power: R80-150mw/650nm,
B200-1000mw/450nm
Laser pattern: 12/16/20/40pcs (optional)
Control mode: Automatic, sound
Working environment: indoor (10-35°)
Installation: Ceiling installation
Box size: 147X147X138mm
Master carton size: 460X460X580mm
36pcs in 1
Net weight: 0.5KG

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 20W
激光功率: 650nm红光80-150mw
450nm蓝光200-1000mw
激光颜色: 红色、蓝色
激光图案: 12/16/20/40个(可选)
控制方式: 自走、声控
工作环境: 室内(10-35°)
安装方式: 吸顶
包装尺寸: 147X147X138mm
包装尺寸: 460X460X580mm 36个装
重量: 0.5KG

N-B200/N-B230

200W/230W Moving head Beam Light
200W/230W摇头光束灯

Technical Parameters:
power supply: AC 100-240 V 50/60Hz
Lamp: 200W/230W
Average Lifespan: 2000H
Color: 14 color + blank color wheel
Gobo: 17 fixed gobo + blank gobo
Prism: rotation 8-face prism, Bilateral rotation
Lens: high precision optical lens
Focus: linear adjustment
Dimmer: 0-100% linear adjustment
Pan/Tilt: X axis 540° Y axis 270°,
16 bit precision scan
Beam angle: parallel beam angle 0-3.8°
Strobe: Double lens strobe (0.5-9 times/second)
Control mode: Standard DMX512, Automatic
and Master/ slave mode
Channel: 16 /20 CHS

技术参数:
电源供应: AC100V~240V/50~60Hz,
功率: 200W/230W
光源: 200W/230W
光通寿命: 2000小时
颜色: 14个色点 带有14种颜色+空白
图案: 17个图案盘带有17个固定图案
+空白
棱镜: 旋转八面棱镜,可双向旋转
镜头: 高精度复合光学镜头
调焦: 线性调焦
调光: 0-100%线性调光
投射光范围: 水平540°, 解析度16Bit,
垂直270°, 解析度16Bit
光束角度: 平行光束角: 0-3.8°
频闪: 双片式频闪(0.5-9次/秒)
控制模式: DMX512/自走/声控
通道数量: 16通道/20通道两种通道模式




N-Y028B

60W LED PATTERN MOVING HEAD LIGHTS
60W LED摇头图案灯

Technical Parameters:
Power Supply: AC100V-AC240V,
50Hz/60Hz
Power consumption: 90w
LED source: 60W LED
Color: 11 color + white + rainbow effect
Pattern: 10 pattern + white + rainbow effect
Prism: 3pcs of prism/8pcs of prism
Focus: linear focus
Dimmer: 0-100% linear adjustment
Strobe speed: 1-25times/second
Control channel: 11/14CHS
Pan/Tilt: X axis 540°, Y axis 270°
Control mode: DMX-512, automatic,
master & slave, sound
Working environment: indoor (10-35°)
Net weight: 5.3KG
Box size: 365X295X295mm
Master carton size: 925X380X310mm
3pcs in 1
Installation: hang on to the wall or
ceiling installation

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 90W
光源: 60W LED
颜色: 11种颜色+白光+彩虹效果
图案: 10种图案+白光+彩虹效果
棱镜: 3棱镜、8棱镜可选
调焦: 线性调焦
调光: 0-100%线性调光
频闪速度: 1-25次/秒
通道模式: 11CHS、14CHS
X轴角度: 水平540度
Y轴角度: 垂直270度
控制方式: DMX512、声控、自走、主从
工作环境: 室内(10-35°)
净重: 5.3KG
包装尺寸: 365X295X295mm
包装尺寸: 925X380X310mm 3个装
安装方式: 外挂



Product feature: This product is with delicate outlook, easy installation, ultra-high brightness, clear pattern, vivid color, biprisms optical path is taken, and plenty of patterns with strong beam. It is also a very good product with best price, and which can be used in KTV, bar, party etc.



N-Y002

36pcs 10W LED Zoom Moving head Light
36颗10W全彩4合1 LED调焦摇头灯

Technical Parameters: 技术参数:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 400W
Light Source: 36 pcs 10W RGBW 4 in 1 LED
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Channel: 16/12 channels
Lamp life: 50,000hours lifetime
Pan: 630degree
Tilt: 270 degree
Zoom: 15-60
Outer cover material: Aluminum body
电源供应: AC90-240V, 50Hz-60Hz
功率: 400W
光源: 36颗10W 全彩4合1 灯珠
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 16/12通道
水平扫描: 630度
垂直扫描: 270度
调焦角度: 15-60度



N-Y001

108 pcs LED Moving Head Light
108颗LED摇头灯

Technical Parameters: 技术参数:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 400W
Light Source: High power 3W LED, 108 pcs of leds: 30Red, 30 Green, 30 Blue, 18 White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGBW
Control mode: DMX-512, music control, automatic, master & slave
Channel: 16/12 channels
Level Scanning: 630° (16 bit precision scan)
Vertical Scan: 270° (16 bit precision scan)
电源供应: AC90-240V, 50Hz-60Hz
功率: 400W
光源: 108颗3W高功率LED (红色30颗、绿色30颗、蓝色30颗、白色18颗)
发光角度: 15°、25°、45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 16/12通道
水平扫描: 630度
垂直扫描: 270度



N-Y026/N-Y026B

Spider Beam RGBW (White) LED Moving Light
全彩/白光LED 摇头蜘蛛灯

Technical Parameters:
Power supply: AC100-240V, 50/60Hz
Power Consumption: 110w
Light Source: 8 pcs 10W (cree RGBW 4 in 1 or white) LED
Channel: 11 or 37 channels/White 7 or 13 channels
Stroboscopic: 1-25 times per second
Level Scanning: 540° (16 bit precision scan)
Vertical Scan: 185° (16 bit precision scan)
Smooth linear dimming: 0-100% dimmer
color: RGBW 7 color or White
Control mode: DMX-512, music control, automatic, master & slave

技术参数:

输入电压: AC100-240V, 50Hz-60Hz
最大功率: 110W
光源: 8颗10W科瑞 四合一全彩/白光LED灯珠
通道: 11通道或37通道/白色7通道或13通道
频闪: 1-25次/秒
水平扫描: 540° ±微调
垂直扫描: 185° ±微调
调光: 0-100%平滑线性调光
颜色: 七彩色或白色
控制: 自走、声控、主从、DMX512
功能: 本产品光束效果很好, 每个灯珠可单独控制, 具有光束跑马、跳跃、频闪、旋转等多种效果, 投射范围极大。




FY-666/ FY-632

Spider Laser Beam RGB (Single Green) Moving Light
RGB/单绿 激光摇头蜘蛛灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 120w
Laser diode: R300mw*2/G80mw*4/B500mw*2
Color: RGB or Green
Beam effect: jumping, rainbow effect, exchange, strobe
Control mode: DMX-512, automatic, master & slave, sound
Control channel: 13CHS/16CHS/20CHS
Pan/Tilt: X axis 540°, Y axis 180°
Net weight: 8.5KG
Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 120W
光源: 红光300mw*2/绿光80mw*4/蓝光500mw*2
激光波长: 绿光: 532nm 红光: 638nm, 蓝光: 450nm
颜色: 红绿蓝或绿色
控制方式: DMX-512, 声控, 自走, 主从
光束效果: 跑马, 彩虹流水, 交替, 频闪
通道模式: 13CHS/16CHS/20CHS
X轴角度: 水平540度
Y轴角度: 垂直180度
净重: 8.5KG
工作环境: 室内 (10-35°)



N-Y005/Y007/Y008

8Eyes laser moving head light
8眼摇头激光灯

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 120w
Laser diode: R100-500mw/638nm G50-100mw/532nm, B100-100mw/450nm
Color: RGB, Green or Blue
Beam effect: jumping, rainbow effect, exchange, strobe
Control mode: DMX-512, automatic, master & slave, sound
Control channel: 6/14CHS
Y axis angle: Tilt 180°
Working environment: indoor (10-35°)
Net weight: 7.5KG
Box size: 1150X160X250mm
Master carton size: 1165X3450X525mm 4pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 120W
光源: 红光100-500mw/绿光50-100mw/蓝光100-100mw
激光波长: 绿光: 532nm 红光: 638nm, 蓝光: 450nm
控制方式: DMX-512, 声控, 自走, 主从
光束效果: 跑马, 彩虹流水, 交替, 频闪
通道模式: 6CHS, 14CHS
Y轴角度: 垂直180度
包装尺寸: 1150X160X250mm
包装尺寸: 1165X3450X525mm 4个装
净重: 7.5KG
工作环境: 室内 (10-35°)





F5000-908/910/915/920/930

RGB Animation laser 8W~30W
Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 350W max
Laser Power: RGB 8W~30W
Wavelength: Green:532nm or 520nm/Red:635nm or 640nm/Blue: 450nm or 457nm
Laser Modulation: analog modulation
Laser Color: RGB full colors
Scan System: high speed scanner 30-60kpps,
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor

全彩动画激光灯8W~30W
技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: <350W
激光功率: 8W~30W
激光波长: 绿光: 532nm或520nm, 红光: 635nm或640nm, 蓝光: 450nm或457nm
调制信号: 模拟调制
激光颜色: 全彩色
扫描系统: 30-60kpps高速扫描系统,
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)



F2000-901/9015/902/903/904/905/906/908

RGB Animation laser 1W~8W
Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W max
Laser Power: RGB 1W~8W
Wavelength: Green 532nm or 520nm, Red 655nm/635nm/638nm/640nm, Blue 450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB
Scan System: high speed scanner 30-60kpps,
Control Mode: ILDA, DMX-512, music control, auto-matic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor

全彩动画激光灯1W~8W
技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: <200W
激光功率: 1W~8W
激光波长: 绿光: 532nm或520nm, 红光: 655nm或635nm或638nm或640nm, 蓝光: 450nm
激光调制信号: 模拟调制或TTL调制
激光颜色: 全彩
扫描系统: 30-60kpps高速扫描系统,
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)



F4-901/902/903/904/905

RGB Animation laser 1W~5W
Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 100W max
Laser Power: RGB 1W~5W
Wavelength: Green 532nm or 520nm, Red 650nm/635nm or 638nm, Blue 450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB
Scan System: 15-30kpps vibratory mirror system,
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 530*390*280mm
Gross Weight: 16KG max

全彩动画激光灯1W~5W
技术参数:


电源供应: AC90~240V, 50Hz~60Hz
额定功率: <100W
激光功率: 1W~5W
激光波长: 绿光: 532nm或520nm, 红光: 650nm/635nm或638nm, 蓝光: 450nm
激光调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 15-30kpps振镜扫描,
激光图案: 128组激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
纸箱包装尺寸: 530*390*280mm
毛重: <16KG

F7901/F7902/F7903/F7904/F7905

RGB phone APP control laser light
全彩手机APP激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: <100W
Laser diode: 1W-5W RGB
Wavelength: G532nm/520nm, R650nm/638nm, B450nm
Laser modulation: analog or TTL modulation
Color: RGB
Scan system: 15-40Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: ILDA, DMX-512, automatic, master & slave, sound, master & slave, APP control, SD card control (optional)
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 7.5KG
Box size: 400X360X315mm
Master carton size: 740X420X655mm 4pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: <100W
激光功率: 1W-5W
激光波长: 绿光: 532nm或520nm 红光: 650nm或638nm 蓝光: 450nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 15-40kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组255个, 共3800个图案
控制方式: ILDA, DMX-512, 声控、自走、主从、APP控制、SD卡控制(定制)
冷却系统: 风机强制冷却
通信模式: 34CHS
工作环境: 室内(10-35°)
净重: 7.5KG
包装尺寸: 400X360X315mm
包装尺寸: 740X420X655mm 4个装



F6705/F6708/F6710/F6720/F6730

RGB phone APP control laser
全彩手机APP激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 80W
Laser diode: 500mw-3000mw RGB
Wavelength: G532nm/520nm, R650nm/638nm, B450nm
Laser modulation: analog or TTL modulation
Color: RGB
Scan system: 15-30Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: ILDA, DMX-512, automatic, master & slave, sound, master & slave, APP control
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 4.5KG
Box size: 330X360X315mm
Master carton size: 680X380X655mm 4pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 80W
激光功率: 500mw-3000mw
激光波长: 绿光: 532nm或520nm 红光: 650nm或638nm 蓝光: 450nm
调制信号: 模拟调制或TTL调制
激光颜色: 全彩色
扫描系统: 15-30kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组255个, 共3800个图案
控制方式: ILDA, DMX-512, 声控、自走、主从、APP控制
冷却系统: 风机强制冷却
通信模式: 34CHS
工作环境: 室内(10-35°)
净重: 4.5KG
包装尺寸: 330X360X315mm
包装尺寸: 680X380X655mm 4个装



全彩动画激光系列
RGB Animation Laser Series



NF810/NF820/NF830

RGB Animation laser 1W-3W
Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 100W max
Laser Power: RGB 1W-3W
Wavelength: Green 532nm or 520nm, Red 650nm/638nm, Blue 450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB
Scan System: 30kpps vibratory mirror system,
Control Mode: ILDA, DMX-512, music control, automatic, master & slave
Control Channel: 12
Cool System: fan
Operating Environment: 10-35°indoor
Flightcase Size: 415*335*340mm
Gross Weight: 15KG max

全彩动画激光灯 1W-3W
技术参数:

电源供应: AC90-240V, 50Hz~60Hz
额定功率: <100W
激光功率: RGB 1W-3W
激光波长: 绿光: 532nm或520nm, 蓝光: 450nm, 红光: 650nm或638nm
激光调制信号: 模拟调制或TTL调制
激光颜色: 全彩
扫描系统: 30kpps振镜扫描,
控制方式: ILDA, DMX-512, 声控、自走、主从
控制通道: 12
冷却系统: 风机强制冷却系统
工作环境: 室内(10-35°)
航空箱包装尺寸: 415*335*340mm
毛重: <15KG

F2723/F2750/F2780

RGB full color phone APP control laser
F2全彩手机APP激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 230mw-800mw
Wavelength: G532nm/520nm, R650nm/638nm, B450nm
Laser modulation: TTL modulation
Color: RGB
Scan system: 15-20Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 230mw-800mw
激光波长: 绿光: 532nm或520nm, 红光: 650nm或638nm, 蓝光: 450nm
调制信号: TTL调制
激光颜色: 全彩色
扫描系统: 15-20kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组255个, 共3800个图案
控制方式: DMX-512, 声控、自走、主从、APP控制
冷却系统: 风机强制冷却
工作环境: 室内(10-35°)
逃逸模式: 34CHS
净重: 1.8KG
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装



F2355/F2380/F2318/F2340

RGY three color phone APP control laser
F2三色手机APP激光

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 200mw-1300mw
Wavelength: G532nm/520nm, R650nm/638nm
Laser modulation: TTL modulation
Color: RGY
Scan system: 15-20Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 200mw-1300mw
激光波长: 绿光: 532nm或520nm, 红光: 650nm或638nm
调制信号: TTL调制
激光颜色: RGY
扫描系统: 15-20kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组255个, 共3800个图案
控制方式: DMX-512, 声控、自走、主从、APP控制
冷却系统: 风机强制冷却
逃逸模式: 34CHS
工作环境: 室内(10-35°)
净重: 1.8KG
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装



单色动画激光系列
Single color animation laser series



F5000-681/682/685/690/695/698/699

Green Animation Laser 1W-30W
Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 1000W max
Laser Power: 1W-30W
Laser Source: solid semiconductor laser generator
Wavelength: Green: 532nm or 520nm
Laser Modulation: analogue modulation or 0-20K TTL modulation
Scan System: 20KPPS scanning(Large lens)or 40kpps high speed scanner
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10-35°indoor

单绿激光灯1W-30W
技术参数:

电源供应: AC90-240V, 50Hz~60Hz
额定功率: <1000W
激光功率: 1W-30W
激光光源: 半导体激光发生器
激光波长: 绿光: 532nm或520nm
激光调制信号: 模拟调制或TTL调制0~20K
扫描系统: 20K大镜片振镜片或者40kpps高速振镜扫描系统,
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
冷却系统: 风机强制冷却系统
工作环境: 室内(10-35°)


F4675/F4681/F4682/F4683/F4685

Green Animation Laser 500mw-5W
Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 200W max
Laser Power: 500mw-5W
Wavelength: 532nm or 520nm
Laser Color: Green
Scan System: 15-40kpps vibratory mirror system,
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Control Channel: 12 or 25
Cool System: fan
Operating Environment: 10-35°indoor
Packing Size: 530*390*280mm
Gross Weight: <13KG

单绿动画激光500mw-5W
技术参数:

电源供应: AC90-240V, 50Hz~60Hz
额定功率: <200W
激光功率: 500mw-5W
激光波长: 绿光: 532nm或520nm
激光颜色: 翠绿色
扫描系统: 15-40kpps振镜扫描,
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
控制通道: 12或 25个
冷却系统: 风机强制冷却系统
工作环境: 室内(10-35°)
包装尺寸: 530*390*280mm
毛重: <13KG



NF653/NF655/NF660/NF662/NF665

Green Animation Laser 300mw-5W
Technical Parameters:

Power Supply: AC90-240V, 50HZ-60HZ
Power Consumption: 200W max
Laser Power: 300mw-5W
Laser Color: Green(532nm) or 520nm
Scan System: 30kpps vibratory mirror system,
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave
Control Channel: 10 or 23
Operating Environment: 10-35°indoor
Flight case Size: 415*335*340mm
Gross Weight: 16KG max

单绿动画激光300mw-5W
技术参数:

电源供应: AC90-240V, 50Hz~60Hz
额定功率: <200W
激光功率: 300mw-5W
激光颜色: 翠绿色(532nm)/520nm
扫描系统: 30kpps振镜扫描
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从
控制通道: 10或 23个
工作环境: 室内(10-35°)
航空箱尺寸: 415*335*340mm
毛重: <16KG



F7675/F7681/F7682/F7683/F7685

Green phone APP control laser light
单绿手机APP激光

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 100W

Laser diode: 500mw-5000mw

Wavelength: G532nm/520nm

Laser modulation: Analog or TTL modulation

Color: Green

Scan system: 15-30Kpps

Scan angle: ±25°

Laser pattern: 15groups storage, more than 3800 patterns

Control mode: ILDA, DMX-512, automatic, master & slave, sound, master & slave, APP control

Control channel: 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 5.5KG

Box size: 400X360X315mm

Master carton size: 740X420X655mm 4pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 100W

激光功率: 500mw-5W

激光波长: 绿光: 532nm或520nm

调制信号: 模拟调制或TTL调制

激光颜色: 单绿色

扫描系统: 15-30kpps透镜

扫描角度: ±25°

激光图案: 15组图案库, 每组255个, 共3800个图案

控制方式: ILDA, DMX-512, 声控, 自走, 主从, APP控制

冷却系统: 风机强制冷却

通道模式: 34CHS

工作环境: 室内 (10-35°)

净重: 5.5KG

包装尺寸: 400X360X315mm

包装尺寸: 740X420X655mm 4个装



F6650/F6651/F6652/F6653

Green phone APP control laser light
单绿手机APP激光

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 80W

Laser diode: 500mw-3000mw

Wavelength: G532nm/520nm

Laser modulation: Analog or TTL modulation

Color: Green

Scan system: 15-20Kpps

Scan angle: ±25°

Laser pattern: 15groups storage, more than 3800 patterns

Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control

Control channel: 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 4.5KG

Box size: 330X360X315mm

Master carton size: 680X380X655mm 4pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 80W

激光功率: 500mw-3000mw

激光波长: 绿光: 532nm或520nm

调制信号: 模拟调制或TTL调制

激光颜色: 单绿色

扫描系统: 15-20kpps透镜

扫描角度: ±25°

激光图案: 15组图案库, 每组255个, 共3800个图案

控制方式: DMX-512, 声控, 自走, 主从, APP控制

冷却系统: 风机强制冷却

通道模式: 34CHS

工作环境: 室内 (10-35°)

净重: 4.5KG

包装尺寸: 330X360X315mm

包装尺寸: 680X380X655mm 4个装



F2606/F2610/F2615/F2650/F2660

Green phone APP control laser light
单绿手机APP激光

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 60W

Laser diode: 60mw/100mw/150mw/500mw/1w

Wavelength: G532nm/520nm

Laser modulation: TTL modulation

Color: Green

Scan system: 15-20Kpps

Scan angle: ±25°

Laser pattern: 15groups storage, more than 3800 patterns

Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control

Control channel: 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 275X210X185mm

Master carton size: 575X440X395mm 8pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 60W

激光功率: 60mw/100mw/150mw/500mw/1w

激光波长: 绿光: 532nm或520nm

调制信号: TTL调制

激光颜色: 单绿色

扫描系统: 15-20kpps透镜

扫描角度: ±25°

激光图案: 15组图案库, 每组255个, 共3800个图案

控制方式: DMX-512, 声控, 自走, 主从, APP控制

冷却系统: 风机强制冷却

通道模式: 34CHS

工作环境: 室内 (10-35°)

净重: 1.8KG

包装尺寸: 275X210X185mm

包装尺寸: 575X440X395mm 8个装



F2305/F2308/F23010/F2320/F2330/F2350

Blue phone APP control laser light
单蓝手机APP激光

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 60W

Laser diode: 500mw-5000mw

Wavelength: 450nm

Laser modulation: TTL modulation

Color: Blue

Scan system: 15-20Kpps

Scan angle: ±25°

Laser pattern: 15groups storage, more than 3800 patterns

Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control

Control channel: 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 275X210X185mm

Master carton size: 575X440X395mm 8pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 60W

激光功率: 500mw-5000mw

激光波长: 蓝光450nm

调制信号: TTL调制

激光颜色: 单蓝色

扫描系统: 15-20kpps透镜

扫描角度: ±25°

激光图案: 15组图案库, 每组255个, 共3800个图案

控制方式: DMX-512, 声控, 自走, 主从, APP控制

冷却系统: 风机强制冷却


通道模式: 34CHS

工作环境: 室内 (10-35°)

净重: 1.8KG

包装尺寸: 275X210X185mm

包装尺寸: 575X440X395mm 8个装





F1666/F1667

6D grating effect laser light
六维动画光栅

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/80mw, R150mw/650nm, B300mw/450nm
Color: RGB or RG
Scan system: 15Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 10,000 patterns including 3D, Grating effects
Control mode: DMX-512, automatic, master & slave, sound, master & slave, remote control
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 345X290X165mm
Master carton size: 905X370X315mm 5pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光80mw, 650nm红光150mw, 450nm蓝光300mw
激光颜色: 红绿蓝或红绿
扫描系统: 15kpps振镜
激光图案: 15组图案库, 每组255个, 共3800个图案, 包含3D, 光栅等5组共过万种效果
控制方式: DMX-512, 声控, 自走, 主从, 遥控
冷却系统: 风机强制冷却
通讯模式: 34CHS
净重: 1.8KG
包装尺寸: 345X290X165mm
包装尺寸: 905X370X315mm 5个装
工作环境: 室内 (10-35°)



F1645/F1645A/F1645B

RGB/RG/RB 5D Twin Effects
RGB/RG/RB 五维莲花台

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/60-150mw, 650/638/R100-300mw/650nm, 450nm/200-1000mw
Color: RGB or RG or RB
Scan system: 15Kpps
Scan angle: ±25°
Laser pattern: 128PCS including 3D, grating and other 5 group effect
Control mode: DMX-512, automatic, master & slave, sound, master & slave, remote control
Control channel: 23CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 345X290X165mm
Master carton size: 905X370X315mm 5pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光60-150mw, 650/638nm红光100-300mw, 450nm蓝光200-1000mw
激光颜色: 红绿蓝或红绿/红蓝
扫描系统: 15kpps振镜
激光图案: 128个 包含3D, 光栅等5组效果
控制方式: DMX-512, 声控, 自走, 主从, 遥控
冷却系统: 风机强制冷却
通讯模式: 23CHS
净重: 1.8KG
包装尺寸: 345X290X165mm
包装尺寸: 905X370X315mm 5个装
工作环境: 室内 (10-35°)



F1643A / F1643

RGB 5D Twin Effects RGB
RGB 五维莲花台

Technical Parameters:
Power Supply: AC90-240V, 50Hz-60Hz
Power Consumption: 30W
Laser Power: Green(532nm)80mw / Red(650nm)150mw / Blue200-300mw(450nm)
Laser Color: RGB seven color
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs, including 3D, grating and other 5 group effect
Control Mode: DMX-512, music control, automatic, master & slave, Wireless remote(Optional)
Control Channel: 23
Operating Environment: 10-35°indoor

RGB 五维莲花台
技术参数:

电源供应: AC90-240V, 50Hz~60Hz
额定功率: 30W
激光功率: 532nm绿光80mw, 650nm红光150mw, 450nm蓝光200-300mw
激光颜色: RGB七彩
扫描系统: 15kpps振镜扫描
激光图案: 128幅, 包括3D, 光栅等6组效果
控制方式: DMX-512, 声控, 自走, 主从, 遥控(可选)
控制通道: 23
工作环境: 室内(10-35°)




F1508 / F1508A

RGB rotating Twin Effects RGB
RGB旋转流花台

Technical Parameters:
Power Supply: AC90-240V, 50Hz-60Hz
Power Consumption: 30W
Laser Power: Green(532nm) 60mw / Red (650nm) 150mw / Blue200-300mw(450nm)
Laser Color: red & green & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave, Wireless remote(Optional)
Control Channel: 23
Operating Environment: 10-35°indoor

技术参数:
电源供应: AC90-240V, 50Hz-60Hz
额定功率: 30W
激光功率: 532nm绿光60mw, 650nm红光150mw, 450nm蓝光200-300mw
激光颜色: 红色, 绿色, 蓝色
扫描系统: 15kpps振镜扫描
激光图案: 128幅,
控制方式: DMX-512, 声控, 自走, 主从, 遥控(可选)
控制通道: 23
工作环境: 室内(10-35°)




F2250/F2220

RGB/RB Twin effect laser light
RGB/RB 流花亭

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/80mw, R150mw/650nm, B200-1000mw/450nm
Color: RGB or RB
Scan system: 15Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: DMX-512, automatic, master & slave, sound, master & slave, remote control
Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 345X290X165mm
Master carton size: 905X370X315mm 5pcs in 1

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光80mw, 650nm红光150mw, 450nm蓝光200-1000mw
激光颜色: 红绿蓝或红蓝
扫描系统: 15kpps振镜
激光图案: 15组图案库, 每组255个, 共3800个图案
控制方式: DMX-512, 声控, 自走, 主从, 遥控
冷却系统: 风机强制冷却
通讯模式: 34CHS
净重: 1.8KG
包装尺寸: 345X290X165mm
包装尺寸: 905X370X315mm 5个装
工作环境: 室内 (10-35°)



F1250

RGB Twin Effects
RGB 流花台

Technical Parameters:
Power Supply: AC90-240V, 50Hz-60Hz
Power Consumption: 30W
Laser Power: Green(532nm)60mw Red(650nm)150mw Blue200-300mw(450nm)
Laser Color: red & green & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs
Control Mode: DMX-512, music control, automatic, master & slave
Control Channel: 22
Operating Environment: 10-35°indoor
Inner Packing Size: 345x290x165mm
Gross Weight: 2.4KG
Packing Size: 910x370x320mm(5 pcs)
Total weight: 13.5KG

技术参数:
电源供应: AC90-240V, 50Hz-60Hz
额定功率: 30W
激光功率: 532nm绿光60mw 650nm红光150mw 450nm蓝光200-300mw
激光颜色: 红色, 绿色, 蓝色
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案
控制方式: DMX-512, 声控, 自走, 主从
控制通道: 22
工作环境: 室内(10-35°)
内包尺寸: 345x290x165mm
毛重: 2.4KG
外包装尺寸: 910x370x320mm(5支/箱)
总重量: 13.5KG

光栅效果激光系列
Grating Effects Laser Series



F1230/1210

**RB/RG Twin Effects
Technical Parameters:**

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 60mw
Red (650nm) 150mw
Blue (450nm) 200~300mw

Laser Color: red&Blue or green & red
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs

Control Mode: DMX-512, music control, automatic, master & slave

Control Channel: 22
Operating Environment: 10~35°indoor
Inner Packing Size: 345×290×165mm
Gross weight: 2.2KG
Packing Size: 910×370×320mm(5 pcs)
Gross weight: 12KG


**RB/RG 莲花台
技术参数:**

电源供应: AC90~240V, 50HZ~60HZ
额定功率: 20W
激光功率: 532nm绿光60mw
650nm红光150mw
450nm蓝光200~300mw

激光颜色: 红蓝或红绿
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案

控制方式: DMX-512、声控、自走、主从
控制通道: 22个

工作环境: 室内 (10~35°)
内包尺寸: 345×290×165mm
毛重: 2.2KG
外包尺寸: 910×370×320mm (5支/箱)
总重量: 12KG



F2210/F2211

**RG/RB Twin Effects
Technical Parameters:**

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 20W
Laser Power: Green (532nm) 80mw
Red (650nm) 100mw
Blue(450nm)200~300mw

Laser Color: red & green or red & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs

Control Mode: DMX-512, music control, automatic, master & slave

Control Channel: 22
Operating Environment: 10~35°indoor
Inner Packing Size: 260×290×185mm
Gross weight: 2.1KG
Packing Size: 905×300×260mm(5 pcs)
Total weight: 11KG


**RG/RB 流花台
技术参数:**

电源供应: AC90~240V, 50HZ~60HZ
额定功率: 20W
激光功率: 532nm绿光80mw
650nm红光100mw
450nm蓝光200~300mw

激光颜色: 红绿或红蓝
扫描系统: 15kpps振镜扫描
激光图案: 128幅激光效果图案

控制方式: DMX-512、声控、自走、主从
控制通道: 22个

工作环境: 室内 (10~35°)
内包尺寸: 260×290×185mm
毛重: 2.1KG
外包尺寸: 905×300×260mm (5支/箱)
总重量: 11KG



F1001/F1001A/F1001B

**RG/RB Cat eye
Technical Parameters:**

Power Supply: AC90~240V
Power Consumption: 20W
Laser Power: Green (532nm) 50mw
Red (650nm) 100mw
Blue(450nm)200~1000mw

Laser Color: green & red or red & blue
Scan System: 15kpps vibratory mirror system
Laser Patterns: 128pcs, There are 8 festival patterns, New Year's Day, Easter, Valentine's Day, Christmas Day, Wedding and Birthday.

Control Mode: music control, automatic Wireless remote(optional)

Operating Environment: 10~35°indoor


**红绿/红蓝节日猫
技术参数:**

电压供应: AC90~240V
额定功率: 20W
激光功率: 绿光50mw/532nm
红光100mw/650nm
蓝光 200~1000mw/450nm

激光颜色: 红色、绿色或红色和蓝色
扫描系统: 15kpps振镜扫描

激光图案: 128幅图案, 内置新年、元宵节、情人节、万圣节、圣诞节、婚礼、生日以及早日等八套节目

控制方式: 声控、自走、遥控(可选)
工作环境: 室内 (10~35°)



光栅效果激光系列
Grating Effects Laser Series



F2001/F2002/F2003

**Festival cat laser light
Technical Parameters:**

Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/60mw, R150mw/650nm, B300mw/450nm

Color: RG or RB or RGB
Scan system: 15Kpps Laser pattern: 15groups storage, more than 3800 patterns

Control mode: DMX-512, automatic, master & slave, sound, master & slave, remote control

Control channel: 34CHs
Cooling system: fans
Working environment: indoor (10~35°)
Net weight: 1.8KG
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1



**节日灯
技术参数:**

工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光60mw、650nm红光150mw、450nm蓝光300mw
激光颜色: 红绿/红蓝/红绿蓝

扫描系统: 15kpps振镜
激光图案: 15组图案库, 每组255个, 共3800个图案

控制方式: DMX-512、声控、自走、主从、遥控

冷却系统: 风机强制冷却
通道模式: 34CHS
净重: 1.8KG
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装
工作环境: 室内 (10~35°)

F1316/F1316B/F1312/F1312B


**RG/RB in 1/12 in 1 grating laser
Technical Parameters:**

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 20W

Laser Power: Red (650nm) 100~150mw
Green(532nm)50~80mw
Blue(450nm) 200~1000mw

Laser Color: red & green or red & blue
Laser Patterns: 16/12pcs

Control Mode: music control, automatic
Operating Environment: 10~35°indoor



**红绿/红蓝合一/12合一
技术参数:**

电源供应: AC110V/AC230V, 50HZ~60HZ
额定功率: 20W

激光功率: 650nm红光100~150mw,
532nm绿光50~80mw,
450nm 蓝色200~1000mw

激光颜色: 红色和绿色或红色和蓝色
激光图案: 16/12个

控制方式: 声控、自走
工作环境: 室内 (10~35°)

F099A/F099B/F099C/F099D/F099E/F099F/F099G

**MINI RG Firefly 2 in 1/4 in 1/8 in 1/12 in 1/20 in 1/ grating laser
Technical Parameters:**

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power Consumption: 10W
Laser Power: Red (650nm) 80~100mw,
Green(532nm) 15~30mw

Laser Color: red & green
Laser Patterns: 1pcs/2 pcs/4 pcs/6 pcs/8 pcs/
12 pcs/20 pcs

Control Mode: music control, automatic
Operating Environment: 10~35°indoor

**迷你萤火虫/2合一/4合一/8合一/12合一/20合一 迷你激光
技术参数:**

电源供应: AC110V/AC230V, 50HZ~60HZ
额定功率: 20W

激光功率: 650nm红光80~100mw, 532nm
绿光 15~30mw

激光颜色: 红色和绿色
激光图案: 1/2/4/6/8/12/20个

控制方式: 声控、自走
工作环境: 室内 (10~35°)



F203/F206

RG/RB laser Water Effect Light
红绿红蓝激光炫影灯

Technical Parameters:

Power Supply: AC110V /AC230V ,50HZ-60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100-150mw / Green (532nm)60-80mw/Blue(450nm)200-1000mw

Laser Color: red & green or red & blue
Control Mode: DMX512, music control, automatic
Operating Environment: 10-35°indoor

技术参数:

电源供应: AC110V /AC230V , 50Hz-60Hz
额定功率: 20W

激光功率: 650nm红光100-150mw, 532nm绿色60-80mw, 450nm蓝色200-1000mw
激光颜色: 红色和绿色或红色和蓝色
控制方式: DMX512、声控、自走
工作环境: 室内(10-35°)

F1208/F1208A

RB 8/12/16/20 in 1 grating laser
Technical Parameters:

Power Supply: AC110V /AC230V ,50HZ-60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100-150mw
Blue(450nm) 200-1000mw

Laser Color: red & blue
Laser Patterns: 12/8pcs
Control Mode: music control, automatic
Operating Environment: 10-35°indoor

红蓝12合一/8合一
技术参数:

电源供应: AC110V /AC230V , 50Hz~60Hz
额定功率: 20W
激光功率: 650nm红光100-150mw,
450nm蓝色200-1000mw

激光颜色: 红色和蓝色
激光图案: 12/8个
控制方式: 声控、自走
工作环境: 室内(10-35°)

F1209/F1209A

RG 12 in 1 / 8 in 1 grating laser
Technical Parameters:

Power Supply: AC110V /AC230V ,50HZ-60HZ
Power Consumption: 20W
Laser Power: Red (650nm) 100-150mw / Green (532nm)50mw

Laser Color: red & green
Laser Patterns: 12/8pcs
Control Mode: music control, automatic
Operating Environment: 10-35°indoor

红绿8/12/16/20合一
技术参数:

电源供应: AC110V /AC230V , 50Hz~60Hz
额定功率: 20W
激光功率: 650nm红光100-150mw, 532nm绿色50mw

激光颜色: 红色和绿色
激光图案: 12/8个
控制方式: 声控、自走
工作环境: 室内(10-35°)



F0536/F0538/F0453/F0455/F0459

Green /Blue Animation Motor Laser

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 30W max
Laser Power: G: 60mw/100mw, B: 200-1000mw
Laser Color: green(532nm) ,Blue(450nm)
Scan System: Micro-step motor scanner, big angle scanning

Control Mode: music control, automatic
Operating Environment: 10-35°indoor
Inner Packing Size: 260×215×100mm
Gross Weight: 1.45KG
Packing Size: 535×270×450mm (10pcs)
Total weight: 15.5KG

单绿/单蓝电机动画激光灯

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: <30W
激光功率: 绿60mw/100mw, 蓝200-1000mw
激光颜色: 绿色(532nm), 蓝色(450nm)
扫描系统: 高精度步进电机扫描系统, 大角度扫描

控制方式: 自走、声控
工作环境: 室内(10-35°)
内包尺寸: 260×215×100mm
毛重: 1.45KG
外包尺寸: 535×270×450mm(10支/箱)
总重量: 15.5KG


F0971/F0972

Green Rain Curtain

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 50W max
Laser Power: 60mw/100mw
Laser Color: green (532nm)
Scan System: Micro-step motor scanner, big angle scanning

Control Mode: DMX-512, music control, automatic
Control Channel: 8
Operating Environment: 10-35°indoor
Inner Packing Size: 360×290×185mm
Gross Weight: 2.25KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 12.5KG



单绿扫描激光雨

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: <50W
激光功率: 60mw、100mw
激光颜色: 翠绿(532nm)
扫描系统: 高精度步进电机扫描系统, 大角度扫描

控制方式: DMX-512、自走、声控
控制通道: 8个DMX-512信号通道
工作环境: 室内(10-35°)
内包尺寸: 360×290×185mm
毛重: 2.25KG
外包尺寸: 905×300×260mm (5个/箱)
总重量: 12.5KG


F0973/F0975/F0978/F0979

Blue/Red Rain Curtain

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ-60HZ
Power Consumption: 60W max
Laser Power: Blue (450nm) 300mw / 500mw/800mw, Red (638nm) 200mw
Laser Color: Blue or Red
Scan System: Micro-step motor scanner, big angle scanning

Control Mode: DMX-512, music control, automatic
Control Channel: 8
Operating Environment: 10-35°indoor
Inner Packing Size: 360×290×185mm
Gross Weight: 2.25KG
Packing Size: 905×300×260mm (5 pcs)
Total weight: 12.5KG



蓝色/红色扫描激光雨

技术参数:

电源供应: AC110V /AC230V, 50Hz-60Hz
额定功率: <60W
激光功率: 450nm蓝: 300mw/500nm/800mw, 638nm红: 200mw
激光颜色: 蓝色或红色
扫描系统: 高精度步进电机扫描系统, 大角度扫描

控制方式: DMX-512、自走、声控
控制通道: 8个DMX-512信号通道
工作环境: 室内(10-35°)
内包尺寸: 360×290×185mm
毛重: 2.25KG
外包尺寸: 905×300×260mm (5个/箱)
总重量: 12.5KG



F1088/F1086

Motor grating effect laser light

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/60mw, R150mw/650nm, B300mw/450nm
Color: RGB or RG
Scan system: 1.8" step motor scanning
Laser pattern: 25
Grating effect: stars group
Control mode: DMX-512, automatic, master & slave, sound
Control channel: 10CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 345X290X165mm
Master carton size: 905X370X315mm 5pcs in 1

单头电机扫描光栅
技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光60mw、650nm红光150mw、450nm蓝光300mw
激光颜色: 红绿蓝或红绿
扫描系统: 1.8"高精度步进电机扫描
激光图案: 25个
光栅效果: 满天星组合
控制方式: DMX-512、声控、自走
冷却系统: 风机强制冷却
通道模式: 10CHS
净重: 1.8KG
包装尺寸: 345X290X165mm
包装尺寸: 905X370X315mm 5个装
工作环境: 室内 (10-35°)




F1080/F1082

Motor 5D grating effect laser light

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/60mw, R150mw/650nm, B300mw/450nm
Color: RGB or RG
Scan system: 1.8" step motor scanning
Laser pattern: 150 patterns including the grating effect group
Control mode: DMX-512, automatic, master & slave, sound
Control channel: 10CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 345X290X165mm
Master carton size: 905X370X315mm 5pcs in 1

电机五维光栅
技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光60mw、650nm红光150mw、450nm蓝光300mw
激光颜色: 红绿蓝或红绿
扫描系统: 1.8"高精度步进电机扫描
激光图案: 150个包含光栅组合效果
控制方式: DMX-512、声控、自走
冷却系统: 风机强制冷却
通道模式: 10CHS
净重: 1.8KG
包装尺寸: 345X290X165mm
包装尺寸: 905X370X315mm 5个装
工作环境: 室内 (10-35°)




F1033/F1034

3Heads Motor grating effect laser light

Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 40W
Laser diode: G532nm/60-100mw, R100-300mw/650 or 638nm, B200-1000mw/450nm
Color: RGB or RG
Scan system: 1.8" step motor scanning
Laser pattern: 25
Grating effect: stars group
Control mode: DMX-512, automatic, master & slave, sound
Control channel: 10CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 4KG

三头电机扫描光栅
技术参数:
工作电压: AC100-240V 50/60Hz
功率: 40W
激光功率: 532nm绿光60-100mw、650或638nm红光100-300mw、450nm蓝光200-1000mw
激光颜色: 红绿蓝或红绿
扫描系统: 1.8"高精度步进电机扫描
激光图案: 25个
光栅效果: 满天星组合
控制方式: DMX-512、声控、自走
冷却系统: 风机强制冷却
通道模式: 10CHS
净重: 4KG
工作环境: 室内 (10-35°)




F1066

Red & Green Four Head Laser Light

Technical Parameters:
Power Supply: AC110V/AC230V, 50HZ-60HZ
Power Consumption: 30W
Laser Power: Green(532nm)60mw
Red(650nm) 100mw*2
Laser Color: green & red
Scan System: Micro-step motor scanner.
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10-35°indoor
Inner Packing Size: 700*250*180mm
Gross Weight: 4.7KG
Packing Size: 720*530*410mm (4 pcs)
Total weight: 20.5KG

红绿四头激光
技术参数:

电源供应: AC110V/AC230V, 50Hz-60Hz
额定功率: 30W
激光功率: 532nm绿60mw、650nm红100mw*2
激光颜色: 绿色、红色
扫描系统: 高精度步进电机扫描系统
控制方式: DMX-512、自走、声控
控制通道: 5个
工作环境: 室内(10-35°)
内包尺寸: 700*250*180mm
内包毛重: 4.7KG
外包尺寸: 720*530*410mm (4个/箱)
外包毛重: 20.5KG




F1066B/F1066C

5/4 Color Four Head Laser Light

Technical Parameters:
Laser Power: Green(532nm)60mw, Red(650nm) 150mw*1+100mw*2, Purple(405nm) 100mw, Green(532nm)60mw, Red(650nm) 100mw*2, Blue(450nm)200-300mw
Laser Color: green & red & purple & yellow & fuchsine green & red & Blue & yellow
Scan System: Micro-step motor scanner.
Control Mode: DMX-512, music control, automatic
Control Channel: 5
Operating Environment: 10-35°indoor
Inner Packing Size: 700*250*180mm
Gross Weight: 5.3KG
Packing Size: 720*530*410mm (4 pcs)
Total weight: 23.5KG

五彩/四色缤纷激光灯
技术参数:

激光功率: 532nm绿60mw、650nm红光150mw*1+100mw*2、405nm紫光100mw、532nm绿60mw、650nm红光100mw*2、2.450nm蓝光200-300mw
激光颜色: 绿色、红色、紫色、黄色、高红或绿色、红色、蓝色、黄色
扫描系统: 高精度步进电机扫描系统
控制方式: DMX-512、自走、声控
控制通道: 5个
工作环境: 室内(10-35°)
内包尺寸: 700*250*180mm
内包毛重: 5.3KG
外包尺寸: 720*530*410mm (4个/箱)
外包毛重: 23.5KG




F1022/F1022G/F1022B/F1022Y/F1022M/F1022D

Double Head Laser Light

Technical Parameters:
Power Consumption: 60W max
Laser Power: F1022: Green(532nm)40mw & Red(650nm) 100mw
F1022G: Green(532nm) 60mw
F1022B: Blue(450nm)500-1000mw
F1022Y: Green(532nm)60mw & Red(650nm) 150mw
F1022M: Blue(450nm)500mw & Red(650nm) 150mw
F1022D: Green(532nm)40mw & Blue(450nm)300mw
Laser Color: F1022: Green & Red, F1022G: Green
F1022B: Blue, F1022Y: Green & Red & Yellow, F1022M: Blue & Red & fuchsine
F1022D: Green & Blue
Inner Packing Size: 345*290*165mm
Gross Weight: 3.3KG
Packing Size: 910*370*320mm (5 pcs)
Total weight: 18.5KG

双头激光
技术参数:

额定功率: <60W
激光功率: F1022: 绿(532nm)40mw、红(650nm) 100mw、F1022G: 绿(532nm) 60mw、F1022B: 蓝(450nm)500-1000mw、F1022Y: 绿(532nm)60mw和 红(650nm) 150mw、F1022M: 蓝(450nm)500mw、红(650nm) 150mw、F1022D: 绿(532nm)40mw、蓝(450nm)300mw
激光颜色: F1022: 绿和红, F1022G: 绿、F1022B: 蓝, F1022Y: 绿、红、黄、F1022M: 蓝、红、品红、F1022D: 绿、蓝
内包尺寸: 345*290*165mm
内包毛重: 3.3KG
外包尺寸: 910*370*320mm、(5个/箱)
外包毛重: 18.5KG





F020-06/03/12

Green / Blue / Red Ceiling Laser Curtain
Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ-60HZ

Power Consumption: 10W max

Laser Power: G:80mw/B:300-1000mw/R:100-300mw

Laser Color: green (532nm), Blue (450nm),
R (638/650nm)

Control Mode: TTL modulation

Operating Environment: 10-35°indoor

单绿/单蓝/单红顶项激光雨帘
技术参数:

工作电压: AC100-240V 50/60Hz
功率: 10W

激光功率: 绿光80mw
红光100-300mw
蓝光300-1000mw

激光颜色: 绿色532nm, 蓝450nm,
红638/650nm

控制方式: TTL调制

工作环境: 室内 (10-35°)

F010-06/03/12

Green / Blue / Red Laser Curtain
Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ-60HZ

Power Consumption: 10W max

Laser Power: G:80mw/B:300-1000mw/R:100-300mw

Laser Color: green (532nm), Blue (450nm),
R (638/650nm)

Control Mode: TTL modulation

Operating Environment: 10-35°indoor

单绿/单蓝/单红激光雨帘
技术参数:

工作电压: AC100-240V 50/60Hz
功率: 10W

激光功率: 绿光80mw
红光100-300mw
蓝光300-1000mw

激光颜色: 绿色532nm, 蓝450nm,
红638/650nm

控制方式: TTL调制

工作环境: 室内 (10-35°)

F021

Laser curtain control box
Technical Parameters:

Power Supply: AC100-240V, 50HZ/60HZ

Power Consumption: 30W

Control loop: 16

Control mode: DMX-512, Auto, Sound

Control channel: 10CHS

DMX access way: RJ45/RL3Pin cannon

Net weight: 0.5KG

Control connect way: DB25OUT

Working environment: indoor (10-35°)

激光雨帘控制器
技术参数:

工作电压: AC100-240V 50/60Hz
功率: 30W

控制回路: 16路

控制方式: DMX-512, 声控、自走

冷却系统: 风机强制冷却

通道模式: 10CHS

DMX接入方式: RJ45/RL3Pin卡农

控制联接方式: DB25OUT

净重: 0.5KG

工作环境: 室内 (10-35°)



High power green laser landmark can be installed in the top buildings ,such as tourist attractions and other outdoor place ,is a laser application technology, computer image processing technology and speed scanner control of high-teach products .This products used high power green laser ,can deduce dynamic short line ,surface ,rotating and geometric patterns, also can play text editor.Laser patterns can scan 360-degree , can enjoy its unique laser effects in a far place ,wonderful effects ,robust ,shock, is the city landmark,the famous scenic , can become a shinning landmark in the city and the unique urban landscape,urban lighting project a symbol of high quality .

高功率绿激光地标可安装在城市高层大厦顶端, 旅游景点等户外场所, 是集激光应用技术、计算机图像处理技术和超高速振镜控制技术于一体的高科技产品。该产品使用高功率的绿激光, 可在空中演绎出各种动态的线、面、旋转体等几何图案, 也可演绎编辑的各种图形文字。纯粹绚丽的激光图案可360度全方位扫描, 方圆数公里均能观赏到其独特的激光夜景, 视觉效果强劲、震撼, 具有王者风范, 是都市标志性建筑、著名景区的点睛之“笔”, 能使该建筑物活景区成为城市中耀眼的地标及独特的城市夜景, 是城市化工程中高品位的象征,



HW-910/920/930/940

Laser Landmarks 10W-40W

Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ

Power Consumption: 1500W max

Laser Power: 10W-40W

Laser Color: Green(532nm)

Scan System: high speed scanner

≥20kpps vibratory

mirror system

Single line range:1KM-10KM

Range Scanning:1KM-5KM

Pan: 360 degree

Control Software: Pangolin or Phoneix

Cool System: fan

10W-40W风冷地标激光灯

技术参数:

电源供应: AC100-240V, 50HZ-60HZ

额定功率: <1500W

激光功率: 10W-40W

激光颜色: 翠绿色(532nm)

扫描系统: 高速振镜扫描≥20Kkpps, 具

有完善的过小、过压、过载、

过热等监控和保护功能

单线射程范围: 1KM-10KM

扫描距离: 1KM-5KM

旋转角度: 水平360度

控制软件: 美国Pangolin(穿山甲),

德国Phoenix(火凤凰)

冷却方式: 风冷

Laser man is the laser programming, creative dance, music to combine a new laser performers, along with the rhythm of the music, laser dancer seems to have been given life, form time to time with the shadow moving .The beam of light is the best, gorgeous and surprise. applicable for Disco, Clubs, KTV station, pub, bar where the special dancing effect required .

激光人是融合了激光编程、舞蹈创意、音乐制作三位一体的全新激光舞蹈表演形式, 伴随着动感的音乐节奏, 舞者就像光影界的魔术师, 激光仿佛被赋予了生命的灵性 时而光随影动, 时而人舞交融。每一束光线都是最好的道具, 或绚烂或惊奇。

激光人表演系统一般由激光器、控制软件及表演程序、激光扫描组件、舞台、激光笔等组成。适用于Disco,演艺吧、夜总会、电视台、歌剧院等要求较高的场所使用。



F5000-820/830/850/950

Laser Man

Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ

Power Consumption: 200W max

Laser Power: Green2W/3W/5Wor RGB 5W

Laser Color: Green(532nm)or RGB

Scan System: high speed scanner 40kpps

vibratory mirror system

Control Mode: ILDA

Control Software: Pangolin or Phoneix

Operating Environment: 10-35°indoor

激光人

技术参数:

电源供应: AC100-240V, 50HZ-60HZ

额定功率: <200W

激光功率: 绿2W/3W/5W或RGB 5W

激光颜色: 翠绿色(532nm)或RGB

扫描系统: 40kpps振镜扫描

控制方式: ILDA

控制软件: 美国Pangolin(穿山甲);

德国Phoenix(火凤凰)

工作环境: 室内(10-35°)

NK-1102X/NK-802X

产品名称: 智能控制器
功能简介: 智能控制器是智能灯光控制系统核心组件; 常规照明灯、娱乐效果灯、门牌服务灯、具DMX512功能的娱乐效果灯、摇头灯、RGB/全彩灯带、排风、空调、点歌系统的切换选择、音量调整功能和摇麦等包房几乎全部设备均可集中此设备统一控制。

- 基本参数:
- ◆工作电压: AC220V 50Hz
 - ◆开关路数及功率: 2*3KW+9*1KW/2*3KW+6*1KW
 - ◆2路调光通道: AC220V 1KW*2
 - ◆总负载: <6KW (不含空调、不含DMX灯具电源)
 - ◆灯光场景模式: 16个 (1-8场景具有DMX512学习功能, 9-14场景只有开关和调光功能, 场景15为全关, 场景16为全开)。
 - ◆场景叠加、切换、开关: 继电器通道单独切换
 - ◆面板直连: 支持
 - ◆风机盘管式中央空调控制: 高中低风+风开/风关
 - ◆风机空调控制 (多联机、风管机): 红外控制
 - ◆DMX512通道数: 256CH(V0.9版本的支持512CH)
 - ◆DMX512学习时间: 1-8场景DMX512总共有学习时间为21分钟, 每个场景学习时间为20秒至5分钟, 时间可调。
 - ◆灯光与歌曲类型同步: 支持
 - ◆灯光与音乐节奏同步: 外接音频检测器
 - ◆RS232接口: 3.5耳机插座*1
 - ◆RS485接口: RJ45*2
 - ◆摇麦接口: 5.0的2P插座*1
 - ◆集成中控功能
 - ◆外形尺寸 (长X宽X高 mm): 345*185*75



NK-800

产品名称: DMX灯光控制器
功能简介: DMX灯光控制器可控制具DMX512功能的娱乐效果灯、摇头灯、RGB/全彩灯带以及红外控制风机空调 (多联机、风管机) 和摇麦

- 基本参数:
- ◆工作电压: AC220V 50Hz
 - ◆灯光场景模式: 8个具有DMX512学习功能的场景
 - ◆面板直连: 支持
 - ◆风机空调控制 (多联机、风管机): 红外控制
 - ◆DMX512通道数: 256CH
 - ◆灯光与歌曲类型同步: 支持 (需外接中控器)
 - ◆灯光与音乐节奏同步: 外接音频检测器
 - ◆RS232接口: 3.5耳机插座*1
 - ◆RS485接口: RJ45*2
 - ◆摇麦接口: 5.0的2P插座*1
 - ◆外形尺寸 (长X宽X高 mm): 225*85*49



NK-810

产品名称: 带中控灯光控制器
功能简介: 内置中控功能, 8路开关可通过控制回路来控制照明灯具和娱乐效果灯, 其中有三路可设置为空调高中低风控制

- 基本参数:
- ◆工作电压: AC220V 50Hz
 - ◆开关路数及功率: 8*1KW
 - ◆灯光场景: 8个+开机场景
 - ◆面板直连: 支持
 - ◆风机盘管式中央空调控制: 高中低三档风速
 - ◆灯光与点歌系统联动: 支持
 - ◆数据对接: 支持
 - ◆外形尺寸 (长X宽X高 mm): 225*85*49



NK-D05/D08

产品名称: 灯光控制器
功能简介: 通过控制回路来控制照明灯具和娱乐效果灯

- 基本参数:
- ◆工作电压: AC220V 50Hz
 - ◆开关路数及功率: 5*1KW / 8*1KW
 - ◆总负载: <6KW
 - ◆灯光场景: 8个+开机场景
 - ◆面板直连: 支持
 - ◆数据对接: 支持
 - ◆灯光与点歌系统联动: 支持, 需要连接中控
 - ◆外形尺寸 (长X宽X高 mm): 225*85*49



NK-100

产品名称: 中控器
功能简介: 实现多类控制面板、控制器、门牌灯等与上位机之间的通讯中继、传输指令
产品特点: 模块化设计, 小巧、紧凑, 可壁挂或固定于其它控制上; 能力面板、门牌灯提供工作电源, 系统布线简化
主要接口: LINK网口4个, USB串口1个, 3.5插孔串口1个
外形尺寸 (长X宽X高 mm): 143*56*24



BPM-01

产品名称: 音频检测器
功能简介: 对音频信号的信号进行采集, 并将音乐节奏BPM转换成数字信号输出至控制器, 实现声光同步的效果, 更好的表现灯光的艺术效果
产品特点: 内置拾音器, 可以选择使用线路输入音频信号或拾音器采集两种方式
主要接口: 立体声音频输入RCA1组, RJ45网口1个



NK-1330

产品名称: LED解码器
功能简介: 接受DMX512控制指令, 用于对LED灯条实现RGB三色调光
产品特点: 驱动能力强, 3路每路20A (灯条长度可达20米), 共阳方式, 直流5-36V宽电压设计
主要接口: DMX控制线4PIN插头2组, 驱动端6PIN插头1组
外形尺寸 (长X宽X高 mm): 125*57*25



NK-F03

产品名称: LED多色服务灯控制器
功能简介: 安装到用户自制的门牌服务灯内, 通过按键可以设定颜色及亮度, 双色闪烁指示状态
产品特点: 可用按键调节, 支持RGB无限混色, 三色交替闪烁时间颜色可调, 显示开房状态
主要接口: LINK网口2个



302D/303D/302HD/303HD

名称: 30系列控制面板 (灯光、空调、服务综合面板)
边框材质: 铝合金电镀
触摸屏材质及类型: 钢化玻璃, 电容触摸
按键数量: 15-18个
外形尺寸 (高X宽X深mm): 115*185*12或185*115*12



302/301/303

名称: 3系列控制面板
边框材质: 铝合金电镀
触摸屏材质及类型: 钢化玻璃, 电容触摸
按键数量: 12-18个
外形尺寸 (高X宽X深mm): 115*185*12或185*115*12



701/705

名称: 7系列控制面板
边框材质: ABS高光
触摸屏材质及类型: 钢化玻璃, 电容触摸
按键数量: 15/21个
外形尺寸 (高X宽X深mm): 190*120*10



202/202H/201/204/206

名称: 2系列控制面板
边框材质: ABS高光
触摸屏材质及类型: 钢化玻璃, 电容触摸
按键数量: 15/21/16/19/16个
外形尺寸 (高X宽X深mm): 240*110*9



501

名称: 5系列液晶控制面板
液晶屏尺寸: 10.1寸
液晶屏分辨率: 1024*600
边框材质: ABS
触摸屏材质及类型: TOP cover, 电容触摸
外形尺寸 (高X宽X深mm): 262*165*15



M15/M02/M04/M07/M10/M12/M01/M03

门牌服务灯
基础材质和工艺: 铝合金压铸框架, 电镀或金属框架, 电镀或亚克力材料或欧式铁艺件, 烤漆
号牌材质及工艺: 镜面亚克力印刷或黑色钛金板, 激光雕刻或玻璃板激光雕刻, 电镀
供电方式: LINK串口供电, 无须另配电源





P007/P008

72pcs LED par light

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ
Power Consumption: 180W/300W
LED source: 72pcs 1W/3W RGB LED (Red 18pcs, Green 18pcs, Blue 18pcs, White 18pcs)
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, Auto, Sound, Master & Slave
Housing: Aluminum
Working environment: indoor (10-35°)

72颗帕灯
技术参数:

工作电压: AC100-240V 50/60HZ
功率: 180W/300W
光源: 72颗1W/3W大功率LED灯珠 (红18、绿18、蓝18、白18)
透镜角度: 15°、25°、45°可选
颜色: 1670万颜色变化
控制方式: DMX-512, 声控、自走、主从
机壳材料: 铸铝
工作环境: 室内 (10-35°)



N-P003

72pcs 3 in 1 LED par light

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ
Power Consumption: 300W
LED source: 72pcs RGB 3 in 1 high power LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, Auto, Sound, Master & Slave
Housing: Aluminum
Working environment: indoor (10-35°)

72颗三合一帕灯
技术参数:

工作电压: AC100-240V 50/60HZ
功率: 300W
光源: 72颗3合一大功率LED灯珠
透镜角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512, 声控、自走、主从
机壳材料: 铸铝
工作环境: 室内 (10-35°)



N-P004

36pcs 4 in 1 LED par light

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ
Power Consumption: 300W
LED source: 36pcs 4 in 1 high power LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, Auto, Sound, Master & Slave
Housing: Aluminum
Working environment: indoor (10-35°)

36颗四合一帕灯
技术参数:

工作电压: AC100-240V 50/60HZ
功率: 300W
光源: 36颗4合一大功率LED灯珠
透镜角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512, 声控、自走、主从
机壳材料: 铸铝
工作环境: 室内 (10-35°)



N-P001/P002

60pcs 3W/1W LED par light

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ
Power Consumption: 200W/90W
LED source: 60pcs 1W/3W RGB LED (Red 14pcs, Green 14pcs, Blue 14pcs, White 18pcs)
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, Auto, Sound, Master & Slave
Housing: Aluminum
Working environment: indoor (10-35°)

60颗3W/1W帕灯
技术参数:

工作电压: AC100-240V 50/60HZ
功率: 200W/90W
光源: 60颗3W/1W大功率LED灯珠 (红14、绿14、蓝14、白18)
透镜角度: 15°、25°、45°可选
颜色: 1670万颜色变化
控制方式: DMX-512, 声控、自走、主从
机壳材料: 铸铝
工作环境: 室内 (10-35°)

N-P025

54 3W Warm white LED PAR Light 54颗3W 暖白LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: High power 3W Warm white LED
Beam angle: 15°, 25°, 45°(optional)
Color Temperature: 2800K/3200K
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4/8 channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 54颗3W大功率暖白LED
发光角度: 15°、25°、45°可选
色温: 2800~3200K
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4/8通道 (可选)
机壳材料: 铸铝, 颜色为: 黑色



N-P026

100W RGB (3 in 1) COB LED PAR Light

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W
Light Source: 1 pcs 100W RGB (3 in 1) COB LED
Beam angle: 40°
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Strobe: 0-20Hz
Outer cover material: Aluminum body

100w RGB 3合1 COB LED PAR灯

技术参数:

电源供应: AC90-240V, 50Hz~60Hz
功率: 120W
光源: 1颗100W RGB (3合1) COB LED
发光角度: 40°
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
频闪: 0-20Hz
机壳材料: 铸铝



N-P027

100W 2 in 1 COB LED PAR Light

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W
Light Source: 1 pcs 100W White and Yellow 2 in 1
Function: Each color can be controlled alone, 8CTs inside (2800, 3200, 500, 4200, 4900, 5600, 5900, 6500K) Also you can choose the CT in the DMX channels
Beam angle: 40°
Control mode: DMX-512, music control, automatic, master & slave
Strobe: 0-20Hz
Outer cover material: Aluminum body

100w 2合1 COB LED PAR灯

技术参数:

电源供应: AC90-240V, 50Hz~60Hz
功率: 120W
光源: 1颗100W 正白和黄色 (2合1) COB LED
功能: 每种颜色可单独控制, 内置了8种色温可选 (2800, 3200, 3500, 4200, 4900, 5600, 5900, 6500K), 也可以通过投台来混色。
发光角度: 40°
控制方式: DMX-512信号控制、声控、自走、主从
频闪: 0-20Hz
机壳材料: 铸铝



N-P020

12 pcs RGBW 4 in 1 LED PAR Light


12颗 RGBW 4合1 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 12 pcs 10W RGBW 4 in 1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

技术参数:

电源供应: AC90-240V, 50Hz~60Hz
功率: 200W
光源: 12颗10W RGBW 4合1 LED灯珠
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝





N-P012

54 pcs RGB 3 in 1 LED PAR Light
54颗RGB 3合1 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 54 pcs 3W RGB 3 in 1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 54颗3W RGB 3合1 LED
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝



N-P005 / N-P006

36 pcs LED PAR Light 36颗 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W/120W
Light Source: High power 1W or 3W LED
36 pcs of leds: 12 Red, 12 Green, 12Blue
Beam angle: 15°, 25°, 45°, optional
Color: RGB color mixing
Function: Color Changing, Strobe, Speed / Luminance adjustable, etc.
Control mode: DMX-512, music control, automatic, master & slave
Channel: 6channels
Outer cover material: Aluminium
Operating Environment: indoor

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 60W/120W
光源: 36颗1W/3W高功率LED (红色12颗, 绿色12颗, 蓝色12颗)
发光角度: 15°、25°、45°可选
颜色: RGB混色
功能: 颜色变化、频闪、渐变、速度/亮度调节
控制方式: DMX-512、声控、自走、主从
控制通道: 6通道
机壳材料: 铸铝
工作环境: 室内



N-P013/ N-P014

54 pcs LED PAR Light 54颗LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W/200W
Light Source: High power 1W or 3W LED
54 pcs of leds: 12Red, 14Green, 14Blue, 14White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W/200W
光源: 54颗1W/3W高功率LED(红色12颗, 绿色14颗, 蓝色14颗, 白光14颗)
发光角度: 15°、25°、45°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝



N-P009/ N-P010

54 pcs LED Waterproof PAR Light

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W/200W
Light Source: High power 1W or 3W LED
54 pcs of leds: 12Red, 18Green, 18Blue, 6White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

54颗LED防水 PAR灯

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W/200W
光源: 54颗1W/3W高功率LED(红色12颗, 绿色18颗, 蓝色18颗, 白光6颗)
发光角度: 15°、25°、45°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝



N-P015

24 pcs RGBW 4 in 1 LED Waterproof PAR Light

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 300W
Light Source: 24 pcs 10W RGBW 4 in 1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

24颗 RGBW 4合1 LED 防水 PAR灯

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 300W
光源: 24颗10W RGBW 4合1 LED灯珠
发光角度: 25°、40°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝



N-P016

18 pcs RGBW 4 in 1 LED Waterproof PAR Light

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 18 pcs 10W RGBW 4 in 1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

18颗 RGBW 4合1 LED 防水 PAR灯

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 18颗10W RGBW 4合1 LED灯珠
发光角度: 25°、40°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝



N-X008B

8 Eyes LED beam effect light

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ
Power Consumption: 60W
LED source: 8pcs cree 3WLED
Color: RGBW
Beam: 32 pcs beam
Beam angle: 360°infinite rotation
Control mode: DMX-512, Auto, Sound
Control channel: 7CHS
Housing: plastic
Working environment: indoor (10-35°)

8眼光束灯

技术参数:

工作电压: AC100-240V 50/60HZ
功率: 60W
光源: 8颗美国科瑞 3W 灯珠
颜色: 红、绿、蓝、白
光束: 32条光束
光束角度: 360度无极旋转
控制通道: 7CHS
控制方式: DMX-512、声控、自走
机壳材料: 阻燃工程塑料外壳
工作环境: 室内 (10-35°)



N-X008

8 Eyes LED pattern light

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ
Power Consumption: 60W
LED source: 8pcs cree 3WLED
Color: RGBW
Pattern: 8
Rotation angle: 360°infinite rotation
Control mode: DMX-512, Auto, Sound
Control channel: 7CHS
Housing: plastic
Working environment: indoor (10-35°)

8眼图案灯

技术参数:

工作电压: AC100-240V 50/60HZ
功率: 60W
光源: 8颗美国科瑞 3W 灯珠
颜色: 红、绿、蓝、白
图案: 8种图案
旋转角度: 360度无极旋转
控制通道: 7CHS
控制方式: DMX-512、声控、自走
机壳材料: 阻燃工程塑料外壳
工作环境: 室内 (10-35°)



2014/2014A

MINI LED Super Rocket

Technical Parameters:

Power Supply: AC100~240V, 50HZ~60HZ
Power consumption: 25W
Light Source: 4 pcs 3W or 6 pcs 1W led
Color: 4 or 6 color
Control mode: DMX-512, music control, automatic
Channel: 8 channels
Operating Environment: indoor

LED 迷你无极射

技术参数:

额定电压: AC100~240V, 50Hz~60Hz
功率: 25W
光源: 4颗3W或6颗1W 灯珠
颜色: 四色或六色
控制方式: DMX-512、声控、自走
控制通道: 8通道
工作环境: 室内



N-X013B

Mini LED Super Rocket

Technical Parameters:

Power Supply: AC100~240V, 50HZ~60HZ
Power consumption: 25W
Light Source: 4 pcs 3W
Color: Red and Green and Blue and White
Control mode: DMX-512, music control, automatic
Channel: 8 channels
Lens: 8*8 PCS
Operating Environment: indoor

Mini LED无极射

技术参数:

额定电压: AC100~240V, 50Hz~60Hz
功率: 25W
光源: 4颗3W LED灯珠
颜色: 红绿蓝白
控制方式: DMX-512、声控、自走
控制通道: 8通道
镜头: 8*8片
工作环境: 室内



N-X036

LED 4 eyes infinite beam light

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power consumption: 60W
Light Source: 4pcs 10w RGBW(4in1)LEDs
Color: RGBW
Control mode: DMX-512, music, automatic
Operating Environment: indoor

LED四眼无极光束灯

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 60W
光源: 4颗RGBW 4合一灯珠
颜色: 红、绿、蓝、白
控制方式: DMX-512信号控制、声控、自走
工作环境: 室内



N-X014

LED Magic Crystal Ball

Technical Parameters:

Power Supply: AC100~240V, 50HZ~60HZ
Power consumption: 25W
Light Source: 6pcs 3W LED
Color: Red and Green and Blue
Control mode: DMX-512, music, automatic
Channel: 6 channels
Operating Environment: indoor

LED水晶魔球

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 25W
光源: 6颗3W LED
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走
控制通道: 6通道
工作环境: 室内



N-X014A/N-X014B

LED Magic Crystal Ball

LED MP3 Magic Crystal Ball

Technical Parameters:

Power Supply: AC110V/AC230V, 50HZ~60HZ
Power consumption: 20W
Light Source: 6 pcs 1W or 3 pcs 1W
Color: 6 color: Red and Green and Blue and white and yellow and pink
Or 3 color: Red and Green and Blue
Control mode: automatic automatic, Music control, remote control
Operating Environment: indoor

LED 水晶魔球

LED MP3水晶魔球

技术参数:

额定电压: AC110V/AC230V, 50Hz~60Hz
功率: 20W
光源: 6颗1W或3颗1W 灯珠
颜色: 6色: 红、绿、蓝、白、黄、粉红 或 3色: 红绿蓝
控制方式: 仅自走或自走、声控、遥控
工作环境: 室内



N-X012

LED Magic Crystal Ball

Technical Parameters:

Power Supply: AC110V/AC230V 50HZ~60HZ
Power consumption: 20W
Light Source: 9W LED diodes
Color: Red and Green and Blue
Control mode: DMX-512, music, automatic, master & slave
Channel: 7 channels
Outer cover material: Iron
Operating Environment: indoor

LED水晶魔球

技术参数:

额定电压: AC110V/AC230V 50Hz~60Hz
功率: 20W
光源: LED 大功率 9W
颜色: 红、绿、蓝
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 7通道
机壳材料: 铁
工作环境: 室内






N-X026

Ceiling LED EFFECT LIGHT
Technical Parameters:

Power consumption : 30W
Light Source : 4 or 6 pcs 3W led
Color : RGBW OR RGBWYP

吸顶LED水晶魔球
技术参数:

功率: 30W
光源: 4颗/6颗3W 灯珠
颜色: 红、绿、蓝、白或红、绿、蓝、白、黄、紫



N-X035

LED Full Color Kaleidoscope Light
Technical Parameters:

Power supply : AC 100-240 V 50/60Hz
Power Consumption: 90W
Light Source: 60W LED
Color : RGBW full color

Control mode : DMX-512, Music control,
Automatic

LED七彩万花筒
技术参数:

电源供应: AC100-240V/50-60HZ,
功率: 90W
光源: 60W LED灯珠
颜色: RGBW全彩

控制模式: DMX-512/声控/自走




N-S022

MINI Strobe
Technical Parameters:

Power Supply: AC100-230V, 50HZ-60HZ
Power consumption: 25W
Light Source : 1 pcs 20W LED
Function: flash pace adjustable
Control mode: automatic, music control
Operating Environment : indoor

迷你20W频闪
技术参数:

额定电压: AC100-230V, 50HZ-60HZ
功率: 25W
光源: 1颗20W LED
功能: 频闪速度可调
控制模式: 自走, 声控
工作环境: 室内



N-S013/S014/S015

20w/30w/50w ceiling LED strobe light
Technical Parameters:

Power Supply: AC100-240V, 50HZ-60HZ
Power consumption: 80W
Light Source : 1 pcs 20W/30W/50W white LED
Function: flash pace adjustable
Control mode: music control, automatic
Outer cover material: Iron
Operating Environment : indoor

20w/30w/50w 吸顶LED频闪
技术参数:

电源供应: AC100-240V, 50HZ-60HZ
功率: 60W max
光源: 1颗20W/30W/50W 高功率白色LED
功能: 频闪速度可调
控制模式: 自走, 声控
机壳材料: 铁
工作环境: 室内



N-C1308

Controller 1308
Technical Parameters:

Power input: DC 9-12V 1000ma min
Dimensions: 250mmX150mmX100mm
Net Weight: 1.5kg
Also it have following functions except the parameter of downloaded program-mes can not be changed.
Choose 1 among the 7 different programmes
Change the speed of the sequence of the programme
Run the programme normally or automatically
Stop the programme
Storage up to a maximum of 7 different programmes up to a maximum of 127 cues for each programme
It accepts up to a maximum of 512 DMX channels
The programmes are stored in a flash memory 4Mb
The advantage of Easy control is not only price but also convenient use method -- it is really very easy to operate even you not know anything about DMX 512 console before.

控制台1308
技术参数:

电源输入: DC9V 1000mA
外形尺寸: 250mmX150mmX100mm
重量: 1.5kg
易控台除了不能直接更改下载的程序外还有如下功能:
* 备有7个可录制编程空间
* 场景转换速度可调
* 可由手动或自动驱动场景转换
* 暂停场景转换功能
* 最多可以存储7个不同的程序, 每个程序可以有127个不同的步
* 它最多可以控制512个通道
* 程序是储存在一个4MB的闪存里
易控台的优点不仅在于价格而且操作方法非常方便 -- 是真正的易于操控的, 哪怕你从来没有用过DMX512控制台。

N-C1323

Controller 1323
Technical Parameters:

* 3Pin female DMX connector
* Dimension: 482X133X75 mm
* Net weight: about 2.2KG.
* Controls up to 12 intelligent lights of up to 16 channels each
* 23 banks of 8 scenes, 184 scenes max
* 192 DMX channels of control
* 6 sets of chases containing 240 scenes
* Sequential linking of chases
* Grab any fixture on the fly
* 3 space 19" rack mount
* MIDI compatible
* Beat activation, tap-sync and auto run

控制台1323
技术参数:

* 3芯母 DMX 输入座
* 尺寸: 482X133X75 mm
* 净重: 约 2.2KG.
* 可控每台有16通道的灯12台
* 可编程23个记忆储存 (bank), 每个可储存8个场景 (scene) 共计192通道
* 6个可编程步序 (chase), 每个步序可编184步 (即23个bank8个 scene)
* 步序 (chase) 可循环运行
* 可随意提灯操作
* 可控声, 同步或是自动运行
* 标准19"机柜安装长度
* MIDI输入
* 断电、重启自动播放功能



N-C1312

Controller 1312
Technical Parameters:

* Frequency: 2.45GHz
* Transmit distance: 300m (Visible distance)
* Limitless receivers
* DMX channel: 512 CHL (each receiver)
* Antenna: Helical SMA antenna
* Electric: AC100-240V, 50/60Hz
* Dimension: 153 x 147 x 41mm
* Net Weight: 0.5kg (with AC power supply)
Specification:
* Maximum 16 transmitters at same place without any disturb.
Each transmitter has 512 channels and total 8192 channels.
* Professional and un-replaceable W-LAN product for convenient use to control as much as maximum lighting units you need especially for architectural building.
* Easy learn and operate
* One transmitter to one receiver, One transmitter to multiple receiver or Multiple transmitter to multiple receiver.
* Free set frequency and transmit password with transmitter and receiver via buttons on operation panel

控制台1312
技术参数:

* 频率: 2.45GHz
* 接收器数量不受限制
* 最远距离: 250米 (无障碍情况下)
* 尺寸: 153X147X41
* 电源: 100-240V, 50/50HZ
* 重量: 0.5KG (含电源)
* DMX通道数: 512通道 (每一个接收器) 特征
* 同一个地点最多安装16个发送器, 准确快速互不干扰, 每一个发送器都有512通道, 最多可控制8192通道
* 此产品非常专业, 是不可替代的简单实用的产品, 多台同时使用时可以最大限度的实现你想要控制的灯特别是在建筑上
* 简单易学, 操作方便
* 可以一发送一接收, 可以一发送多个接收, 也可以多个发送多个接收
* 发送器和接收器可以通过按键切换频率和通讯密码可以自己设定





N-C512A

Controller 512A 控制台 512A

Technical Parameters:

Power supply: DC9V 1000mA
DMX512/1990 Standard, 512 channels
Up to 32 scanners may be connected with a maximum of 16 channels each assignable joystick for easy of movement, four keys fine adjustment
8 chases and 32 scenes can be run at the same time
32 chases (at most 120 steps for each chase)
3840 chase steps
The music trigger source can be selected between audio line input or in-build microphone
The Data auto-saves
DMX signal output connector: XLR-D3F X4
Size: 482mmX300mmX100mm
Net Weight: 6Kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990信号输出, 512个控制通道
512个控制通道
可同时控制32台16通道电脑灯
16个通道的控制推子
一个可设置的摇杆装置
可同时运行8个走灯程序和32个场景
32个走灯程序, 每个程序最大120步
共3840个电脑灯走灯程序步
走灯音乐同步, 线路电平-10dB--+10dB
自适应/机内话筒
关机数据保存
DMX信号输出连接器: XLR-D3F X4
外形尺寸: 482mm x 300mm x 100mm
重量: 6.0KG

N-CS512

Controller S512 控制台 S512

Technical Parameters:

Power input: DC9V 1000mA
DMX512/1990 standard, 512 DMX control channels, 4 output with optical isolated, withstand 2000Vrms.
Up to 32 scanners may be connected with a maximum of 16 channels each.
A large backlight LCD to display operation parameters.
16 sliders for channel, 1 slider for speed control, 1600 chase steps, 48 chases, up to 100 steps each. Each step contains its speed and cross time, can be set respectively. Trigger mode selectable: Music synchronously and manual speed.
Cooperating with the chase speed slider, the time of the program step can be changed from 0.03s to 180s.
48 scanner scenes can be used directly.
8 chases, 48 scenes operated at the same time.
At most 32 scanners can be selected
15 environment programs to output the combination, which are composed of different scenes, chases and manual output quickly.
Dimension: 498 x 420 x 115mm
Net Weight: 6.5kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990标准, 512个DMX控制通道,
2路带光隔离的独立输出驱动端口, 具有抗2000VDC电气冲击能力。
可控制32台16通道电脑灯。
带背光的大屏幕LCD显示各种运行参数。
1600个走灯程序步储存容量, 48个走灯程序, 每程序最多100步, 每步速度、渐变参数独立设置, 可选音乐同步或手动速度控制。
在走灯速率推杆的配合下, 程序步的时间范围可从0.03S-180S。
48个可直接调用的电脑灯场景。
可同时运行8个走灯程序, 48个场景, 并可同时对32台电脑灯进行手动运行(提灯)。
15个环境键, 快速调用不同的场景、走灯、手动运行组合。
尺寸: 498mm x 420mm x 115mm
重量: 6.5KG

N-C200

Controller 200 控制台 200

Technical Parameters:

Power input: DC 9-12V 1000ma min
DMX512/1990 Standard
Total of 192 output channels
30 banks have 8 programmable scenes each
16 slider for manual control of channels
Midi control over banks, chases and Blackout
Record up to 6 programmable chases with fade time and speeds
LED function and program display
Built in microphone for music triggering
Auto mode program controlled by fade time sliders
Dimensions: 520mm x 183mm x 73mm
Net Weight: 3.0kg

技术参数:

电源输入: DC9V 1000mA
DMX512/1990信号输出, 192控制通道
有30个BANKS, 每个BANKS有8个可编程的SCENES
有16个可调位器调节输出大小, 内置MIC头, 提供声音触发, 在自动触发状态, 通过TAP SYNC键或 SPEED电位器确定自动触发时间在MIDI接口, 可用MIDI信号控制, 4位数码显示屏, BLACK OUT功能可用于手动或MIDI功能控制, CHASES编程和 CHASES运动功能, 可用手动或MIDI控制输出延时功能, 用FADE TIME电位器调节延时时间
外形尺寸: 520mm x 183mm x 73mm
重量: 3.0KG



N-C2024

Controller 2024 控制台 2024

Technical Parameters:

Power supply: DC9V 10 00mA
DMX512/1990 Standard, 504 channels
Up to 20 scanners may be connected with a maximum of 24 channels each 24 channels for dimmers
8 slider for manual control of channels assignable joystick for ease of movement
24 chases (at most 40 steps for each chase)
960 chase steps
Each chase speed and cross time can be saved automatic
128 K high capacity memory card
The Data auto-saves
DMX signal output connector: XLR-D3F
Size: 485mm x 250mm x 91mm
Net Weight: 5Kg

技术参数:

电源输入: DC9V 10 00mA
DMX512/1990信号输出, 504个控制通道
可同时控制20台24通道电脑灯 + 24调光通道
8个通道的控制推子
一个可设置的摇杆装置
24个走灯程序, 每个程序最大40步
共960个电脑灯走灯程序步
各程序速度、渐变值自动记忆
128K 大容量记忆
关机数据保存
DMX信号输出连接器: XLR-D3F
外形尺寸: 485mm x 250mm x 91mm
重量: 5kg



N-C1216

Controller 1216 控制台 1216

Technical Parameters:

Power supply: DC9V 10 00mA
DMX512/1990 Standard, 240 channels
Up to 12 scanners may be connected with a maximum of 16 channels each 24 channels for dimmers, 24 channels for switch of lamp
8 slider for manual control of channels assignable joystick for ease of movement
12 chases (at most 40 steps for each chase)
480 chase steps
Each chase speed and cross time can be saved automatic
128 K high capacity memory card
The Data auto-saves
DMX signal output connector: XLR-D3F
Size: 485mm x 250mm x 91mm
Net Weight: 5Kg

技术参数:

电源输入: DC9V 10 00mA
DMX512/1990信号输出, 408个控制通道
可同时控制12台16通道电脑灯 + 24调光通道 + 24开关通道
8个通道的控制推子
一个可设置的摇杆装置
12个走灯程序, 每个程序最大40步
共480个电脑灯走灯程序步
各程序速度、渐变值自动记忆
128K 大容量记忆
关机数据保存
DMX信号输出连接器: XLR-D3F
外形尺寸: 485mm x 250mm x 91mm
重量: 5kg



N-C240A

Controller 240A 控制台 240A

Technical Parameters:

Power input: DC 9-12V 300ma min
12 scanners of 16 channels each
30 banks have 8 programmable scenes each
6 programmable chase have 240 scenes each
8 slider for manual control of channels
2 assignable wheels for ease of movement auto mode program controlled by speed and fade time sliders
fade time/assign fade time
reversible DMX channels fixture to react in opposition to others in a chase
8 channel or 16 channel mode
fine adjustment for Wheel pan and tilt
blackout master button
manual override button allow you to grab any fixture on the fly
built in microphone for music triggering
midi control over banks, chases and blackout
power failure memory
Dimensions(mm): 482 x 190 x 90
Net Weight: 3.0kg

技术参数:

电源输入: DC9-12V 300mA
最多可控制12台电脑灯, 每台电脑灯最多16个通道
可编程30个记忆缓存 (Bank), 每个可存储8个场景 (Scene)
6个可编程程序 (Chase), 每个程序可编240步 (即30个Bank Scene)
8个通道控制推子
两个手控轮
在自动运行模式中, FADE可选择全部具有ALL或X/Y, 具有FADE, 都具有SPEED调节, 8通道或16通道工作模式
数码轮装置可对灯具的水平/垂直运动进行微调
具Blackout输出
内置麦克风, MIDI控制
掉电记忆保护
尺寸: 482mm x 190mm x 90mm
重量: 3.0KG



烟机系列
Fog machine series

AB-1500



Power: 1500W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 12 minutes
Tank capacity: 2L
Approx. Fog Projection: 12 M
Output: 2000cu.ft/min
Control mode: Circuitry Control,
Remote Control
Weight: 7.4KG
Size: 46.5*22.5*19.5(cm)
功率: 1500W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 12分钟
油桶容量: 2L
喷油距离: 12米
喷油量: 2000cu.ft/min
控制模式: 线控、遥控
重量: 7.44KG
尺寸: 46.5*22.5*19.5(cm)

F-3000R



Power: 3000W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 12 minutes
Tank capacity: 10L
Output: 4000cu.ft/min
Control mode: DMX512,Manual
Controller,
Remote Control
Weight: 20KG
Size: 72*31*18(cm)
功率: 3000W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 12分钟
油桶容量: 10L
喷油量: 4000cu.ft/min
控制模式: DMX512、线控、遥控
重量: 20KG
尺寸: 72*31*18(cm)

S-1200



Power: 1200W
Voltage: AC110V,220-250V 50/60Hz
Tank capacity: 5L
Output: 60 Cubic Meters
Control mode: DMX512,Circuitry Control,
Remote Control
Weight: 11KG
Size: 51.5*31*23(cm)
功率: 1200W
工作电压: AC110V,220-250V 50/60Hz
油桶容量: 5L
喷油量: 60 Cubic Meters
控制模式: DMX512、线控、遥控
重量: 11KG
尺寸: 51.5*31*23(cm)

Z-800



Power: 900W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 7 minutes
Tank capacity: 1L
Output: 5000cu.ft/min
Control mode: Circuitry Control
Weight: 4KG
Size: 33*17*14(cm)
功率: 900W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 7分钟
油桶容量: 1L
喷油量: 5000cu.ft/min
控制模式: 线控
重量: 4KG
尺寸: 33*17*14(cm)

AB-1200



Power: 1200W
Voltage: AC110V, 220-250V 50/60Hz
Heat-up Time: 8 minutes
Tank capacity: 2L
Approx. Fog Projection: 10 M
Output: 1800cu.ft/min
Control mode: Circuitry Control,
Remote Control
Weight: 6.8KG
Size: 49.5*23*14(cm)
功率: 1200W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油桶容量: 2L
喷油距离: 10米
喷油量: 1800cu.ft/min
控制模式: 线控、遥控
重量: 6.8KG
尺寸: 49.5*23*14(cm)

AB-900



Power: 900W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 8 minutes
Tank capacity: 1L
Approx. Fog Projection: 8 M
Output: 5000cu.ft/min
Control mode: Circuitry Control,
Remote Control
Weight: 4.6KG
Size: 33.5*19*14(cm)
功率: 900W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油桶容量: 1L
喷油距离: 8米
喷油量: 5000cu.ft/min
控制模式: 线控、遥控
重量: 4.6KG
尺寸: 33.5*19*14(cm)

T-400



Power: 400W
Voltage: AC110V,220-250V 50/60Hz
Heat-up Time: 8 minutes
Tank capacity: 0.3L
Output: 2000cu.ft/min
Control mode: Circuitry Control
Weight: 2.5 KG
Size: 23*11*11(cm)
功率: 400W
工作电压: AC110V,220-250V 50/60Hz
预热时间: 8分钟
油桶容量: 0.3L
喷油距离: 8米
喷油量: 2000cu.ft/min
控制模式: 线控
重量: 2.5KG
尺寸: 23*11*11(cm)

B-300



Power: 300W
Voltage: AC110V,220-250V 50/60Hz
Bubble Oil Container: 2.5L
Blowing Height: 10 M
Output: 600 cubic meters
Control mode: Remote Control
Weight: 14KG
Size: 45*39*41(cm)
功率: 300W
工作电压: AC110V,220-250V 50/60Hz
油桶容量: 2.5L
喷油距离: 10米
喷油量: 600 cubic meters
控制模式: 线控
重量: 14KG
尺寸: 45*39*41(cm)

新感觉灯光

—— 酒吧、KTV全线灯光供应商



广州新感觉灯光音响设备有限公司是一家集科研、生产、销售、工程服务为一体的科技型专业灯光民营企 业。本司聚集了一批光电科技研发精英和经验丰富、技术精湛的专业生产施工人员，精雕细琢后推出了品 种繁多、质量上乘的智能化舞台灯光系列产品。目前主要产品包括了智能KTV灯光系列产品（摇头灯、LED 效果灯等）、大功率激光灯系列产品和LED帕灯系列产品。

卓越的品质和优良的服务为我们赢得了广阔的市场空间，也使我们的产品倍受国内外用户的青睐；目前我 们已经和欧亚、南北美洲等多个国家和地区建立了代理、经销等多种形式的合作关系，而在国内各地的舞台灯 光工程、市政工程、地标建筑、主题公园、舞厅、俱乐部、电视台、歌剧院及大型演出等场所，我们的产品也 得到了广泛的应用。

以精品缔造行业传奇，以品质树立诚信品牌，以服务感动所有客户，新感觉愿与您携手并进，共同打造灯 光世界的绚丽辉煌！

Guangzhou New Feel Lighting & Audio Equipment CO. LTD is a researching, producing, selling and professional privately-owned manufacturer. We gathered a group of experienced photoelectric R & D elites and skilled producing technicians. We are professional supplier specializing in all range of lighting for bars and KTV, now our main products including moving head series, laser series, LED PAR light series, LED effect series and strobe light etc.

With superior quality and excellent service has made us owned a board marketing space and enabled our products highly appreciated both at home and abroad. At present we established agents, distributions and many other kinds of cooperating relationship with Europe and Asia, North and South Americas and so on. Our products have widely used in our own country, such as stage lighting engineering, municipal works, land mark building, themepark, dancehall, club, opera house, big show and other entertainment venues.

Well-made goods make industrial legend, quality entrusted brand, superior service inspire customer. In order to be remarkable in lighting field, New Feel is looking forward to working with you.



配件系列 Accessories Series

保险绳 / Safety rope



灯架 / Stand



重烟油 Heavy Fog Oil DJ烟油 DJ Fog Oil 烟油 Fog Oil 德国油 Germany Fog Oil 雪花油 Snow Oil 泡泡油 Bubble Oil 喷火油 Fire Machine Oil

灯钩 / Lighthook



玻璃球 / Glass Ball Light

色片 / Color Filter (1x40m)



航空箱 / Fly Box



光源
Lamp With Different Measurement






KTV、酒吧全线灯光优质供应商
Professional supplier specializing in
all range of lighting for bars and KTV



KTV、酒吧全线灯光优质供应商
Professional supplier specializing in
all range of lighting for bars and KTV

KTV智能灯光领跑者.....

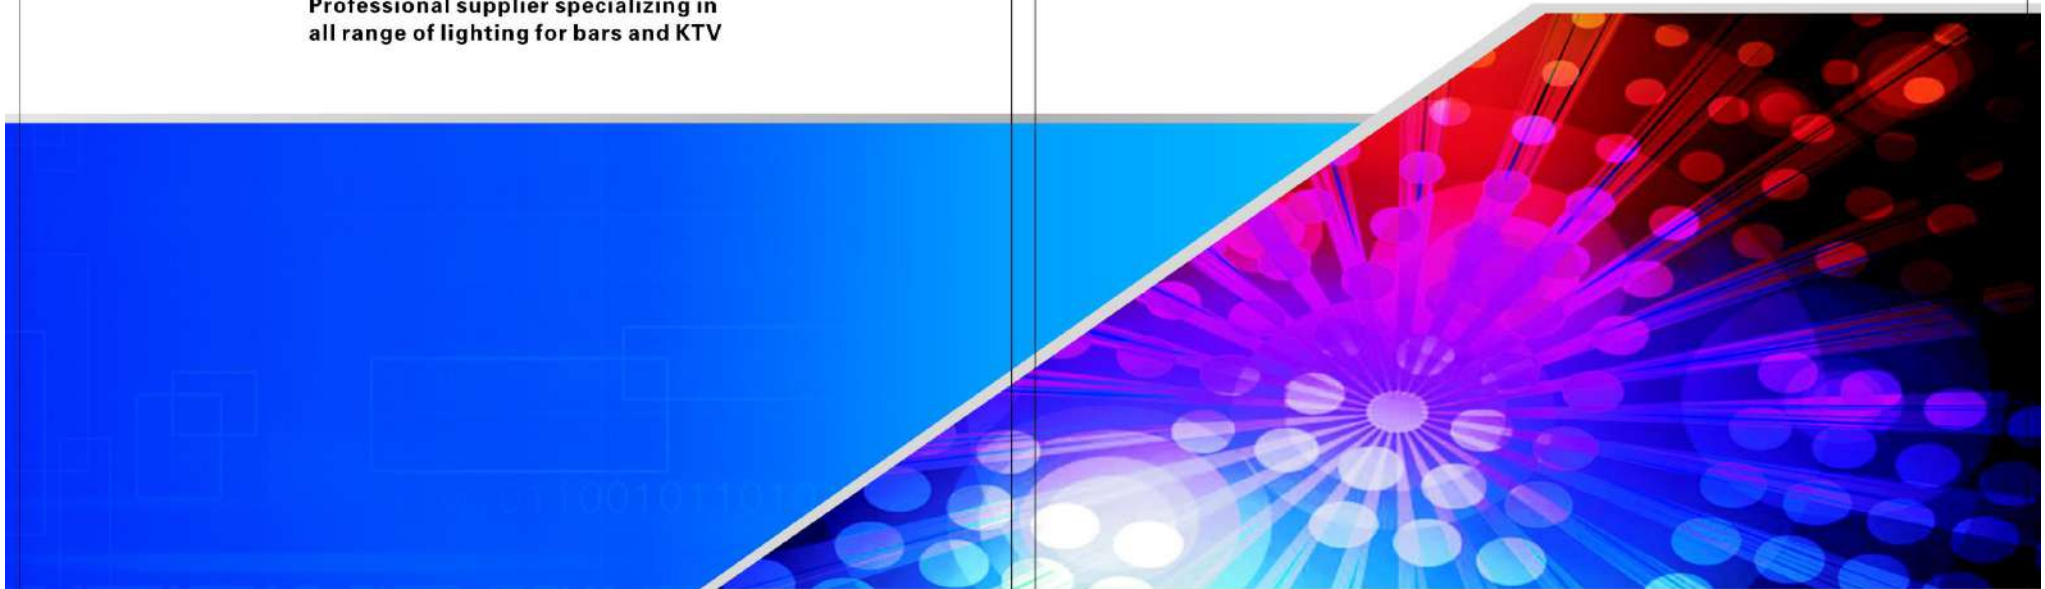

新感觉实业发展有限公司
NEW FEEL INDUSTRIAL DEVELOPMENT LIMITED

广州新感觉灯光音响设备有限公司
GUANGZHOU NEW FEEL LIGHTING AND AUDIO EQUIPMENTS CO.,LTD.

地址：广州白云区白云湖街道榕溪榕荫路35号榕荫工业园B栋2楼

Add: 2/F, Rongyin Industry Zone, No.35, Rongyin Road, Baiyun lake street
Baiyun District, Guangzhou, China.

Tel: +86 20-36393166 36396409 36391055 36391255

Http://www.newfeellight.com

E-mail: info@newfeellight.com

2017~2018 Catalogue