

新感觉实业发展有限公司
New feeling industrial development co., LTD
广州新感觉灯光音响设备有限公司
Guangzhou new feel lighting and audio equipment co., LTD

地址：广州白云区白云湖街道榕溪榕茵路35号榕茵工业园B栋2-3楼
ADD:2-3F,Rongyin Industry Zone,No.35, Rongyin Road, Baiyun lake street
Baiyun District, Guangzhou, China.
Tel:+86 20-36393166 36396409 36391055 36391255
Http://www.newfeellight.com
E-mail: info@newfeellight.com

新感觉灯光 秀出灯光新感觉

广州新感觉灯光音响设备有限公司——灯光音响设备画册



NF 新感觉灯光
NEW FEEL LIGHTING

COMPANY INTRODUCTION

公司简介

广州新感觉灯光音响设备有限公司座落于坐落于广州白云区白云湖街，是一家集科研、生产、销售、工程服务为一体的科技型专业灯光民营企业。

本司聚集了一大批光电科技研发精英和经验丰富、技术精湛的专业生产施工人员，精雕细琢后推出了品种繁多、质量上乘的灯光产品：目前主要产品为：智能化舞台灯光系列（分为激光灯系列、LED灯系列和摇头灯系列等）、城市景观照明LED系列。

卓越的品质和优良的服务为我们赢得了广阔的市场空间，使得我们的产品倍受国内外用户的青睐；目前我们已经和欧亚、南北美洲等国际上50多个国家建立了代理、经销等多种形式的合作关系，而在国内各地的舞台灯光工程、市政工程、地标建筑、主题公园、舞厅、俱乐部、电视台、歌剧院及大型演出等场所，我们的产品也得到了广泛的应用。

“新感觉”愿与您携手并进，共创灯光世界新感觉！

Guangzhou new feeling of lighting sound equipment Co., Ltd. is located in Guangzhou Baiyun District Shijing Town, is a collection of scientific research, production, sales, engineering services as one of the scientific and technological professional lighting private enterprises.

The company gathered a large number of photoelectric technology R & D elite and experienced and skilled professional workers, fine after the launch of a wide variety, high quality lighting products: at present, the main products are: intelligent lighting series (including laser lamp series, LED lamp series and lighting series), city landscape LED lighting series.

Excellent quality and excellent service for us to win a broad market space, so that our products are favored by domestic and foreign customers, and we have more than 50 countries in Europe and Asia, North and South America, the agency, distribution and other forms of cooperative relations, and in the stage lighting engineering, municipal engineering, landmark buildings, theme parks, dance halls, television, opera and other places, such as a wide range of products have been widely used.

"New feeling" is willing to work with you hand in hand, create a new sense of the world of light!



展会回顾

工程案例



2010年上海展

2011年广州展



2011年上海展



2012年北京展



2012年广州展

2013年北京展



2013年广州展



2014年广州展



2015年广州展




2015年北京展



2016年广州展



2016年德国展



2017年广州展




2017年上海展



2009年上海五月天演唱会



2010年成都中国会所



2012年增城, 你好! 新年晚会



2016年深圳沙井苏格缪斯酒吧



2012年邵武元宵焰火晚会



2012年台北灯会



2016年溧阳新东方派对俱乐部



2014-2017年宝乐迪全国连锁KTV



2016年湖北宜昌苏格缪斯酒吧



2016年南宁星悦里PTV



2016年南昌金捷KTV



2016西塘海森酒吧




2016年南宁唱爽KTV



2014-2017年福建欢唱连锁KTV



2016东莞港K party

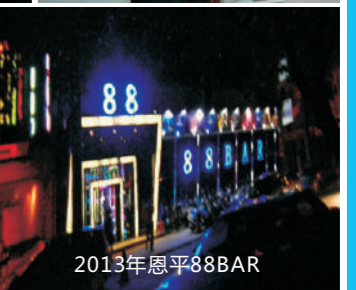

2013年恩平88BAR

01

智能KTV系列

01	N-Y060
02	N-Y062
02	N-Y022
03	N-Y040
03	N-Y039
04	N-Y006
04	N-Y027
05	N-Y750
05	N-Y160
06	N-X029
06	N-FX203
06	N-FX316
07	N-Z1512
07	N-F6022
08	N-X017
08	N-X016
08	N-X013A
09	N-X050
09	N-X018
09	N-X025



步进电机激光系列

23	N-F0971
24	N-F0536
24	N-F0973
25	N-F1088
25	N-F1080
26	N-F1033
26	N-F1066B
26	N-F1066
27	N-F1022
27	N-F2066

06

07

激光光束系列

28	N-Y005
28	N-FY666
29	N-F020
29	N-F010
29	N-F021

蜗牛系列

10	L001
10	L001B

02

激光地标/激光舞

30	HW-910
31	F5000

08

03

全彩动画系列

11	N-F6000
12	N-F2000
12	N-F4901
12	N-F810
13	N-F2723
13	N-FS750
13	N-F3723

09

LED全彩帕灯系列

32	N-P007
32	N-P003
32	N-P001
33	N-P009
33	N-P012
33	N-P013
34	N-P025
34	N-P028
34	N-P004
35	N-P005
35	N-P015
35	N-P016
36	N-P020
36	N-P026
36	N-P027



单色动画激光系列

14	N-F2000
15	N-F4675
15	N-F653
15	N-FS606
16	N-F2606
16	N-F2305

04

05

光栅效果激光系列

17	N-F1666
18	N-F1645
18	N-F1643
19	N-F2250
19	N-F1250
20	N-F1001
20	N-F2001
21	N-F099A
21	N-F1316
22	N-F203
22	N-F1208
22	N-F1209



摇头灯系列

37	N-B350
37	N-B200
38	N-Y001
38	N-Y002

10

11

LED效果灯系列

39	N-X014
39	N-X026
40	N-X013
40	N-S022

01 智能KTV系列



N-Y060/Y061

Embedded 60/90w pattern beam staining lights
嵌入式60/90W图案光束+染色

技术参数：

电源供应：AC100-240V, 50Hz~60Hz
 额定功率：90W
 图案光源：60W/90W大功率LED
 灯珠色温：7000-7500K
 染色光源：8颗大功率三合一灯珠
 染色颜色：红，绿，蓝
 染色角度：25度/45度可选
 图案颜色：6种颜色+白光+彩虹效果
 图案：6个图案+白光
 棱镜：三棱镜、八棱镜
 扫描角度：水平540度，垂直270度
 运行模式：主从、自走模式、DMX-512模式、声控模式
 控制通道：2、12、19个通道
 工作环境：室内

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz
 Power consumption: 90w
 LED source: 60W/90W LED
 led color temperature: 7000-7500K
 Dyed light source: 8pcs 3 in 1 bulb
 Dyed color: Red, Green, Blue
 Dyed angle: 25°,45°(optional)
 Pattern Color: 6color + white + rainbow effect
 Pattern: 6 pattern + white
 Prism: 3pcs of prism/8pcs of prism
 Pan/Tilt: X axis 540°, Y axis 270°
 Control mode: DMX-512, automatic, master & slave, sound
 Control channel: 2/12/19CHs
 Working environment: indoor (10-35°)



N-Y062/N-Y063

Embedded 30w pattern+dyeing/Embedded 30W pattern+dyeing+laser
嵌入式30W图案染色二合一/嵌入式30W图案染色激光三合一

Technical parameters:

Power supply: AC100-240v/50~60Hz
 Power: 40w
 Laser:G80mw/515/532nm
 B1w/450nm R100-500mw/638nm
 Color: 7 colors + white light
 Pattern plate: 7 pattern + white light
 + rainbow effect
 Focus: manual focus
 Dimming: 0-100% linear adjustment
 Project the light range: level 540°,
 270° vertically
 Stroboscopic: 0~20hz
 Control mode: DMX512/self-walk/
 voice control

技术参数：

电源供应：AC100-240V/50~60Hz,
 功率：40W
 激光：80mw绿/515/532nm,
 1W 蓝/450nm,100-500mw 红/638nm
 颜色：7种颜色+白光
 图案盘：7图案+白光+彩虹效果
 调焦：手动调焦
 调光：0-100%线性调节
 投射光范围：水平540°，垂直270°
 频闪：0~20HZ
 控制模式：DMX512/自走/声控



N-Y022

Embedded 30w/10w LED pattern moving head light
嵌入式30W/10WLED摇头图案灯

Technical parameters:

Power supply: AC100-240v /50~60Hz
 Power: 40w
 Light source: 30W
 Color: 7 colors + white light
 Pattern plate: 7 pattern + white light
 + rainbow effect
 Focus: manual focus
 Dimming: 0-100% linear adjustment
 Project the light range: level 540°,
 270° vertically
 Stroboscopic: 0~20hz
 Control mode: DMX512/self-walk/
 voice control
 Channel number: 9 and 11 channels

技术参数：

电源供应：AC100-240V/50~60Hz,
 功率：40W
 光源：30W
 颜色：7种颜色+白光
 图案盘：7图案+白光+彩虹效果
 调焦：手动调焦
 调光：0-100%线性调节
 投射光范围：水平540°，垂直270°
 频闪：0~20HZ
 控制模式：DMX512/自走/声控
 通道数量：9和11 通道两种模式



N-Y040/Y041

Embedded dyed+green laser+blue laser web/red laser+green laser web
嵌入式染色+绿激光束+蓝激光网/嵌入式染色+红激光束+绿激光网



Technical Parameters:

Working voltage: AC100-240V 50/60Hz
Power: 70w
Light source: LED : COB RGB 40W,
Laser: 80mw green/515/532nm, 1W blue/
450nm, 100-500mw/638nm
Color: RGB colorless mixture
Dimming: 0-100% linear adjustment
Stroboscopic speed: 1-20 times per second
Channel mode: 2chs/8chs /15chs
The X axis Angle: horizontal 540°
The Y axis Angle: vertical 270°
Control mode: DMX-512, self-walk, voice
control, master-slave mode
Working environment: indoor (10-35°)
Installation: external hanging/suction top
Product features: exquisite appearance,
convenient installation, uniform brightness,
uniform color, bright colours, using imported
chip COB integrated light source, long service
life and is a cost-effective LED moving head
dyed light, suitable for KTV, qing, mini bar, etc.

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 70W
光源: LED: COB RGB 40W,
激光: 80mw 绿/515/532nm,
1W 蓝/450nm,100-500mw 红/638nm
颜色: RGB无极混色
调光: 0-100%线性调节
频闪速度: 1-20次/秒
通道模式: 2/8 /15通道
X轴角度: 水平540°
Y轴角度: 垂直270°
控制模式: DMX-512, 自走, 声控, 主从模式
工作环境: 室内 (10-35°)
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 亮度均匀,
色彩均匀, 色彩鲜明, 采用进口芯片的COB集
成光源, 使用寿命长, 是一款性价比高的LED摇
头染色灯, 适用于KTV、清吧、小型酒吧等

N-Y006

Embedded flowers bloom and close
嵌入式花开花合



Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 100W
LED source: 6pcs 15W RGBW 4 in 1
Color: RGBW mixed color
Dimmer: Grade 65536 electronic dimmable
Strobe speed: 1-30 times/second
Beam angle: 1..5°
Beam rotation: 360° infinite rotation
Control channel: 10chs / 17chs
Pan/Tilt: X axis 540°, Y axis 180°
Control mode: DMX-512, automatic, master
& slave, sound
Operating environment: indoor (10-35°)
Installation: hang on to the wall
Product feature: this product is with delicate
outlook, easy installation, strong beam, vivid
color with rainbow effect, we use 4 in 1 led for
this beam light, and with long life span which
can be used in KTV, bar, party etc.

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 100W
光源: 6颗 15W RGBW四合一灯珠
颜色: RGBW混色
调光: 65536级电子调光
频闪速度: 1-30次/秒
控制方式: DMX-512、声控、自走
光束角度: 1.5°
光束旋转: 360°无极旋转
通道模式: 10CHS、17CHS
X轴角度: 水平540°
Y轴角度: 垂直180°
工作环境: 室内 (10-35°)
安装方式: 嵌入/外挂
产品特点: 外形精巧, 安装简便, 颜色丰富多变,
光束立体感强, 多彩旋转流动彩虹效果, 采用大
功率四合一光源, 使用寿命长, 适用于KTV、
清吧、小型酒吧等

N-Y039/Y039G/Y039B/Y039R

Embedded dyeing+pattern+laser light
嵌入式染色+图案灯+激光三合一



Technical Parameters:

Working voltage: AC100-240V 50/60Hz
Power: 70w
Light source: COB RGB 40W+10W RGBW
Laser: 80mw green/515/532nm, 1W
blue/450nm, 100-500mw red/638nm
Color: RGB colorless mixture
Dimming: 0-100% linear adjustment
Stroboscopic speed: 1-20 times per second
Channel mode: 2chs/8chs /15chs
The X axis Angle: horizontal 540°
The Y axis Angle: vertical 270°
Control mode: DMX-512, self-walk, voice
control, master-slave mode
Working environment: indoor (10-35°)
Installation: external hanging/suction top
Product features: exquisite appearance,
convenient installation, uniform brightness,
uniform color, bright colours, using imported
chip COB integrated light source, long service
life and is a cost-effective LED moving head
dyed light, suitable for KTV, qing, mini bar, etc

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 70W
光源: COB RGB 40W+10W RGBW,
激光: 80mw 绿/515/532nm,1W
蓝/450nm,100-500mw 红/638nm
颜色: RGB无极混色
调光: 0-100%线性调节
频闪速度: 1-20次/秒
通道模式: 2CHS、8CHS、15CHS
X轴角度: 水平540°
Y轴角度: 垂直270°
控制模式: DMX-512, 自走, 声控, 主从模式
工作环境: 室内 (10-35°)
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 亮度均匀,
色彩均匀, 色彩鲜明, 采用进口芯片的COB集
成光源, 使用寿命长, 是一款性价比高的LED
摇头染色灯, 适用于KTV、清吧、小型酒吧等

N-Y027/N9T027G

7pcs/6pcs dyeing+laser light
七颗染色/6颗染色+激光



Technical Parameters:


Power supply: AC100~240V,50/60Hz
Power Consumption: 100w
Light Source: 7 pcs 10W (RGBW 4 in 1) LED
laser:G80mw/532nm
Channel: 9 or 14 channels
Stroboscopic: 1-25 times per second
Level Scanning: 540° (16 bit precision scan)
Vertical Scan: 180° (16 bit precision scan)
Smooth linear dimming: 0-100% dimmer
color: RGBW full color
Control mode: DMX-512, music control,
automatic, master & slave

技术参数:

输入电压: AC100-240V,50Hz-60Hz
最大功率: 100W
光源: 7颗10W RGBW四合一全彩LED 灯珠
激光: G80mw/532nm
通道: 9通道或14通道
频闪: 1-25次/秒
水平扫描: 540°+微调
垂直扫描: 180°+微调
颜色: 七彩色
控制: 自走、声控、主从、DMX512

N-Y750/740/Y720/Y710/Y705/Y605/610/620/Y305/310/320/330

RGB/Single color animation laser moving head light 嵌入式摇头全彩/单色动画激光




Technical Parameters:
Power Supply: AC100V-AC240V;50Hz/60Hz
Power consumption: 70W
Laser diode: RGB 500MW-5W
 G100MW-2000MW, B500MW-3000MW
Color: RGB, Green or Blue
Red: 650nm or 638nm Blue: 450nm
Laser pattern: 15 groups with 3800 patterns
Scan system: 20Kpps
Control channel: 10/40CHs
Pan/Tilt: X axis 540°, Y axis 270°
Control mode: DMX-512, automatic, sound, master & slave, SD card (optional)
Working environment: indoor(10-35°)
Installation: hang on to the wall
Product feature: this product is with delicate outlook, easy installation, plenty of patterns, vivid color, we use big storage and high speed single chip technique for this light, most importantly the storage is 15 groups and you can have more than 1900 pcs of patterns, This is a new and good product which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: 全彩500MW-5W,绿光100MW-2000MW
 蓝光500mw—3000mw
激光波长: 绿光: 532nm或520nm
红光: 650nm或638nm、蓝光: 450nm
扫描系统: 20kpps振镜
控制方式: DMX-512、声控、自走、主从、SD卡控制(可选)
通道模式: 10CHS、40CHS
X轴角度: 水平540度
Y轴角度: 垂直270度
工作环境: 室内(10-35°)
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 图案丰富, 色彩鲜明, 采用大容量、高速的单片机技术, 图库多达15组, 图案1900多个, 是一款性价比高的摇头激光灯, 适用于KTV、酒吧、小型酒吧等



N-Y1601/1602/1605/1610/1305/1310/1320/1330

Embedded monochrome animation laser 嵌入式单色动画激光



Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 70w
Laser diode: G100mw-2000mw,
 B500mw-3000mw
Color: RGB, Green or Blue
Laser wavelength: 532nm or 520nm
 Red:650nm or 638nm Blue:450nm
Laser pattern: 15 groups with 1900 patterns
Scan system: 20Kpps
Control mode: DMX-512, automatic, sound, master & slave, SD card (optional)
Control channel: 34CHs
Working environment: indoor(10-35°)
Installation: hang on to the wall or ceiling installation
Product feature: this product is with delicate outlook, easy installation, plenty of patterns, vivid color, we use big storage and high speed single chip technique for this light, most importantly the storage is 15 groups and you can have more than 1900 pcs of patterns, This is a new and good product which can be used in KTV, bar, party etc.

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 70W
光源: 绿光100mw—2000mw
 蓝光500mw—3000mw
激光波长: 绿光: 532nm或520nm 红光: 650nm
 或638nm、蓝光: 450nm
激光图案: 15组图案库, 每组255个, 共3800个图案
 或128幅图案
扫描系统: 15-20kpps振镜
控制方式: DMX-512、声控、自走、主从、SD卡控制(可选)
通道模式: 34CHS、10CHS
工作环境: 室内(10-35°)
安装方式: 外挂/吸顶
产品特点: 外形精巧, 安装简便, 图案丰富, 色彩鲜明, 采用大容量、高速的单片机技术, 图库多达15组, 图案1900多个, 是一款性价比高的摇头激光灯, 适用于KTV、酒吧、小型酒吧等

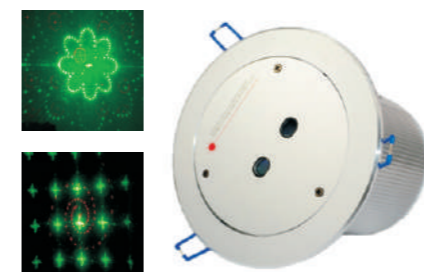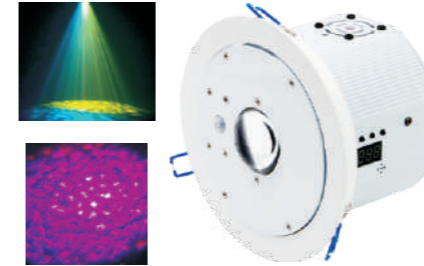

N-X029

LED Water Effect Light 嵌入式LED水纹灯

Technical Parameters:
Rated voltage: AC100-240v, 50hz-60hz
Power consumption: 30W
Light source: 1 10W CREE lamp bead
Color: monochrome or 4 colors
Control mode: DMX-512, automatic, sound, master & slave, inductive control (optional)
Working environment: indoor

技术参数:
额定电压: AC100-240V, 50Hz-60Hz
功率: 30W
光源: 1颗10W CREE灯珠
颜色: 单色或4色
控制方式: DMX512、自走、声控、主从、人体移动感应
工作环境: 室内

FX203/206

RG/RB laser Water Effect Light 吸顶红绿红蓝激光炫影灯

Technical Parameters:
Rated voltage: AC100-240v, 50hz-60hz
Power: 20W
Laser power: 650nm red light 100-150mw,
 532nm green 60-80mw,450nm blue 200-1000mw
Laser colors: red and green or red and blue
Control mode: DMX512, voice control, self-walk
Working environment: indoor (10-35°)

技术参数:
额定电压: AC100-240V, 50Hz-60Hz
功率: 20W
激光功率: 650nm红光100—150mw,532nm
 绿色60—80mw,450nm 蓝色200—1000mw
激光颜色: 红色和绿色或红色和蓝色
控制方式: DMX512、声控、自走
工作环境: 室内(10-35°)

FX316/FX316B/FX312/FX312B


RG/RB 16 in 1/2 in 1 grating Ceiling laser 红绿/红蓝吸顶16合一/12合一

Technical Parameters:
Power supply: AC110/AC230V,50Hz-60Hz
Rated power: 20W
Laser power: 650nm red light 100-150mw
 532nm green 50-532mw
 200-1000mw 450nm blue
Laser colors: red and green or red and blue
Laser pattern: 16/12
Control mode: DMX512, voice control, self-walk
Working environment: indoor(10-35°)

技术参数:
电源供应: AC110/AC230V,50Hz-60Hz
额定功率: 20W
激光功率: 650nm红光100-150mw
 532nm绿色50-100mw
 450nm蓝色200-1000mw
激光颜色: 红色和绿色或红色和蓝色
激光图案: 16/12个
控制方式: DMX512、声控、自走
工作环境: 室内(10-35°)

Z-1516/Z-3016/Z-6016

Intelligent light three combinations 三组合智能灯



Technical Parameters:
Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60w
LED source: 4pcs 3W led+20W integrated white Color:LED: RGBW, Strobe: White or blue
Laser: RG or RB
Laser diode: G50mw, R100mw, B500mw
Wavelength: G532nm, R650nm, B450nm
Grating pattern: 12/16 in 1
Control mode: DMX-512, automatic, sound, master & slave
Control channel: 10CHs
Working environment: indoor (10-35°)
Net weight: 1.3KG
Box size: 275X165X188mm
Master carton size: 580X360X410mm
 8pcs in 1
Installation: hang on to the wall or ceiling installation

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
LED光源: 4颗3W灯珠+20W集成白光
灯珠颜色: 魔球: 红、绿、蓝、白; 频闪: 白或蓝;
激光: 红绿或者红蓝
激光光源: G50mw、R100mw、B500mw
激光波长: 绿532nm、红650nm、蓝450nm
光栅图案: 12、16合一(可选)
控制方式: DMX512、声控、自走、主从
通道模式: 10CHS
净重: 1.3KG
包装尺寸: 275X165X188mm
包装尺寸: 580X360X410mm 8个装
安装方式: 外挂/吸顶
工作环境: 室内(10-35°)

F6022/6033

Six hole laser 六孔激光灯




Technical parameters:
Power supply: AC110/AC230V, 50Hz-60Hz
Rated power: 20W
Laser power: 650nm/638nm red 100-500mw
 532nm green 50-532mw
 450nm blue 200-1000mw
Laser colors: red and green or red and blue
 Laser pattern 16/12
Control mode: DMX-512, automatic, sound, master & slave
Working environment: indoor (10-35°)

技术参数:
电源供应: AC110/AC230V, 50Hz-60Hz
额定功率: 20W
激光功率: 650nm/638nm红光100-500mw
 532nm绿色50-100mw
 450nm蓝色100-1000mw
激光颜色: 红绿蓝
激光图案: 全部一维光束或一维光束+12/16个图案
控制方式: DMX512、声控、自走
工作环境: 室内(10-35°)

N-X017/N-X017S/N-X051

7/8 color LED effect light 3层七彩/八彩蝴蝶灯




Technical Parameters:
Working voltage: ac100-240v 50/60hz
Power: 60w
Light source: 2pcs 20W 7 in 1 or 8 in 1
Color: mixed color
Control mode: DMX512, voice control, self-walk
Channel mode: 10CHS
Outer shell: flame retardant engineering plastic housing
Net weight: 1.5 KG
Packing size: 275X245X180mm
Packing size: 570X510X390mm 8
Working environment: indoor (10-35°)

技术参数:
工作电压: AC100-240V 50/60Hz
功率: 60W
光源: 2颗20W 7合一或8合一灯珠
颜色: 七彩或八彩混合色
控制方式: DMX512、声控、自走
通道模式: 10CHS
外壳: 阻燃工程塑料外壳
净重: 1.5KG
包装尺寸: 275X245X180mm
包装尺寸: 570X510X390mm (8个装)
工作环境: 室内(10-35°)

N-X016

Three layers of four color butterfly lamp 3层四色蝴蝶灯



Technical parameters:
Working voltage: ac100-240v 50/60hz
Power: 30W
Light source: 2 pcs 10W RGBW
Color: four colors
Control mode: DMX-512, automatic, sound, master & slave
Channel mode: 8CHS
Lenses: 5*3 pcs
Working environment: indoor
Packing dimensions: 275X245X180mm
Packing size: 570X510X390mm 8 in 1

技术参数:
额定电压: AC100-240V 50/60Hz
功率: 30W
光源: 2颗10W RGBW四合一灯珠
颜色: 四色
控制方式: DMX512、声控、自走
通道模式: 8CHS
镜片: 5*3片
工作环境: 室内
包装尺寸: 275X245X180mm
包装尺寸: 570X510X390mm 8个装

N-X013A

Eight mirror butterfly light 8镜蝴蝶灯



Technical Parameters:
Working voltage: ac100-240v 50/60hz
Power: 30w
Light source: 2 10W (kori RGBW 4-1 light bulb)
Color: four colors
Control mode: DMX512, voice control, self-walk
Channel mode: 8CHS
Lenses: 8*2 pieces
Working environment: indoor
Net weight: 1.8 KG
Packing dimensions: 250X235X180mm
Packing size: 525X495X395mm

技术参数:
额定电压: AC100-240V 50/60Hz
功率: 30W
光源: 2颗10W (科瑞RGBW四合一灯珠)
颜色: 四色
控制方式: DMX512、声控、自走
通道模式: 8CHS
镜片: 8*2片
工作环境: 室内
净重: 1.8KG
包装尺寸: 250X235X180mm
包装尺寸: 525X495X395mm (8个装)



N-X050

30W colorful spotlights 30W七彩射灯

Technical Parameters:

Power Supply: AC100V-AC240V
50Hz/60Hz

Power consumption: 90w

Color: 7color+white

Light source: 1pcs 30W white

Control mode: DMX-512, automatic,
sound

技术参数:

电源供应: AC100-240V, 50Hz~60Hz

额定功率: 60W光源

颜色: 7种颜色+白光

光源: 1颗30W大功率白光

运行模式: 自走模式、DMX-512模式、声控模式



N-X018

7 colors spotlight 七彩射灯

Technical Parameters:

Rated voltage: ac100-240v, 50hz-60hz

Power: 15w

Light source: 1 PCS 10W(RGBW4in1)LED

Color: seven colors

Control mode: DMX-512, automatic, sound,
master & slave

Control channel: 6 channel

Working environment: indoor

Package size: 210*182*135mm

Packing size: 425*375*560mm 20

技术参数:

额定电压: AC100-240V, 50Hz-60Hz

功率: 15W

光源: 1颗10W (RGBW4in1) LED

颜色: 七彩

控制方式: DMX512、自走、声控

控制通道: 6通道

工作环境: 室内

包装尺寸: 210*182*135mm

包装尺寸: 425*375*560mm (20个装)



N-X025/N-X025A

High-definition LOGO light 30W/50W高清LOGO灯

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 60w

LED source: 30/50W white

LOGO wheel size: 47mm

LOGO color: customized

Pattern control: 360°rotation or static

Focus: manual focus

Net weight: 1.8KG

Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 60W

光源: 30W/50W白光

LOGO片尺寸: 47mm

LOGO颜色: 定制

图案控制: 360°旋转或静止

调焦方式: 手动调焦

净重: 1.8KG

工作环境: 室内 (10-35°)



02 蜗牛系列



L001/L002

Red and Green snail laser light 红绿激光蜗牛

Technical Parameters:

Power Supply: AC100V-AC240V
50Hz/60Hz

Power consumption: 20w

Laser power: R80-150mw/650nm
G30-80mw/532nm

Laser color: Red and Green

Laser pattern: 12/16/20/40pcs (optional)

Housing: Plastic

Control mode: Automatic, sound

Working environment: indoor(10-35°)

Installation: Ceiling installation

Box size: 147X147X138mm

Master carton size: 460X460X580mm
36pcs in 1

Net weight: 0.5KG

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 20W

激光功率: 650nm红光80-150mw
532nm绿光30-80mw

激光颜色: 红色、绿色

激光图案: 12/16/20/40个 (可选)

控制方式: 自走、声控


工作环境: 室内 (10-35°)

安装方式: 吸顶

包装尺寸: 147X147X138mm

包装尺寸: 460X460X580mm (36个装)

重量: 0.5KG



L001B/L002B

Red and Blue snail laser light 红蓝激光蜗牛

Technical Parameters:

Power Supply: AC100V-AC240V
50Hz/60Hz

Power consumption: 20w

Laser power: R80-150mw/650nm
B200-1000mw/450nm

Laser pattern: 12/16/20/40pcs (optional)

Control mode: Automatic, sound

Working environment: indoor(10-35°)

Installation: Ceiling installation

Box size: 147X147X138mm

Master carton size: 460X460X580mm
36pcs in 1

Net weight: 0.5KG

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 20W

激光功率: 650nm红光80-150mw
450nm绿光200-1000mw

激光颜色: 红色、蓝色

激光图案: 12/16/20/40个 (可选)

控制方式: 自走、声控

工作环境: 室内 (10-35°)

安装方式: 吸顶

包装尺寸: 147X147X138mm

包装尺寸: 460X460X580mm (36个装)

重量: 0.5KG



全彩动画系列



F6000-909/910/917/ 920/930/940/950

RGB Animation laser 8W-50W
全彩动画激光灯8W-50W


技术参数：
 电源供应：AC90~240V, 50Hz~60Hz
 额定功率：< 350W
 激光功率：8W~50W
 激光波长：绿光：532nm 或520nm
 红光：635nm或640nm
 蓝光：450nm或457nm
 激光调制信号：模拟调制
 激光颜色：全彩色
 扫描系统：30~60kpps高速振镜扫描系统，
 控制方式：ILDA, DMX-512、声控、自走、
 主从、SD卡控（可选）
 冷却系统：风机强制冷却系统
 工作环境：室内（10-35°）
 室外（需加装温控防水外罩）

Technical Parameters:
Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 350W max
Laser Power: RGB 8W~50W
Wavelength: Green:532nm or 520nm
 Red:635nm or 640nm
 Blue:450nm or 457nm
Laser Modulation: analog modulation
Laser Color: RGB full colors
Scan System: high speed scanner 30-60kpps,
Control Mode: ILDA, DMX-512, music control,
 automatic, master & slave ,SD
 Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor



F2000-901/902/903/904/905/908/910/912/915

RGB Animation laser 1W-15W
全彩动画激光灯1W-15W



Technical Parameters:
Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 200W max
Laser Power: RGB 1W~15W
Wavelength: Green 532nm or 520nm Red
 655nm/635nm/638nm/640nm Blue 450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB
Scan System: high speed scanner 30-60kpps,
Control Mode: ILDA, DMX-512, music control,
 automatic, master & slave ,SD
 Card control (optional)
Cool System: fan
Operating Environment: 10~35°indoor

技术参数：
 电源供应：AC90~240V, 50Hz~60Hz
 额定功率：< 200W
 激光功率：1W~15W
 激光波长：绿光：532nm 或520nm
 红光：655nm或635nm或638nm或640nm
 蓝光：450nm
 激光调制信号：模拟调制或TTL调制
 激光颜色：全彩色
 扫描系统：30~60kpps高速振镜扫描系统，
 控制方式：ILDA, DMX-512、声控、自走、
 主从、SD卡控（可选）
 冷却系统：风机强制冷却系统
 工作环境：室内(10~35°)

F4-901/902/903/904/905/908/910

RGB Animation laser 1W-10W
全彩动画激光灯1W-10W




Technical Parameters:
Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 100W max
Laser Power: RGB 1W~10W
Wavelength: Green 532nm or 520nm
 Red 650nm/635nm or 638nm, Blue 450nm
Laser Modulation: analog modulation or TTL
Laser Color: RGB
Scan System: 15-30kpps vibratory mirror system,
Laser Patterns: 128PCS
Control Mode: ILDA, DMX-512, music control
 automatic, master & slave ,SD
 Card control (optional)
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 530*390*280mm
Gross Weight: 16KG max

技术参数：
 电源供应：AC90~240V, 50Hz~60Hz
 额定功率：< 100W
 激光功率：1W~10W
 激光波长：绿光：532nm 或520nm、
 红光：650nm或635nm或638nm、
 蓝光：450nm
 激光调制信号：模拟调制或TTL调制
 激光颜色：全彩色
 扫描系统：15~30kpps振镜扫描，
 激光图案：128幅激光效果图案
 控制方式：ILDA, DMX-512、声控、自走、
 主从、SD卡控（可选）
 冷却系统：风机强制冷却系统
 工作环境：室内(10~35°)
 纸箱包装尺寸：530*390*280mm
 毛重：< 16KG

NF810/820/830/850

RGB Animation Laser 1W~5W
全彩动画激光灯1W~5W




Technical Parameters:
Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 100W max
Laser Power: RGB 1W~5W
Laser Color: Green 532nm or 520nm,
 Red 650nm/638nm, Blue 450nm
Scan System: 30kpps vibratory mirror system
Control Mode: ILDA, DMX-512, music control,
 automatic, master & slave
Control Channel: 12
Cool System: fan
Operating Environment: 10~35°indoor
Packing Size: 415×335×340mm
Gross Weight: 15KG max

技术参数：
 电源供应：AC90~240V, 50Hz~60Hz
 额定功率：< 100W
 激光功率：RGB 1W~5W
 激光颜色：绿色532nm或520nm、蓝光：450nm、
 红光：650nm或638nm
 激光调制信号：模拟调制或TTL调制
 激光颜色：全彩
 扫描系统：30kpps振镜扫描
 控制方式：ILDA, DMX-512、声控、自走、主从
 控制通道：12
 工作环境：室内(10~35°)
 包装尺寸：415×335×340mm
 毛重：< 15KG

F2730/2740/2780/2800

RGB full color laser F2全彩激光

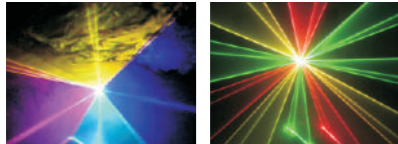

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 400MW-1200MW
Wavelength: G:532nm/520nm, R:650nm/638nm, B:450nm
Laser modulation: TTL modulation
Scan system: 15-20Kpps
Scan angle: ±25°
Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control(optional)
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 400MW-1200MW
激光波长: 绿光: 532nm或520nm 红光: 650nm 或638nm 蓝光: 450nm
调制信号: TTL调制
扫描系统: 15-20kpps振镜
扫描角度: ±25°
控制方式: DMX-512、声控、自走、主从、APP控制 (可选)
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装

FS-730/740/780/800/860/900

SD Card RGB full color laser SD卡七彩动画激光



Technical Parameters:


Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 400MW-2000MW
Wavelength: G:532nm/520nm, R:650nm/638nm, B:450nm
Laser modulation: TTL modulation
Color: RGB
Scan system: 15-20Kpps
Scan angle: ±25°
Control mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control (optional)
Cooling system: fans
Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 400MW-2000mw
激光波长: 绿光: 532nm或520nm 红光: 650nm 或638nm 蓝光: 450nm
调制信号: TTL调制
激光颜色: 全彩色
扫描系统: 15-20kpps振镜
扫描角度: ±25°
控制方式: ILDA、DMX-512、声控、自走、主从、SD卡控 (可选)
冷却系统: 风机强制冷却
工作环境: 室内 (10-35°)

F3730/3740/3780/3800/3860/3900

RGB full color laser F3全彩激光

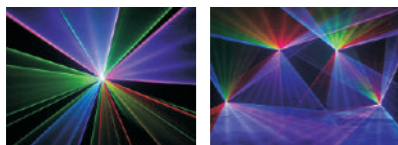


Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 400mw-2000mw
Wavelength: G:532nm/520nm, R:650nm/638nm, B:450nm
Laser modulation: TTL modulation
Color: RGB
Scan system: 15-20Kpps
Scan angle: ±25°
Control mode: DMX-512, automatic, master & slave, sound, master & slave, APP control (optional)
Cooling system: fans
Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 400mw-2000mw
激光波长: 绿光: 532nm或520nm 红光: 650nm 或638nm 蓝光: 450nm
调制信号: TTL调制
激光颜色: 全彩色
扫描系统: 15-20kpps振镜
扫描角度: ±25°
控制方式: DMX-512、声控、自走、主从、APP控制 (可选)
冷却系统: 风机强制冷却
工作环境: 室内 (10-35°)

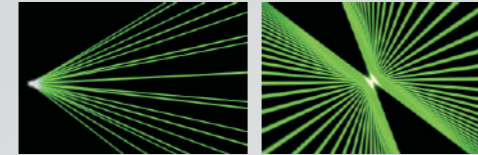

04 单色动画激光系列

F2000-681/682/685 690/695/698/699

Green Animation Laser 1W~30W 单绿激光灯1W~30W

技术参数:


电源供应: AC90~240V, 50Hz~60Hz
额定功率: <1000W
激光功率: 1W~30W
激光波长: 绿光: 532nm或520nm
激光调制信号: 模拟调制或TTL调制0~20K
扫描系统: 30-60kpps高速振镜扫描系统
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制 (可选)
冷却系统: 风机强制冷却系统
工作环境: 室内 (10~35)

Technical Parameters:

Power Supply: AC90~240V, 50Hz~60Hz
Power Consumption: 1000W max
Laser Power: 1W~30W
Wavelength: Green:532nm/520nm
Laser Modulation: analogue modulation or 0~20K TTL modulation
Laser Color: Green
Scan System: high speed scanner30~60kpps
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Cool System: fan
Operating Environment: 10~35°indoor

F4-675/681/682/683/685

Green Animation Laser 500mw~5W 单绿动画激光500mw~5W

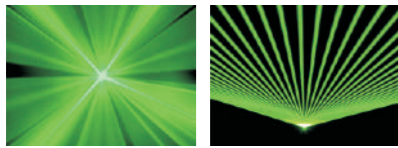

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 2000W max
Laser Power: 500MW~5W
Laser Source: solid semiconductor laser generator
Wavelength: 532nm or 520nm
Laser Modulation: analogue modulation or 0~20K TTL modulation
Laser Color: Green
Scan System: 15~40kpps high speed scanner
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control (optional)
Cool System: fan
Operating Environment: 10~35° indoor
Packing Size: 530*390*280mm
Gross Weight: 13KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 200W
激光功率: 500mw-5W
激光颜色: 翠绿色
激光波长: 绿光: 532nm或520nm
激光调制信号: TTL调制0~20K
激光颜色: 翠绿色
扫描系统: 15-40kpps振镜扫描, 扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
控制通道: 12或25个
冷却系统: 风机强制冷却系统
工作环境: 室内(10~35°)
包装尺寸: 530*390*280mm
毛重: < 13KG

NF-653/655/660/662/665

Green Animation Laser 300mw~5W 单绿动画激光300mw~5W



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 80W max
Laser Power: 300mw-5W
Laser Color: Green (532nm或520nm)
Scan System: 30kpps vibratory mirror system,
Laser Patterns: 128pcs
Control Mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control(optional)
Control Channel: 12 or 25
Operating Environment: 10~35° indoor
Packing Size: 415 x 335 x 340mm,
Gross Weight: 16KG max

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
额定功率: < 80W
激光功率: 300mw-5W
激光颜色: 翠绿色(532nm或520nm)
扫描系统: 25kpps振镜扫描, 扫描角度: ±20度
激光图案: 128幅激光效果图案
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制(可选)
控制通道: 12或25个
工作环境: 室内(10~35°)
包装尺寸: 415 x 335 x 340mm
毛重: 16KG

FS-606/610/620/650/670/310/320/330/310/260

SD Card laser SD卡单色激光



Technical Parameters:


Power Supply: AC100V-AC240V,50Hz/60Hz
Power consumption: 60W
Laser diode: 60mw-3000mw
Wavelength: G532nm/520nm, R650nm/638nm, B450nm
Laser modulation: TTL modulation
Color: R/G/B
Scan system: 15-20Kpps
Control mode: ILDA, DMX-512, music control, automatic, master & slave, SD Card control
Cooling system: fans
Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 60mw-3000mw
激光波长: 绿光: 532nm或520nm
 红光: 650nm或638nm、蓝光: 450nm
调制信号: TTL调制
激光颜色: 绿或蓝或红
振镜速度: 15-30KPPS
控制方式: ILDA, DMX-512, 声控、自走、主从、SD卡控制
冷却系统: 风机强制冷却
工作环境: 室内(10-35°)

F2606/F2610/F2615/F2650/F2660

Green phone APP control laser light 单绿手机APP激光

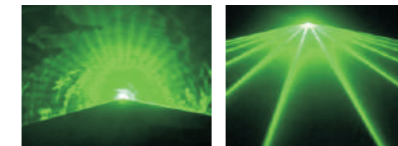

Technical Parameters:


Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 60mw/100mw/150mw
Wavelength: G532nm/520nm
Laser modulation: TTL modulation
Color: Green
Scan system: 15-20Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: ILDA, DMX-512, automatic, master & slave, sound, master & slave, APP control
Control channel: 5 or 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 60mw/100mw/150mw
激光波长: 绿光: 532nm或520nm
调制信号: TTL调制
激光颜色: 单绿色
扫描系统: 15-20kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组可存255个, 总共可存3825个图案
控制方式: ILDA, DMX-512, 声控、自走、主从、APP控制
冷却系统: 风机强制冷却
通道模式: 5或34通道
工作环境: 室内(10-35°)
净重: 1.8KG
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装

F2305/F2308/F2310/F2320/F2330/F2350

Blue phone APP control laser light 单蓝手机APP激光



Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz
Power consumption: 60W
Laser diode: 500mw-5000mw
Wavelength: 450nm
Laser modulation: TTL modulation
Color: Blue
Scan system: 15-20Kpps
Scan angle: ±25°
Laser pattern: 15groups storage, more than 3800 patterns
Control mode: ILDA, DMX-512, automatic, master & slave, sound, master & slave, APP control
Control channel: 5 or 34CHs
Cooling system: fans
Working environment: indoor (10-35°)
Net weight: 1.8KG
Box size: 275X210X185mm
Master carton size: 575X440X395mm 8pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz
功率: 60W
激光功率: 500mw-5000mw
激光波长: 蓝光450nm
调制信号: TTL调制
激光颜色: 单蓝色
扫描系统: 15-20kpps振镜
扫描角度: ±25°
激光图案: 15组图案库, 每组可存255个, 总共可存3825个图案
控制方式: ILDA, DMX-512, 声控、自走、主从、APP控制
冷却系统: 风机强制冷却
通道模式: 5或34通道
净重: 1.8KG
包装尺寸: 275X210X185mm
包装尺寸: 575X440X395mm 8个装

05 光栅效果激光系列



F1666/F1667

6D grating effect laser light
六维动画光栅

技术参数：

工作电压：AC100-240V 50/60Hz

功率：40W

激光功率：532nm绿光60~80mw、638nm
红光100~300mw、450nm
蓝光100~1000mw

激光颜色：红绿蓝或红绿

扫描系统：15kpps振镜

激光图案：15组图案库，达10000多个图案，包含
3D、光栅等5组效果

控制方式：DMX-512、声控、自走、主从、摇控、
手机APP（可选）

冷却系统：风机强制冷却

通道模式：34CHS

净重：1.8KG

包装尺寸：345X290X165mm

包装尺寸：905X370X315mm 5个装

工作环境：室内（10-35°）

Technical Parameters:

Technical Parameters: Power Supply: AC100V-
AC240V, 50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm, R100~300mw/
638nm, B100~1000mw/450nm

Color: RGB or RG

Scan system: 15Kpps

Scan angle: $\pm 25^\circ$

Laser pattern: 15 groups storage, more than 10,000
patterns including 3D, Grating effects

Control mode: DMX-512, automatic, master & slave,
sound, master & slave, remote control
APP control (optional)

Control channel: 5 or 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 345X290X165mm

Master carton size: 905X370X315mm 5pcs in 1



F1645/1645A/1645B

RGB/RG/RB 5D Twin Effects
RGB/RG/RB 5维流花台

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm, R100~300mw/
638nm, B100~1000mw/450nm

Color: RGB or RG

Scan system: 15Kpps

Scan angle: $\pm 25^\circ$

Laser pattern: 128PCS including 3D Grating
effects

Control mode: DMX-512, automatic, master
& slave, sound, master & slave,
remote control

Control channel: 23CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 345X290X165mm

Master carton size: 905X370X315mm 5pcs in 1

技术参数：

工作电压：AC100-240V 50/60Hz

功率：40W

激光功率：532nm绿光60~80mw、638nm
红光100~300mw、450nm
蓝光100~1000mw

激光颜色：红绿蓝或红绿

扫描系统：15kpps振镜

激光图案：128个包含3D、光栅等5种效果

控制方式：DMX-512、声控、自走、主从、摇控

冷却系统：风机强制冷却


通道模式：23CHS

净重：1.8KG

包装尺寸：345X290X165mm

包装尺寸：905X370X315mm 5个装

工作环境：室内（10-35°）



F1643A/1643

RGB 5D Twin Effects RGB
RGB五维流花台

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm, R100~300mw/
638nm, B100~1000mw/450nm

Color: RGB seven color

Scan system: 15Kpps

Scan angle: $\pm 25^\circ$

Laser pattern: 128PCS including 3D, Grating
effects

Control mode: DMX-512, automatic, master
& slave, sound, master & slave,
remote control

Control channel: 23CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 345X290X165mm

Master carton size: 905X370X315mm 5pcs in 1

技术参数：

工作电压：AC100-240V 50/60Hz

功率：40W

激光功率：532nm绿光60mw-80mw、638nm
红光100mw-300mw、450nm
蓝光100mw-1000mw

激光颜色：RGB七彩

扫描系统：15kpps振镜

激光图案：128个包含3D、光栅等5种效果

控制方式：DMX-512、声控、自走、主从、摇控

冷却系统：风机强制冷却


通道模式：23CHS

净重：1.8KG

包装尺寸：345X290X165mm


包装尺寸：905X370X315mm 5个装

工作环境：室内（10-35°）

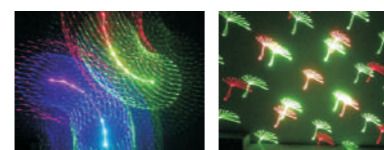

F2250/F2220

RGB/RB Twin effect laser light RGB/RB 流花亭



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm,R100~300mw/
638nm,B100~1000mw/450nm

Color: RGB or RB

Scan system: 15Kpps

Scan angle: ±25°

Laser pattern: 15groups storage, more than
3800 patterns

Control mode: DMX-512, automatic, master
& slave, sound, master & slave,
remote control

Control channel: 5 or 34CHs

Cooling system: fans

Working environment: indoor (10-35°)

Net weight: 1.8KG

Box size: 345X290X165mm

Master carton size: 905X370X315mm 5pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、638nm
红光100~300mw、450nm
蓝光100~1000mw

激光颜色: 红绿蓝或红蓝

扫描系统: 15kpps振镜

激光图案: 15组图案库, 每组可存255个, 总共
可存3825个图案

控制方式: DMX-512、声控、自走、主从、摇控

冷却系统: 风机强制冷却

通道模式: 5或34通道

净重: 1.8KG

包装尺寸: 345X290X165mm

包装尺寸: 905X370X315mm 5个装

工作环境: 室内 (10-35°)

F1001

RG/RB Cat eye 红绿/红蓝节日猫



Technical Parameters:

Power Supply: AC90~240V

Power Consumption: 20W

Laser Power: Green (532nm) 50mw / Red
(650nm) 100mw

Blue(450nm)200mw-1000mw

Laser Color: green & red

Scan System: 15kpps vibratory mirror system

Laser Patterns: 128pcs

Control Mode: music control, automatic

Operating Environment: 10~35°indoor

技术参数:

电压供应: AC90~240V

额定功率: 20W

激光功率: 绿光50mw/532nm, 红光100mw/650nm
蓝光200mw-1000mw/450nm

激光颜色: 红色、翠绿色


扫描系统: 15kpps振镜扫描

激光图案: 内置新年、复活节、情人节、万圣节、圣
诞节、婚礼、生日、图案等八套节目。

控制方式: 声控、自走

F1250/F1230/F1210

RGB/RB/RG Twin Effects RGB/RB/RG流花台



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm,R100~300mw/
638nm,B100~1000mw/450nm

Color: RGB or RB or RG

Scan system: 15Kpps

Laser pattern: 128 pcs patterns

Control mode: DMX-512, automatic, sound,
master & slave

Cooling system: fans

Control channel: 22CHs

Net weight: 2.4KG

Box size: 345X290X165mm

Master carton size: 910X370X320mm
5pcs in 1

Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 30W

激光功率: 532nm绿光60~80mw、638nm
红光100~300mw、450nm
蓝光100~1000mw

激光颜色: 红绿蓝或红蓝或红绿

扫描系统: 15kpps振镜

激光图案: 128组图案库

控制方式: DMX-512、声控、自走、主从

冷却系统: 风机强制冷却

通道模式: 22CHS

净重: 2.4KG

包装尺寸: 345X290X165mm

包装尺寸: 910X370X320mm (5支/箱)

工作环境: 室内 (10-35°)

总重量: 13.5KG

F2001/F2002/F2003

Festival cat laser light 节日灯



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power consumption: 40W

Laser diode: G60~80mw/532nm,R100~300mw/
638nm,B100~1000mw/450nm

Color: RG or RB or RGB

Scan system: 15Kpps

Laser pattern: 15groups storage, more than
3800 patterns

Control mode: DMX-512, automatic, master
& slave, sound, master & slave, remote control,
APP control (optional)

Control channel: 5 or 34CHs

Cooling system: fans

Net weight: 1.8KG

Box size: 275X210X185mm

Master carton size: 575X440X395mm
8pcs in 1

Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、638nm
红光100~300mw、450nm
蓝光100~1000mw

激光颜色: 红绿/红蓝/红绿蓝

扫描系统: 15kpps振镜

激光图案: 15组图案库, 每组可存255个, 总共可存
3825个图案

通道模式: 5或34通道

控制方式: DMX-512、声控、自走、主从、摇控、
手机APP(可选)


冷却系统: 风机强制冷却

净重: 1.8KG

包装尺寸: 275X210X185mm

包装尺寸: 575X440X395mm 8个装

工作环境: 室内 (10-35°)



F099A/F099B/F099C/F199D/F099E/F099G

MINI RG Firefly/2 in 1/4 in 1/6 in 1/8 in 1/12 in 1/20 in 1/grating laser
红绿萤火虫/2合一/4合一/6合一/8合一/12合一/20合一迷你激光


Technical Parameters:	技术参数:
Firefly Technical Parameters:	电源供应: AC110V / AC230V, 50Hz~60Hz
Power Supply: AC110V / AC230V, 50Hz~60Hz	额定功率: 20W
Power Consumption: 20W	激光功率: 532nm绿光 40mw 650nm红光100mw
Laser Power: Green (532nm) 40mw / Red (650nm) 100mw	激光颜色: 红色、绿色
Laser Color: green & red	控制方式: 自走、声控
Control Mode: music control, automatic	



F203/F206

RB/RG Laser Waster Effect Light
红绿/红蓝激光炫影


Technical Parameters:	技术参数:
Power Supply: AC100V-AC240V, 50Hz/60Hz	工作电压: AC100-240V 50/60Hz
Power Consumption: 20W	功率: 20W
Laser Diode: G532nm/60-80mw R100-150mw/650nm B200-10000mw/450nm	激光功率: 532nm绿光60-80mw、650nm 红光100-150mw、450nm 蓝光200-1000mw
Laser Color: RB or RG	激光颜色: 红蓝或红绿
Control Mode: DMX-512, automatic, sound	控制方式: DMX-512、声控、自走
Working Environment: indoor (10-35°)	工作环境: 室内 (10-35°)



F1208/F1208A

RB 16/20 in 1 grating laser
红蓝16合一/20合一

Technical Parameters:	技术参数:
Power Supply: AC110V / AC230V, 50Hz~60Hz	电源供应: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 20W	额定功率: 20W
Laser Power: Red (650nm) 100~150mw / Blue(450nm)200~1000mw	激光功率: 650nm红光100-150mw, 450nm 蓝色200-1000mw
Laser Color: red & blue	激光颜色: 红色和蓝色
Laser Patterns: 16/20pcs	激光图案: 16/20个
Control Mode: music control, automatic	控制方式: 声控、自走
Operating Environment: 10~35°indoor	工作环境: 室内 (10~35°)
Inner Packing Size: 265×180×100mm	内包尺寸: 265×180×100mm
Gross Weight: 1.25 KG	毛重: 1.25KG
Packing Size: 530×280×390mm(10 pcs)	外包尺寸: 530×280×390mm (10个/箱)
Total weight: 13KG	总重量: 13KG



F1209/F1209A

RG 16/20 in 1 grating laser
红绿16合一/20合一

Technical Parameters:	技术参数:
Power Supply: AC110V / AC230V 50Hz~60Hz	电源供应: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 20W	额定功率: 20W
Laser Power: Red (650nm) 100~150mw / Green(450nm)50mw	激光功率: 650nm红光100~150mw 532nm绿色50mw
Laser Color: red & green	激光颜色: 红色和绿色
Laser Patterns: 16 /20pcs	激光图案: 16/20个
Control Mode: music control, automatic	控制方式: 声控、自走
Operating Environment: 10~35°indoor	工作环境: 室内(10~35°)
Inner Packing Size: 265×180×100mm	内包尺寸: 265×180×100mm
Gross Weight: 1.25 KG	毛重: 1.25KG
Packing Size: 530×280×390mm(10 pcs)	外包尺寸: 530×280×390mm (10个/箱)
Total weight: 13KG	总重量: 13KG

F1316/1316B/F1212/F1312B

RG/RB 16 in 1/12 in 1 grating laser
红绿/红蓝16合一/12合一



Technical Parameters:	技术参数:
Power Supply: AC110V / AC230V, 50Hz~60Hz	电源供应: AC110V / AC230V, 50Hz~60Hz
Power Consumption: 20W	额定功率: 20W
Laser Power: Red (650nm) 100~150mw / Green(450nm)50mw	激光功率: 650nm红光100~150mw 532nm绿色50mw 450nm200-1000mw
Laser Color: red & green red & blue	激光颜色: 红色和绿色或者红色和蓝色
Laser Patterns: 16 /12pcs	激光图案: 16/12个
Control Mode: music control, automatic	控制方式: 声控、自走
Operating Environment: 10~35°indoor	工作环境: 室内(10~35°)
Inner Packing Size: 265×180×100mm	内包尺寸: 265×180×100mm
Gross Weight: 1.25 KG	毛重: 1.25KG
Packing Size: 530×280×390mm(10 pcs)	外包尺寸: 530×280×390mm (10个/箱)
Total weight: 13KG	总重量: 13KG

步进电机激光系列

F0971/F0972

Green Rain Curtain
单绿扫描激光雨

技术参数：

电源供应：AC110V /AC230V, 50Hz~60Hz

额定功率：<50W

激光功率：60mw、100mw

激光颜色：翠绿色（532nm）

扫描系统：高精度步进电机扫描系统,大角度扫描

控制方式：DMX-512、自走、声控

控制通道：8个DMX-512信号通道

工作环境：室内（10~35°）

内包尺寸：360×290×185mm

毛重：2.25KG

外包尺寸：905×300×260（5 pcs）（5个/箱）

总重量：12.5KG

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ

Power Consumption: 60W max

Laser Power: 60mw/100mw
green (532nm)

Laser Color: Blue or Red

Scan System: Micro-step motor scanner
big angle scanning

Control Mode: DMX-512, music control
automatic

Control Channel: 8


Operating Environment: 10~35°indoor

Inner Packing Size: 360×290×185mm

Gross Weight: 2.25KG

Packing Size: 905×300×260 (5 pcs)

Total weight: 12.5KG

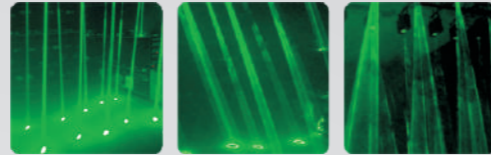

F0536/F0538/F0453/F0455/F0459

Green/Blue Animation Motor Laser
单绿/单蓝电动画激光灯

Technical Parameters:

Power Supply: AC110V /AC230V
50HZ~60HZ

Power Consumption: 30W max

Laser Power: G:60mw/100mw,B:200-1000mw

Laser Color: green (532nm) blue(450nm)

Scan System: Micro-step motor scanner
big angle scanning

Control Mode: music control, automatic

Operating Environment: 10~35°indoor

Inner Packing Size: 360×290×185mm

Gross Weight: 2.25KG

Packing Size: 905×300×260 (5 pcs)

Total weight: 12.5KG

技术参数：

电源供应：AC110V /AC230V, 50Hz~60Hz

额定功率：<30W

激光功率：绿60mw/100mw 蓝200-1000mw

激光颜色：绿色（532nm）蓝色（450nm）

扫描系统：高精度步进电机扫描系统,大角度扫描

控制方式：自走、声控


工作环境：室内(10~35°)

内包尺寸：360×215×100

毛重：2.25KG

外包尺寸：905×300×260 (5个/箱)

总重量：12.5KG



F0973/F0975/F0978/F0979

Blue/Red Rain Curtain
蓝色/红色扫描激光雨

Technical Parameters:

Power Supply: AC110V /AC230V, 50HZ~60HZ

Power Consumption: 60W max

Laser Power: Blue(450nm)300mw/500mw/1000mw
Red(638nm)100~500w

Laser Color: Blue or Red

Scan System: Micro-step motor scanner, big
angle scanning

Control Mode: DMX-512, music control
automatic

Control Channel: 8

Operating Environment: 10~35°indoor

Inner Packing Size: 360×290×185mm

Gross Weight: 2.25KG

Packing Size: 905×300×260 (5 pcs)

Total weight: 12.5KG

技术参数：

电源供应：AC110V /AC230V, 50Hz~60Hz

额定功率：<60W

激光功率：450nm蓝：300mw/500mw/1000mw
638nm红：100~500mw

激光颜色：蓝色或红色

扫描系统：高精度步进电机扫描系统,大角度扫描

控制方式：DMX-512、自走、声控

控制通道：8个DMX-512信号通道


工作环境：室内(10~35°)

内包尺寸：360×290×185mm

毛重：2.25KG


外包尺寸：905×300×260 (5 pcs) (5个/箱)

总重量：12.5KG



F1088/F1086

Motor grating effect laser light 单头电机扫描光栅



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power Consumption: 40W

Laser Diode: G60~80mw/532nm,R100~300mw/638nm,B100~1000mw/450nm

Laser Color: RGB or RG

Scan System: 1.8°step motor scanning

Laser Pattern: 25

Grating Effect: stars group

Control Mode: DMX-512, automatic master & slave, sound

Control Channel: 10CHs

Cooling System: fans

Working Environment: indoor (10-35°)

Net Weight: 1.8KG

Box Size: 345X290X165mm

Master Carton Size: 905X370X315mm
5pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、638nm
红光100~300mw、450nm

蓝光100~1000mw

激光颜色: 红绿蓝或红绿

扫描系统: 1.8°高精度步进电机扫描

激光图案: 25个

光栅效果: 满天星组合

控制方式: DMX-512、声控、自走

冷却系统: 风机强制冷却

通道模式: 10CHS

净重: 1.8KG


包装尺寸: 345X290X165mm

包装尺寸: 905X370X315mm 5个装

工作环境: 室内 (10-35°)

F1080/F1082

Motor 5D grating effect laser light 电机五维光栅



Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power Consumption: 40W

Laser Diode: G60~80mw/532nm, R100~300mw/638nm, B100~1000mw/450nm

Laser Color: RGB or RG

Scan System: 1.8°step motor scanning

Laser Pattern: 150 patterns including the grating effect group

Control Mode: DMX-512, automatic master & slave, sound

Control Channel: 10CHs

Cooling System: fans

Working Environment: indoor (10-35°)

Net Weight: 1.8KG

Box size: 345X290X165mm

Master carton size: 905X370X315mm
5pcs in 1

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、638nm
光100~300mw、450nm蓝光100~1000mw

激光颜色: 红绿蓝或红绿

扫描系统: 1.8°高精度步进电机扫描

激光图案: 150个 包含光栅组合效果

控制方式: DMX-512、声控、自走

冷却系统: 风机强制冷却

通道模式: 10CHS

净重: 1.8KG


包装尺寸: 345X290X165mm

包装尺寸: 905X370X315mm 5个装

工作环境: 室内 (10-35°)

F1033/F1034

3Heads Motor grating effect laser light 三头电机扫描光栅



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power Consumption: 40W

Laser Diode: G60~80mw/532nm, R100~300mw/638nm, B100~1000mw/450nm

Laser Color: RGB or RG

Scan System: 1.8°step motor scanning

Laser Pattern: 25

Grating Effect: stars group

Control Mode: DMX-512, automatic, master & slave, sound

Control Channel: 10CHs

Cooling System: fans

Working Environment: indoor (10-35°)

Net Weight: 4KG

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、638nm
红光100~300mw、450nm蓝光100~1000mw

激光颜色: 红绿蓝或红绿

扫描系统: 1.8°高精度步进电机扫描

激光图案: 25个

光栅效果: 满天星组合

控制方式: DMX-512、声控、自走

冷却系统: 风机强制冷却


通道模式: 10CHS

净重: 4KG

工作环境: 室内 (10-35°)

F1066B/1066C

5/4 Coulor Four Head Light 五彩/四色缤纷激光灯



Technical Parameters:

Power Consumption: 50W

Laser Power: Green(532nm)60mw, Red (650nm)150mw×1+100mw×2,Purple (405nm)100mw/Green(532nm)60mw,Red (650nm)100mw×2,Blue(450nm)100-300mw

Laser Color: green & red & purple & yellow & fuchsiue or RGBY

Scan System: Micro-step motor scanner, big angle scanning

Control Mode: DMX-512, music control, automatic

Control Channel: 5

Operating Environment: 10~35°indoor

Inner Packing Size: 700×250×180mm

Gross Weight: 5.3KG

Packing Size: 720×530×410mm (4 pcs)

Total weight: 23.5KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz

额定功率: 50W

激光功率: 532nm绿光60mw、650nm红光 (150mw*1+100mw*2)、405nm紫光100mw 或者532nm绿60mw、650nm红光150mw*2、450nm蓝光200-300mw

激光颜色: 绿色、红色、紫色、黄、品红或绿色、红色、蓝色、黄色、

扫描系统: 高精度步进电机扫描系统,大角度扫描

控制方式: DMX-512、自走、声控

控制通道: 5个

工作环境: 室内(10~35°)

内包尺寸: 700×250×180mm


内包毛量: 5.3KG

外包尺寸: 720×530×410mm (4个/箱)

外包毛重: 23.5KG

F1066

Red & Green Four Head Laser Light 红绿四头激光



Technical Parameters:

Power Supply: AC110V/AC230V, 50Hz~60Hz

Power Consumption: 30W

Laser Power: Green(532nm)60mw/ Red(650nm)100mw*2

Laser Color: green & red

Scan System: Micro-step motor scanner, big angle scanning

Control Mode: DMX-512, music control, automatic

Control Channel: 5

Operating Environment: 10~35°indoor

Inner Packing Size: 700×250×180mm,

Gross Weight: 4.7KG

Packing Size: 720×530×410mm (4 pcs)

Total weight: 20.5KG

技术参数:

电源供应: AC110V/AC230V, 50Hz~60Hz

额定功率: 30W

激光功率: 532nm绿60mw、650nm红100mw*2

激光颜色: 绿色、红色

扫描系统: 高精度步进电机扫描系统,大角度扫描

控制方式: DMX-512、自走、声控

控制通道: 5个

工作环境: 室内(10~35°)

内包尺寸: 700×250×180mm


内包毛量: 4.7KG

外包尺寸: 720×530×410mm (4个/箱)

外包毛重: 20.5KG

F1022/F1022D

Double Head Laser Light 双头红绿/单蓝双头激光

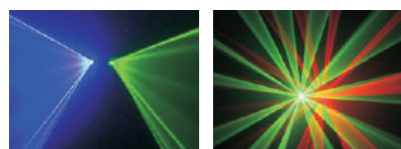

Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power Consumption: 40W

Laser diode: G60~80mw/ 532nm, R100~150mw/650nm or R100~300mw/638nm, B100~1000mw/450nm

Laser Color: Green or Blue or RGB

Scan System: 1.8°step motor scanning

Laser Pattern: 25 PCS

Control Mode: DMX-512, automatic, master & slave, sound

Control Channel: 10CHs

Cooling System: fans

F2022/F2023

Double Head RGB Laser Light RGB 全彩双头激光

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw、650nm红光(100~150mw)或638nm红光100~300mw、450nm蓝光100~1000mw

激光颜色: 红绿或蓝色或红绿蓝

扫描系统: 1.8°高精度步进电机扫描

激光图案: 25个


控制方式: DMX-512、声控、自走

通道模式: 10CHS

冷却系统: 风机强制冷却

F2066/F2067

RGB Four Head Laser Light RGB全彩四头激光



Technical Parameters:

Power Supply: AC100V-AC240V,50Hz/60Hz

Power Consumption: 40W

Laser diode: G60~80mw/ 532nm×2, R100~300mw/638nm×2, B100~1000mw/450nm×2

Laser Color: RGB

Scan System: 1.8°step motor scanning

Laser Pattern: 25 PCS

Control Mode: DMX-512, automatic, master & slave, sound

Control Channel: 10CHs

Cooling System: fans

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 40W

激光功率: 532nm绿光60~80mw×2、638nm红光100~300mw×2、450nm蓝光100~1000mw×2

激光颜色: 红绿蓝

扫描系统: 1.8°高精度步进电机扫描

激光图案: 25个

控制方式: DMX-512、声控、自走

通道模式: 10CHS

冷却系统: 风机强制冷却

07 激光光束系列

N-Y005/Y007/Y008

8Eyes laser moving head light 8眼摇头激光帘

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 120W

光源: 红光100-500mw/ 绿光50-100mw / 蓝光100--1000mw

激光波长: 绿光: 532nm 红光: 638nm、 蓝光: 450nm

控制方式: DMX-512、声控、自走、主从

光束效果: 跑马、彩虹流水、交替、频闪

通道模式: 6CHS、14CHS

Y轴角度: 垂直180度

包装尺寸: 1150X160X250mm

包装尺寸: 1165X3450X525mm 4个装

净重: 7.5KG

工作环境: 室内(10-35°)

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 120w

Laser diode: R100-500mw/638nm G50-100mw/532nm, B100-1000mw/450nm

Color: RGB, Green or Blue

Beam effect: jumping, rainbow effect, exchange, strobe

Control mode: DMX-512, automatic, master & slave, sound

Control channel: 6/14CHs



Yaxis angle: Tilt 180°

Working environment: indoor (10-35°)

Net weight: 7.5KG

Box size: 1150X160X250mm

Master carton size: 1165X3450X525mm 4pcs in 1

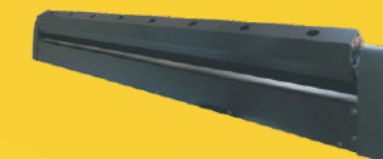

FY-666/FY-632

Spider Laser Beam RGB (Single Green) Moving Light RGB/单绿激光摇头蜘蛛灯

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 120W

光源: 红光300mw*2/绿光80mw*4 / 蓝光500mw*2

激光波长: 绿光: 532nm 红光: 638nm、 蓝光: 450nm

颜色: 红绿蓝或绿色

控制方式: DMX-512、声控、自走、主从

光束效果: 跑马、彩虹流水、交替、频闪

通道模式: 13CHS/16CHS/20CHS

X轴角度: 水平540度

Y轴角度: 垂直180度

净重: 8.5KG

工作环境: 室内(10-35°)

Technical Parameters:

Power Supply: AC100V-AC240V, 50Hz/60Hz

Power consumption: 120w

Laser diode: R300mw*2/G80mw*4/B500mw*2

Color: RGBorGreen

Beam effect: jumping, rainbow effect, exchange, strobe

Control mode: DMX-512, automatic, master & slave, sound

Control channel: 13CHS/16CHS/20CHS

Pan/Tilt: X axis 540°, Y axis 180°

Net weight: 8.5KG

Working environment: indoor (10-35°)





F020-06/03/12

Green/Blue/Red Ceiling Laser Curtain 单绿/单蓝/单红吸顶激光雨帘

Technical Parameters:

Power Supply: AC 100-240V 50/60Hz

Power Consumption: 10W max

Laser Power: Green:80mw/515/532nm,

Blue:100-500mw/450nm,

Red:100-300mw/638nm

Control Mode: TTL modulation

Operating Environment: 10-35°indoor

技术参数:

电源供应: AC100-240V/50~60Hz,

功率: 10W

激光功率: 绿光: 80mw/515/532nm


蓝光: 100-500mw/450nm

红光: 100-300mw/638nm

激光颜色: 绿色、蓝色、红色

控制模式: TTL调制

使用环境: 室内 (10-35°)

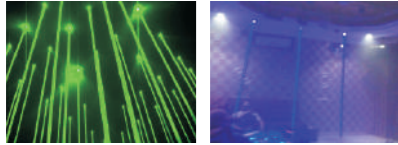

F010-06/03/12

Green/Blue/Red Laser Curtain 单绿/单蓝/单红激光雨帘

Technical Parameters:

Power Supply: AC 100-240V 50/60Hz

Power Consumption: 10W max

Laser Power: Green:80mw/515/532nm

Blue:100-500mw/450nm

Red:100-300mw/638nm

Control Mode: TTL modulation

Operating Environment: 10-35°indoor

技术参数:

电源供应: AC100-240V/50~60Hz,

功率: 10W

激光功率: 绿光: 80mw/515/532nm


蓝光: 100-500mw/450nm

红光: 100-300mw/638nm

激光颜色: 绿色、蓝色、红色

控制模式: TTL调制

使用环境: 室内 (10-35°)

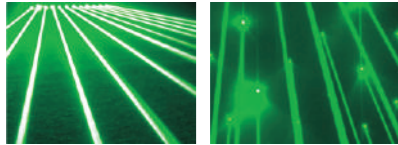

F021

Laser curtain control box 激光雨帘控制器

Technical Parameters:

Power Supply: AC 100-240V 50/60Hz

Power Consumption: 30W

Control Loop: 16

Control Mode: DMX-512, Auto, Stund

Control Channel: 10CHs

DMX Access Way: RJ45/RL3Pin cannon

Net Weight: 0.5KG

Control Connect way: DB25OUT

Operating Environment: 10-35°indoor

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 30W

控制回路: 16路

控制方式: DMX-512, 声控、自走

冷却系统: 风机冷却

通道模式: 10CHS

DMX接入方式: RJ45/RL3Pin卡依

控制连接方式: DB25OUT


净重: 0.5KG

工作环境: 室内 (10-35°)



高功率绿激光地标可安装在城市高层大厦顶端, 旅游景点等户外场所, 是集激光应用技术、计算机图像处理技术各超高速振镜控制技术于一体的高科技产品。该产品使用高功率的绿激光, 可在空中演绎出各种动态的线、面、旋转体等几何图案, 也可演绎编辑的各种图形文字。纯粹绚丽的激光图案可360度全方位扫描, 方圆数公里均能观赏到其独特的激光夜景, 视觉效果强劲、震撼, 具有王者风范, 是都市标志性建筑、著名景区的点睛之“笔”, 能使该建筑物活景区成为城市中耀眼的地标及独特的城市夜景, 是城市亮化工程中高品位的象征。

High power green laser landmark can be installed in the top buildings, such as tourist attractions and other outdoor place, is a laser application technology computer image processing technology and speed scanner control of high-tech products. This products used high power green laser, can deduce dynamic short line surface, rotating and geometric patterns, also can play text editor. Laser patterns can scan 360-degree, can enjoy its unique laser effects in far place wonderful effects, robust, shock, is the city landmark, the famous scenic, can become a shining landmark in the city and the unique urban landscape, urban lighting project a symbol of high quality.

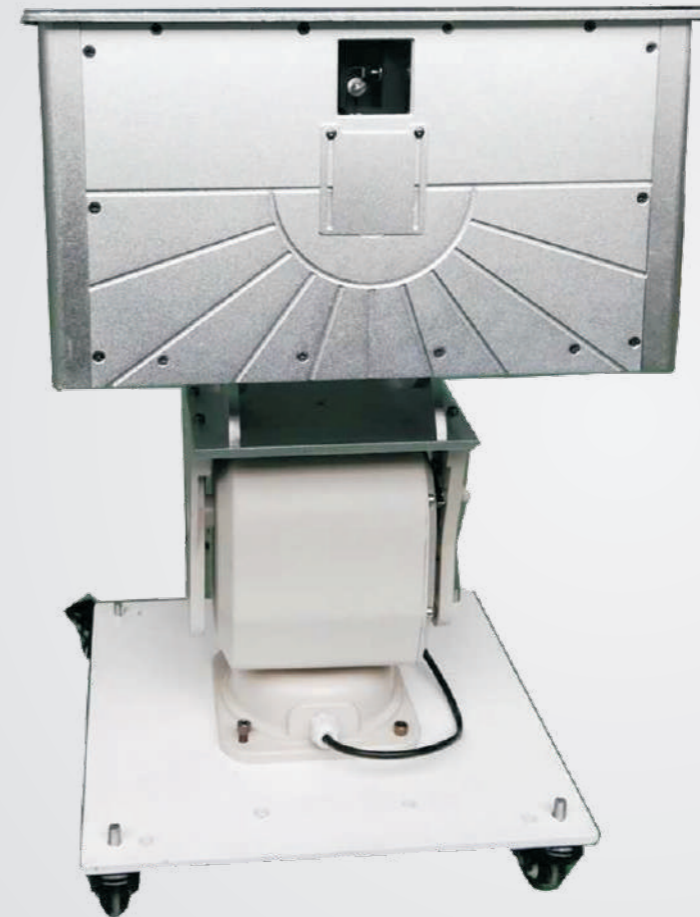

00

激光地标/激光舞

HW-910/920/930/940/ RGB30/RGB40/RGB50/ RGB60

Laser Landmarks Green 10W-40W or RGB 30-60W
10W~40W绿色/30-60W全彩色风冷地标激光灯

技术参数:

电源供应: AC100~240V, 50Hz~60Hz

额定功率: <1500W

激光功率: 10W-40W/RGB30-60W

激光颜色: 翠绿色(532nm或520nm)或全彩色

扫描系统: 高速震镜扫描≥20kpps, 具有完善的过小、过压、过载、过热等监控和保护功能。

单线射程距离: 1KM-10KM

扫描距离: 1KM-5KM

旋转角度: 水平360度

控制软件: 美国Pangolin(穿山甲); 德国Phoenix (火凤凰)

冷却方式: 风冷

Technical Parameters:

Power Supply: AC100~240V, 50HZ~60HZ

Power Consumption: 1500W max

Laser Power: Green 10W-40W or RGB 30-60W

Laser Color: Green(532nm/515nm) or RGB

Scan System: high speed scanner≥20kpps vibratory mirror system

Single Line Range: 1KM-10KM


Range Scanning: 1KM-5KM

Pan: 360 degree

Control Software: Pangolin or Phoenix

Cool System: fan

00 激光地标/激光舞

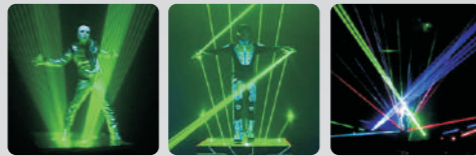

激光人是融合了激光编程、舞蹈创意、音乐制作三位一体的全新激光舞蹈表演形式，伴随着动感的音乐节奏，舞者就像光影界的魔术师，激光仿佛被赋予了生命的灵性时而光影动，时而人舞交融。每一束光线都是最好的道具，或绚烂或惊奇。
激光人表演系统一般由激光器、控制软件及表演程序、激光扫描组件、舞台、激光笔等组成。适用说Disco,演艺吧、夜总会、电视台、歌剧院等要求较高的场所使用。

Laser man is the laser programming creative dance, music to combine a new laser performers, along with the rhythm of the music, laser dancer seems to have been given life, form time to time with the shadow moving. The beam of light is the best, gorgeous and surprise, applicable for Disco, Clubs, KTV station, pub, bar where the special dancing effect required.

F5000-820/830/850/950

Laser Man 激光人

技术参数：

电源供应：AC100~240V, 50HZ~60HZ

额定功率：<200W

激光功率：2W/3W/5W或RGB5W

激光颜色：翠绿色(532nm)或RGB

扫描系统：40kpps振镜扫描

控制方式：ILDA

控制软件：美国Pangolin (穿山甲)

德国Phoenix (火凤凰)

工作环境：室内(10~35°)

Technical Parameters:

Power Supply: AC100~240V, 50HZ~60HZ

Power Consumption: 200W max

Laser Power: 2W/3W/5W or RGB5W

Laser Color: Green(532nm) or RGB

Scan System: high speed scanner 40kpps vibratory mirror system

Control Mode: ILDA

Control Software: Pangolin or Phoenix

Operating Environment: 10~35° indoor



00 LED全彩帕灯系列

P-007/P008

72pcs LED par light
72颗帕灯

技术参数：

工作电压：AC100-240V 50/60Hz

功率：180W/300W

光源：72颗1W/3W大功率LED灯珠
(红18、绿18、蓝18、白18)

透镜角度：15°、25°、45°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内(10-35°)

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ

Power Consumption: 180W/300W

LED source: 72pcs 1W/3W RGB LED
(Red 18pcs, Green 18pcs, Blue 18pcs, White 18pcs)

Beam angle: 15°, 25°, 45°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master & Slave

Housing: Aluminum

Working environment: indoor (10-35°)



P-003

72pcs 3 in 1 LED par light
72颗三合一帕灯

技术参数：

工作电压：AC100-240V 50/60Hz

功率：300W

光源：72颗3合一功率LED灯珠

透镜角度：25°、40°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内(10-35°)

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ

Power Consumption: 300W

LED source: 72pcs RGB 3 in 1 high power LED

Beam angle: 25°, 40°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master & Slave

Housing: Aluminum

Working environment: indoor (10-35°)



N-P001/P002

60pcs 3W/1W LED par light
60颗3W/1W帕灯

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ

Power Consumption: 200W/90W

LED source: 60pcs 1W/3W RGB LED (Red 14pcs, Green 14pcs, Blue 14pcs, White 18pcs)

Beam angle: 15°, 25°, 45°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master & Slave

Housing: Aluminum

Working environment: indoor (10-35°)

技术参数：

工作电压：AC100-240V 50/60Hz

功率：200W/90W

光源：60颗3W/1W大功率LED灯珠
(红14、绿14、蓝14、白18)

透镜角度：15°、25°、45°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内(10-35°)



N-P009/N-P010

54 pcs LED Waterproof PAR Light 54颗LED防水 PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W/200W
Light Source: High power 1W or 3W LED, 54 pcs of leds: 12 Red, 18 Green, 18Blue, 6White
Beam angle: 15°, 25°, 45°(optional)
Color: 16.7 million for RGB
Grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Channel: 4~7 channels
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W/200W
光源: 54颗1W/3W高功率LED (红色12颗、绿色18颗、蓝色18颗、白光6颗)
发光角度: 15°、25°、45°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4~7通道 (多通道可选)
机壳材料: 铸铝

N-P025

54 3W Warm white LED PAR Light 54颗3W 暖白LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: High power 3W Warm white LED
Beam angle: 15°, 25°, 45°(optional)
Color Temperature: 2800K~3200K
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 54颗3W高功率暖白LED
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4/8通道
机壳材料: 铸铝

N-P012

54 pcs RGB 3 in 1 LED PAR Light 54颗RGB 3合1 LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 54 pcs 3W RGB 3 in 1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 54颗3w RGB 3合1 LED
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝

N-P028

54 pcs 0.75w par light 54颗0.75W帕灯



Technical Parameters:


Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W
Light Source: High power 0.75W LED
Beam angle: 15°, 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 60W
光源: 0.75W高功率LED (红色12颗、绿色14颗、蓝色14颗、白色14颗)
发光角度: 15°、25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝

N-P013/N-P014

54 pcs LED PAR Light 54颗LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W/200W
Light Source: High power 1W or 3W LED
Beam angle: 15°, 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W/200W
光源: 54颗1W/3W高功率LED (红色12颗、绿色14颗、蓝色14颗、白色14颗)
发光角度: 15°、25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝

P-004

36 pcs 4 in 1 LED par light 36颗四合一帕灯



技术参数:

工作电压: AC100-240V 50/60Hz
功率: 300W
光源: 36颗4合一高功率LED灯珠
透镜角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512、声控、自走、主从
机壳材料: 铸铝
工作环境: 室内 (10-35°)

Technical Parameters:

Power Supply: AC100-240V, 50HZ/60HZ
Power Consumption: 300W
LED source: 36pcs 4 in 1 high power LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGB
Control mode: DMX-512, Auto, Sound, Master & Slave
Housing: Aluminum
Working environment: indoor (10-35°)

N-P005/N-P006

36 pcs LED PAR Light 36颗 LED PAR灯



Technical Parameters:


Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 60W/120W
Light Source: High Power 1W or 3W LED 36pcs of leds 12Red, 12Green, 12Blue
Beam angle: 15°, 25°, 40°(optional)
Color: RGB color mixing
Function: Color Changing, Strobe, Speed/ Luminance adjustable, etc
Control mode: DMX-512, music control, automatic, master & slave
Channel: 6 channels
Outer cover material: Aluminum
Operating Environment: indoor

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 60W/120W
光源: 36颗1W/3W高功率LED (红色12颗, 绿色12颗, 蓝色12颗)
发光角度: 15°、25°、40°可选
颜色: RGB混色
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 6通道
机壳材料: 铸铝
工作环境: 室内

N-P020

12 pcs RGBW 4in1 LED PAR Light 12颗RGBW 4合1 LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 12pcs 10W RGBW 4in1 LED
Beam angle: 25°, 40°(optional)
Color: 16.7 million for RGBW
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 12颗10W RGBW 4合1 LED灯珠
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝

N-P015

24 pcs RGBW 4in1 LED Waterproof PAR Light 24颗 RGBW4合1LED防水 PAR灯



Technical Parameters:


Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: High power 3W Warm white LED
Beam angle: 15°, 25°, 45°(optional)
Color Temperature: 2800K~3200K
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 54颗3W高功率暖白LED
发光角度: 25°、40°可选
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
控制通道: 4/8通道
机壳材料: 铸铝

N-P026

100W/150W/200W RGB(3 in 1) COB LED PAR Light 100W RGB 3合1 COB LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W
Light Source: 1 pcs 100W/150W/200W RGB(3in1) COB LED
Beam angle: 40°
Color: 16.7 million for RGB
Control mode: DMX-512, music control, automatic, master & slave
Strobe: 0-20Hz
Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W
光源: 1颗100W/150W/200W RGB (3合1) COB LED
发光角度: 40°
颜色: 1670万颜色变化
控制方式: DMX-512信号控制、声控、自走、主从
频闪: 0-20Hz
机壳材料: 铸铝

N-P016

18pcs RGBW 4in1 LED Waterproof PAR Light 18颗 RGBW4合1LED防水 PAR灯



Technical Parameters:


Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 200W
Light Source: 18pcs 10W RGBW 4in1 LED
Beam angle: 25°, 45°(optional)
Color: 16.7 million for RGB
Grade of waterproof: IP65
Control mode: DMX-512, music control, automatic, master & slave
Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 200W
光源: 18颗10W RGBW4合1LED灯珠
发光角度: 25°、45°可选
颜色: 1670万颜色变化
防水等级: IP65
控制方式: DMX-512信号控制、声控、自走、主从
机壳材料: 铸铝

N-P027

100W 2in1 COB LED PAR Light 100W 2合1 COB LED PAR灯



Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ
Power Consumption: 120W
Light Source: 1 pcs 100W White and Yellow 2in1
Function: Each color can be controlled alone, 8CTs inside(2800,3200,3500,4200,4900,5600,5900,6500K)Also you can choose the CT in the DMX channels
Beam angle: 40°
Control mode: DMX-512, music control, automatic, master & slave
Strobe: 0-20Hz
Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz
功率: 120W
光源: 1颗100W正白和黄色 (2合1) COB LED
功能: 每种颜色可单独控制, 内置八种色温可选 (2800、3200、3500、4200、4900、5600、5900、6500K), 也可通过控台来混色
发光角度: 40°
控制方式: DMX-512信号控制、声控、自走、主从
频闪: 0-20Hz
机壳材料: 铸铝

10 摇头灯系列

N-B350

350W Moving head Beam+Gobo Light
350W摇头光束图案三合一灯

技术参数：

电源供应：AC100V~240V/50~60Hz

功率：600W

光源：350W

光源寿命：2000小时

色盘：带有14种颜色+白光。半色效果图案盘及效果。

固定图案：12个固定图案+白光。

旋转图案：7个黑白旋转图案+空白，可更换LOGO片抽拔式，直径24.9mm，内容直径19mm，高速抖动。

棱镜：1个棱镜盘，可选16面旋转棱镜、三面旋转棱镜。

效果盘：七彩彩虹效果+雾化盘

频闪：速度可调频闪效果、机械调光及雾

控制模式：DMX512/自走/声控

通道数量：12通道/22通道 两种通道模式

Technical Parameters:

Power supply: AC 100-240 V 50/60Hz

Power Consumption: 600W

Lamp: 350W

Average Lifespan: 2000H

Color: 14 color + blank color wheel

Fixed gobo wheel: 12 gobos+white(contains 2 colorful glass gobos), adjustable speed of positive/negative direction

Rotated gobo wheel: 7 plug-in type rotated gobos, replaceable LOGO adjustable speed of positive/negative direction

Color Wheel: 14 colors+white

Effect Wheel: Frost+rainbow effect

Strobe: Double lens strobe (0.5-9 times/ second)

Control mode: Standard DMX512, Automatic and Master/ slave mode

Channel: 12/22 Chs



N-B200/N-B230

200W/230W Moving head Beam Light
200W/230W摇头光束灯

技术参数：

电源供应: AC100V~240V/50~60Hz,

功率：200W/230W

光源：200W/230W

光源寿命：2000小时

颜色：1个色盘 带有14种颜色+空白

图案：1个图案盘带有17个固定图案片+空白

棱镜：旋转八面棱镜,可双向旋转

镜头：高精密封胶合光学镜头

调焦：线性调焦

调光：0-100%线性调节

投射光范围：水平540°，解析度16Bit，垂直270°，解析度16Bit

光束角度：平行光束角：0-3.8°

频闪：双片式频闪(0.5-9次/秒)

控制模式：DMX512/自走/声控

通道数量：16通道/20通道 两种通道模式

Technical Parameters:

power supply: AC 100-240 V 50/60Hz

Lamp: 200W/230W

Average Lifespan: 2000H

Color: 14 color + blank color wheel

Gobo: 17 fixed gobo + blank gobo

Prism: rotation 8-face prism, Bilateral rotation

Lens: high precision optical lens

Focus: linear adjustment

Dimmer: 0-100% linear adjustment

Pan/Tilt: X axis 540° Y axis 27°, 16 bit precision scan

Beam angle: parallel beam angel 0-3.8°

Strobe: Double lens strobe (0.5-9 times/ second)

Control mode: Standard DMX512, Automatic and Master/ slave mode

Channel: 16/20 HS



10 摇头灯系列

N-Y001

108 Pcs LED Moving Head Light
108颗LED摇头灯

技术参数：

电源供应：AC90~240V, 50Hz~60Hz

功率：400W

光源：108颗3W高功率LED（红色30颗、绿色30颗、蓝色30颗、白色18颗）

发光角度：15° 25° 45° 可选

颜色：1670万颜色变化

控制方式：DMX-512信号控制、声控、自走、主从

控制通道：16/12 通道

水平扫描：630度

垂直扫描：270度

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 400W

Light Source: High power 3W LED

108 pcs of leds: 30 Red, 30 Green, 30 Blue, 18 white

Color: 16.7 million for RGBW

Control mode: DMX-512, music control, automatic, master & slave

Channel: 16/12channels

Level Scanning: 630° (16 bit precision scan)

Vertical Scan: 270° (16 bit precision scan)

Outer cover material: Aluminum body, black



N-Y002

36 Pcs 10W LED Zoom Moving Head Light
36颗10W全彩4合1 LED调焦摇头灯

技术参数：

电源供应：AC90~240V, 50Hz~60Hz

功率：400W

光源：36颗10W全彩4合1灯珠

颜色：1670万颜色变化

控制方式：DMX-512信号控制、声控、自走、主从

控制通道：16/12 通道

水平扫描：630度

垂直扫描：270度

调焦角度：15-60度

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 400W

Light Source: 36 pcs 10W RGBW 4 in 1 LED

Color: 16.7 million for RGB

Control mode: DMX-512, music control, automatic, master & slave

Channel: 16/12channels

Pan: 630 degree

Tilt: 270 degree

Zoom: 15-60

Outer cover material: Aluminum body



LED效果灯系列

N-X014/N-X014A

LED Magic Crystal Ball
水晶魔球

技术参数：

电源供应：AC100V~AC230V
50Hz~60Hz

功率：20W

光源：4颗3w/6颗1W灯珠

颜色：4色或6色

控制方式：DMX-512 控制、声控、自走、
主从

Technical Parameters:


Power Supply: AC100~AC230V, 50HZ~60HZ

Power Consumption: 20W

Light Source: 4 pcs 3W led or 6pcs 1W led

Color: 4 Color or 6 Color

Control mode: DMX-512, music control,
automatic, master & slave



N-X026

Ceiling LED EFFECT LIGHT 吸顶LED
水晶魔球

技术参数：

电源供应：AC100V~AC230V ,
50Hz~60Hz

功率：20W

光源：4颗3W/6颗1W灯珠

颜色：4色或6色

控制方式：DMX-512信号控制、声控、
自走、主从

Technical Parameters:


Power Supply: AC100~AC230V, 50HZ~60HZ

Power Consumption: 20W

Light Source: 4 pcs 3W led or 6pcs 1W led

Color: 4 Color or 6 Color

Control mode: DMX-512, music control,
automatic, master & slave

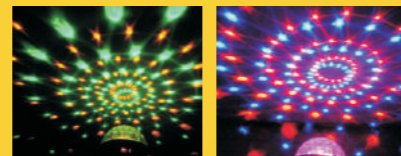

LED效果灯系列

N-S013/S014/S015

20W/30W/50W ceiling LED strobe light
20W/30W/50W吸顶LED频闪

技术参数：

电源供应：AC100V~AC230V
50Hz~60Hz

功率：60W max

光源：1颗20W/30W/50W高功率白色LED

功能：频闪速度可调

控制方式：自走、声控

机壳材料：铸铝

Technical Parameters:

Power Supply: AC100~AC230V, 50HZ~60HZ

Power Consumption: 60W

Light Source: 1 pcs 20W/30W/50W white LED

Function: flash pace adjustable

Control mode: music control, automatic

Outer cover material: Aluminum body

Operating Environment: indoor



N-S022

MINI Strobe
迷你20W频闪

技术参数：

电源供应：AC100V~AC230V,
50Hz~60Hz

功率：25W

光源：1颗20WLED

功能：频闪速度可调

控制方式：自走、声控

工作环境：室内

Technical Parameters:

Power Supply: AC100~AC230V, 50HZ~60HZ

Power Consumption: 25W

Light Source: 1 pcs 20W LED

Function: flash pace adjustable

Control mode: automatic, music control

Operating Environment: Aluminum body



LED全彩帕灯系列

P-007/P008

72pcs LED par light
72颗帕灯

技术参数：

工作电压：AC100-240V 50/60Hz

功率：180W/300W

光源：72颗1W/3W大功率LED灯珠
(红18、绿18、蓝18、白18)

透镜角度：15°、25°、45°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内 (10-35°)

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ

Power Consumption: 180W/300W

LED source: 72pcs 1W/3W RGB LED
(Red 18pcs, Green 18pcs, Blue
18pcs, White 18pcs)

Beam angle: 15°, 25°, 45°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound,
Master & Slave

Housing: Aluminum

Working environment: indoor (10-35°)



P-003

72pcs 3 in 1 LED par light
72颗三合一帕灯

技术参数：

工作电压：AC100-240V 50/60Hz

功率：300W

光源：72颗3合一功率LED灯珠

透镜角度：25°、40°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内 (10-35°)

Technical Parameters:

Power Supply: AC100~240V, 50HZ/60HZ

Power Consumption: 300W

LED source: 72pcs RGB 3 in 1 high power LED

Beam angle: 25°, 40°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master
& Slave

Housing: Aluminum

Working environment: indoor (10-35°)



P-004

36pcs 4 in 1 LED par light
36颗四合一帕灯

技术参数：

工作电压：AC100-240V 50/60Hz

功率：300W

光源：36颗4合一功率LED灯珠

透镜角度：25°、40°可选

颜色：1670万颜色变化

控制方式：DMX-512、声控、自走、主从

机壳材料：铸铝

工作环境：室内 (10-35°)

Technical Parameters:

Power Supply: AC100-240V, 50HZ/60HZ

Power Consumption: 300W

LED source: 36pcs 4 in 1 high power LED

Beam angle: 25°, 40°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master
& Slave

Housing: Aluminum

Working environment: indoor (10-35°)





N-P001/P002

60pcs 3W/1W LED par light 60颗3W/1W帕灯

Technical Parameters:

Power Supply: AC100~240V, 50/60HZ

Power Consumption: 200W/90W

LED source: 60pcs 1W/3W RGB LED (Red 14pcs, Green 14pcs, Blue 14pcs, White 18pcs)

Beam angle : 15°, 25°,45°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, Auto, Sound, Master & Slave

Housing: Aluminum

Working environment: indoor (10-35°)

技术参数:

工作电压: AC100-240V 50/60Hz

功率: 200W/90W

光源: 60颗3W/1W大功率LED灯珠
(红14、绿14、蓝14、白18)

透镜角度: 15°、25°、45°可选

颜色: 1670万颜色变化

控制方式: DMX-512、声控、自走、主从

机壳材料: 铸铝

工作环境: 室内 (10-35°)



N-P025

54 3W Warm white LED PAR Light 54颗3W 暖白LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 200W

Light Source: High power 3W Warm white LED

Beam angle: 15°,25°,45°(optional)

Color Temperature: 2800K~3200K

Control mode: DMX-512, music control, automatic, master & slave

Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 200W

光源: 54颗3W高功率暖白LED


发光角度: 25°、40°可选

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

控制通道: 4/8通道

机壳材料: 铸铝



N-P026

100W RGB(3 in 1)COB LED PAR Light 100W RGB 3合1COB LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 120W

Light Source: 1 pcs 100W RGB(3in1)COB LED

Beam angle: 40°

Color: 16.7million for RGB

Control mode: DMX-512, music control, automatic, master & slave

Strobe: 0-20Hz

Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 120W

光源: 1颗100W RGB (3合1) COB LED

发光角度: 40°

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

频闪: 0-20Hz

机壳材料: 铸铝



N-P027

100W 2in1 COB LED PAR Light 100W 2合1COB LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 120W

Light Source: 1 pcs 100W White and Yellow 2in1

Function: Each color can be controlled alone, 8CTs inside(2800,3200,3500,4200,4900,5600,5900,6500K)Also you can choose the CT in the DMX channels

Beam angle: 40°

Control mode: DMX-512, music control, automatic, master & slave

Strobe: 0-20Hz

Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 120W

光源: 1颗100W正白和黄色(2合1) COB LED

功能: 每种颜色可单独控制, 内置八种色温可选(2800、3200、3500、4200、4900、5600、5900、6500K), 也可通过控台来混色

发光角度: 40°

控制方式: DMX-512信号控制、声控、自走、主从

频闪: 0-20Hz

机壳材料: 铸铝



N-P020

12 pcs RGBW 4in1 LED PAR Light 12颗RGBW 4合1 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 200W

Light Source: 12pcs10W RGBW 4in1 LED

Beam angle: 25°,40°(optional)

Color: 16.7 million for RGBW

Control mode: DMX-512, music control, automatic, master & slave

Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 200W

光源: 12颗10W RGBW 4合1 LED灯珠

发光角度: 25°、40°可选

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

机壳材料: 铸铝





N-P012

54 pcs RGB 3 in 1 LED PAR Light 54颗RGB 3合1 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 200W

Light Source: 54 pcs 3W RGB 3 in 1 LED

Beam angle: 25°, 40°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, music control,
automatic, master & slave

Outer cover material: Aluminum body

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 200W

光源: 54颗3W RGB 3合1 LED

发光角度: 25°、40°可选

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

机壳材料: 铸铝

N-P009/N-P010

54 pcs LED Waterproof PAR Light 54颗LED防水 PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 120W/200W

Light Source: High power 1W or 3W LED, 54

pcs of leds : 12 Red, 18 Green, 18Blue, 6White

Beam angle: 15°, 25°, 45°(optional)

Color: 16.7 million for RGB

Grade of waterproof: IP65

Control mode: DMX-512, music control,
automatic, master & slave

Channel: 4~7 channels

Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 120W/200W

光源: 54颗1W/3W高功率LED (红色12颗、绿色18颗、蓝色18颗、白光6颗)

发光角度: 15°、25°、45°可选

颜色: 1670万颜色变化

防水等级: IP65

控制方式: DMX-512信号控制、声控、自走、主从

控制通道: 4~7通道 (多通道可选)

机壳材料: 铸铝



N-P005/N-P006

36 pcs LED PAR Light 36颗 LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 60W/120W

Light Source: High Power 1W or 3W LED 36pcs
of leds 12Red, 12Green, 12Blue

Beam angle: 15°, 25°, 40°(optional)

Color: RGB color mixing

Function: Color Changing, Strobe, Speed/
Luminance adjustable, etc

Control mode: DMX-512, music control,
automatic, master & slave

Channel: 6channels

Outer cover material: Aluminum

Operating Environment: indoor

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 60W/120W

光源: 36颗1W/3W高功率LED (红色12颗,
绿色12颗, 蓝色12颗)

发光角度: 15°、25°、40°可选

颜色: RGB混色

控制方式: DMX-512信号控制、声控、自走、主从

控制通道: 6通道

机壳材料: 铸铝

工作环境: 室内

N-P015

24 pcs RGBW 4in1 LED Waterproof PAR Light 24颗 RGBW4合1LED防水 PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 200W

Light Source: High power 3W Warm white LED

Beam angle: 15°, 25°, 45°(optional)

Color Temperature: 2800K~3200K

Control mode: DMX-512, music control,
automatic, master & slave

Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 200W

光源: 54颗3W高功率暖白LED

发光角度: 25°、40°可选

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

控制通道: 4/8通道

机壳材料: 铸铝



N-P013/N-P014

54 pcs LED PAR Light 54颗LED PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 120W/200W

Light Source: High power 1W or 3W LED

Beam angle: 15°, 25°, 40°(optional)

Color: 16.7 million for RGB

Control mode: DMX-512, music control,
automatic, master & slave

Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 120W/200W

光源: 54颗1W/3W高功率LED (红色12颗、绿色14颗、蓝色14颗、白色14颗)

发光角度: 15°、25°、40°可选

颜色: 1670万颜色变化

控制方式: DMX-512信号控制、声控、自走、主从

机壳材料: 铸铝

N-P016

18 pcs RGBW 4in1 LED Waterproof PAR Light 18颗 RGBW4合1LED防水 PAR灯

Technical Parameters:

Power Supply: AC90~240V, 50HZ~60HZ

Power Consumption: 200W

Light Source: 18pcs 10W RGBW 4in1 LED

Beam angle: 25°, 45°(optional)

Color: 16.7 million for RGB

Grade of waterproof: IP65

Control mode: DMX-512, music control,
automatic, master & slave

Outer cover material: Aluminum body, black

技术参数:

电源供应: AC90~240V, 50Hz~60Hz

功率: 200W

光源: 18颗10W RGBW4合1LED灯珠

发光角度: 25°、45°可选

颜色: 1670万颜色变化

防水等级: IP65

控制方式: DMX-512信号控制、声控、自走、主从

机壳材料: 铸铝

