

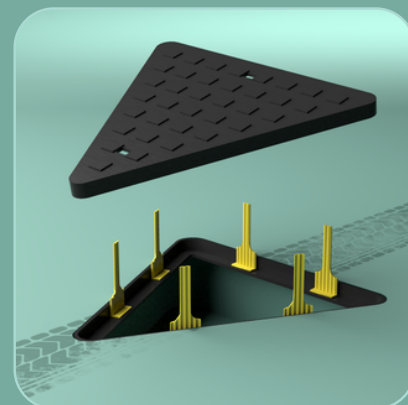
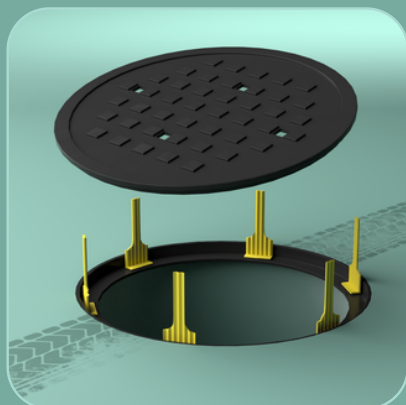


NOISE STOP

THE URBAN
SOUNDPROOFING

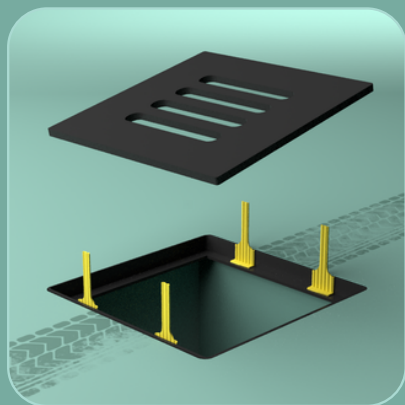

INSTALLATION GUIDE

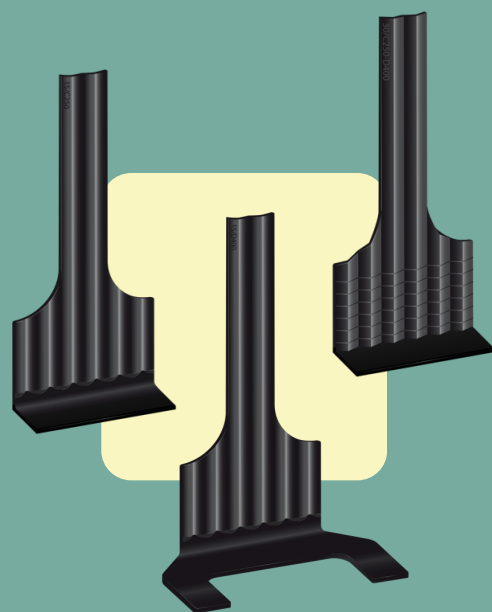

BANG!
BANG!

www.noisestop.it



03

04

05


06

07

08

09

MULTI DIRECTION SHOCK ABSORBER


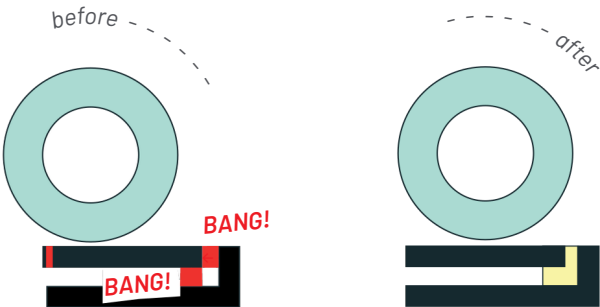


HowTo CHOOSE


Series	LIGHT NOISE	MEDIUM NOISE	HEAVY NOISE
Thickness	1,5 mm	2,0 mm	3,0 mm
Application	Light Cover Light Tilting Small Gaps	Wider Frames Medium Tilting Medium Gaps	Heavy Cover High Tilting Huge Gaps
Class	C250	D400	C250 • D400

GOLDEN RULES


for proper installation




Clean the cover seat well:
you can use the same Noise-Stop®



Place Noise-Stop® following the traffic flow:
this prevents possible shearing of the inserts
given by the stress of the cover



Fit the Noise-Stop® as external as possible,
well adhered to the edge of the inner frame




If you work alone, use a drop of silicone
to fix the Noise-Stop® and prevent them
from falling inside the manhole/drain



Always consult your local authorities or site supervisors prior carrying out any work. Always conduct a risk assessment process and establish an exclusion zone when carrying out the work. Traffic control might also be required.

Shape
SQUARE


 **+110°**
Celsius
-40°
T° SERVICE

 **1-2**
years
LIFETIME

First Choice Advised
Light Noise (15)


You can also use

Heavy Noise (30)
Medium Noise (20)

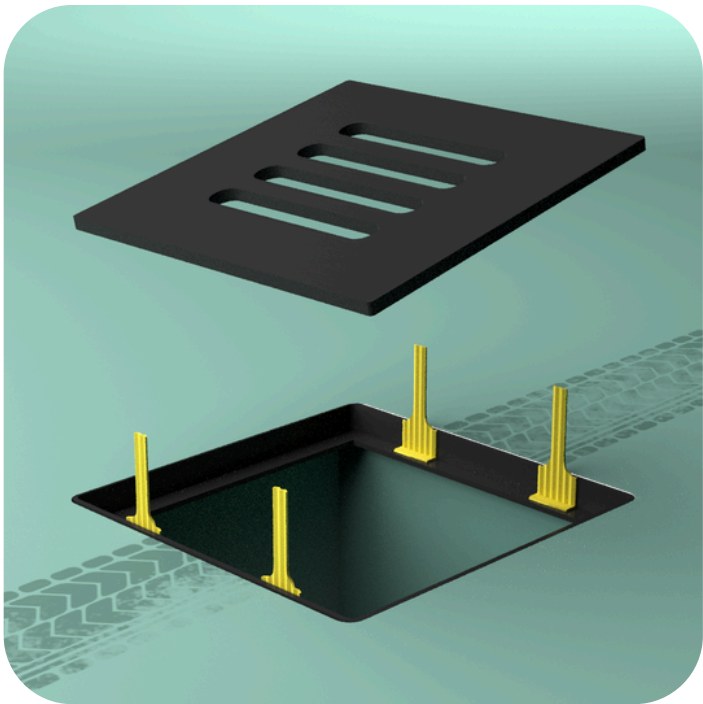

Recommended

04 Noise-Stop®

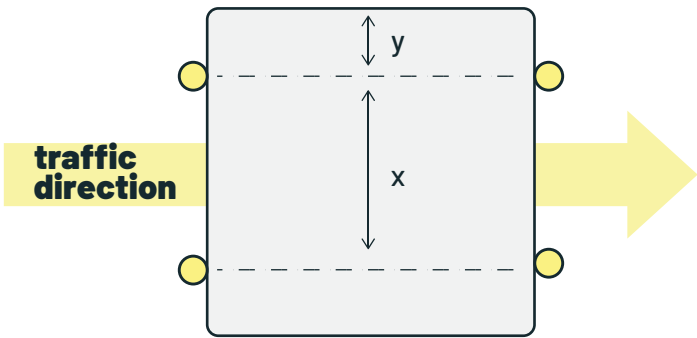


CUT EXCESS



ADAPTABLE

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION



place Noise-Stop® approximately within 100mm from the corners, perpendicular to the traffic direction.




WARNING: installing Noise-Stop® parallel to the traffic direction will cause Noise-Stop® to shear and fail.




The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape
CIRCULAR


 **+110°**
Celsius
-40°
T° SERVICE

 **1-2**
years
LIFETIME

First Choice Advised
Heavy Noise (30)

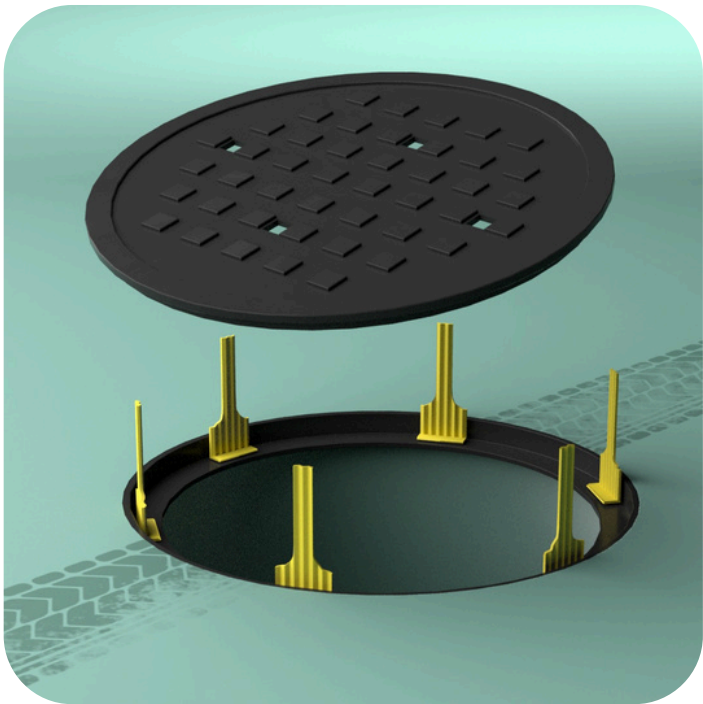

Recommended
06 Noise-Stop®

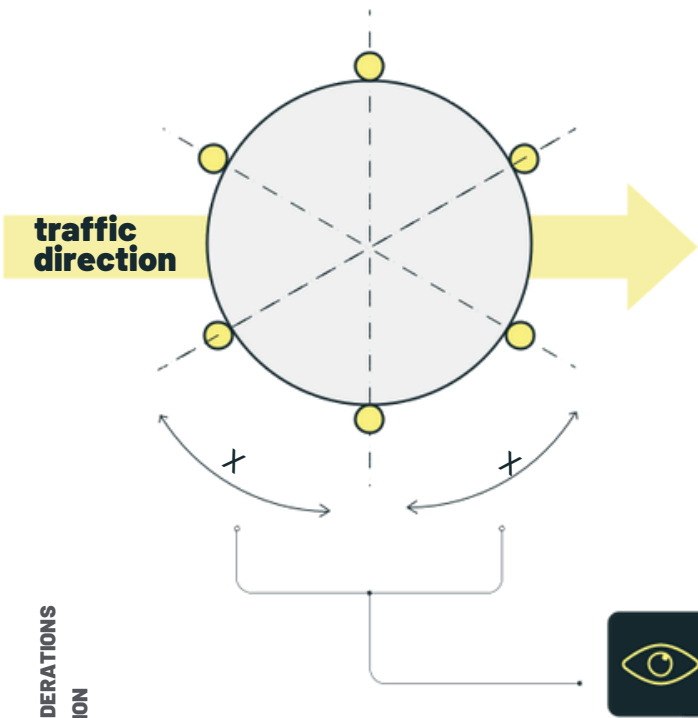

CUT EXCESS



ADAPTABLE




always place them at the same distance

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape
RECTANGLE


 **+110°**
Celsius
-40°
T° SERVICE

 **1-2**
years
LIFETIME

First Choice Advised
Medium Noise (20)


You can also use

Heavy Noise (30)

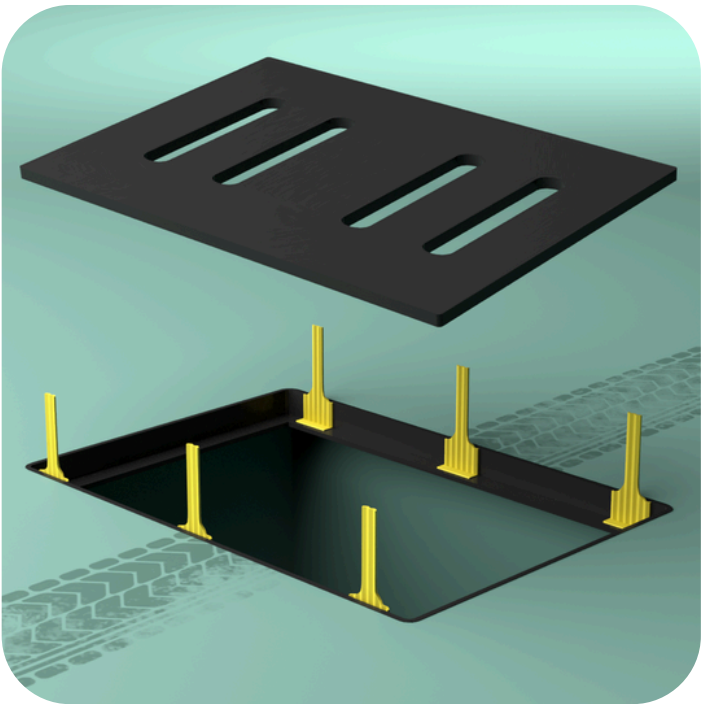

Recommended

06 Noise-Stop®

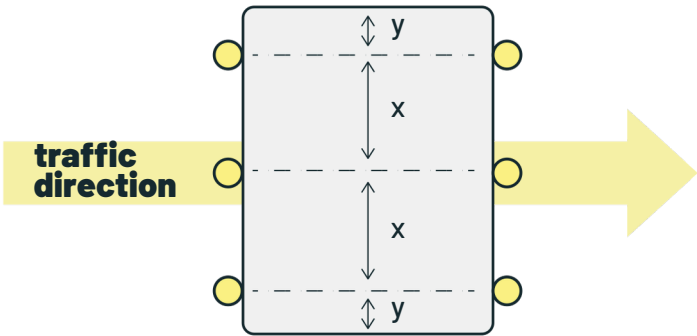

CUT EXCESS



ADAPTABLE

$x > y$




Place 4 Noise-Stop® approximately within 100mm from the corners and 2 Noise-Stop® in the middle, perpendicular to the traffic direction.




WARNING: installing Noise-Stop® parallel to the traffic direction will cause Noise-Stop® to shear and fail.

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape
TRIANGULAR


 **+110°**
Celsius
-40°
T° SERVICE

 **1-2**
years
LIFETIME

First Choice Advised
Light Noise (15)

You can also use

Heavy Noise (30)
Medium Noise (20)

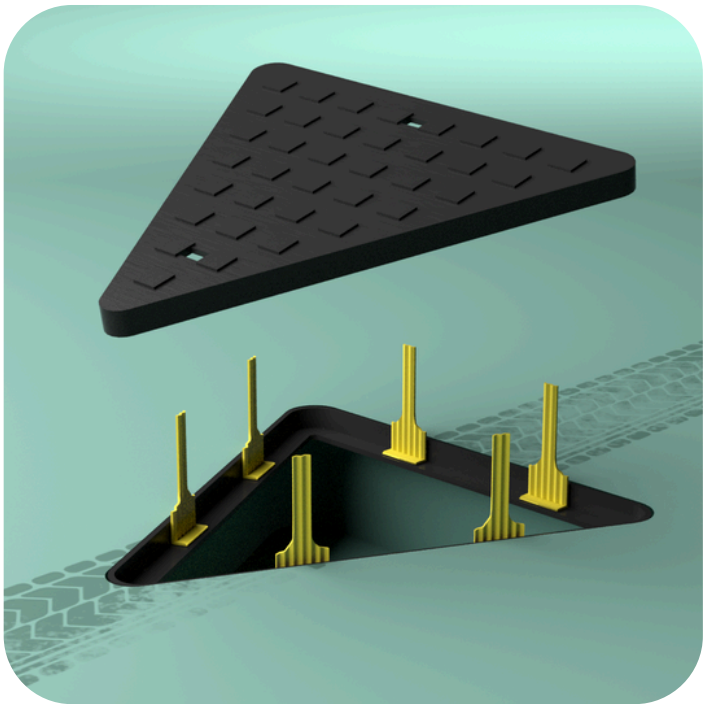

Recommended


06 Noise-Stop®



CUT EXCESS



ADAPTABLE

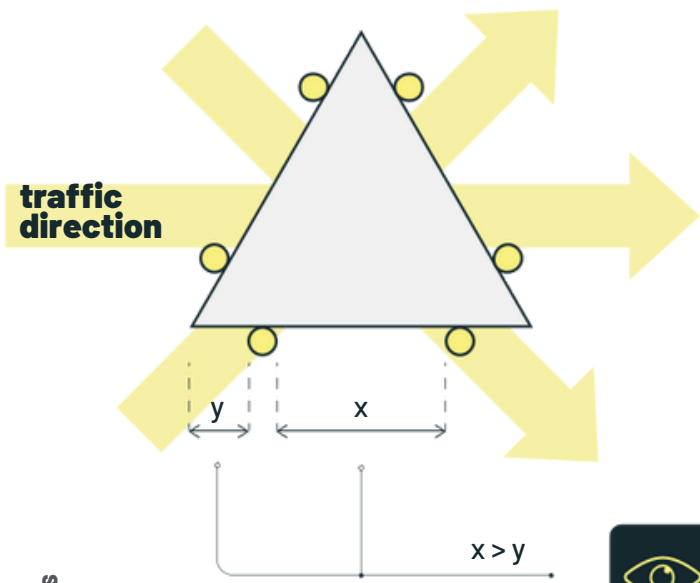

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION




Place Noise-Stop® near the corners.
Recommended spacing between 100mm to 150mm from the corners, approximately.



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape

SEGMENTED **SQUARE**

 **+110°**
Celsius
-40°
T° SERVICE

 **1-2**
years
LIFETIME


First Choice Advised
Heavy Noise (30)

You can also use

Medium Noise (20)


** a single one can replace
Heavy couple in the corner*

Light Noise (15)
if gap needs

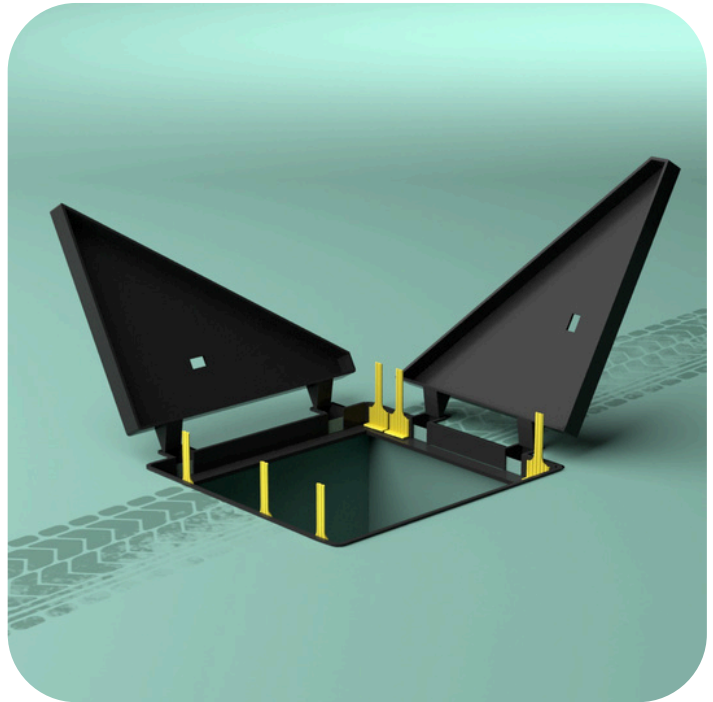

Recommended

06 Noise-Stop®

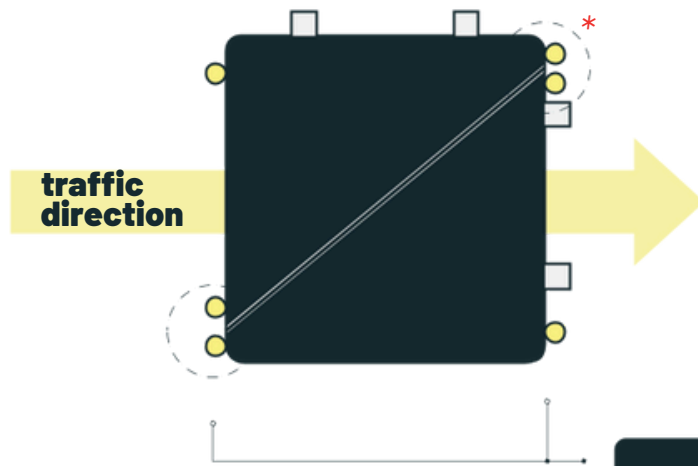

CUT EXCESS




ADAPTABLE



Noise-Stop® must be placed on every corner of both triangular sections of the cover

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION




WARNING: installing Noise-Stop® parallel to the traffic direction will cause Noise-Stop® to shear and fail.



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape

SEGMENTED **RECTANGLE**

 **+110°**
Celsius
-40°
T° SERVICE


 **1-2**
years
LIFETIME

First Choice Advised
Heavy Noise (30)

You can also use


Medium Noise (20)
*a single one can replace
Heavy couple in the corner*

Light Noise (15)
if gap needs

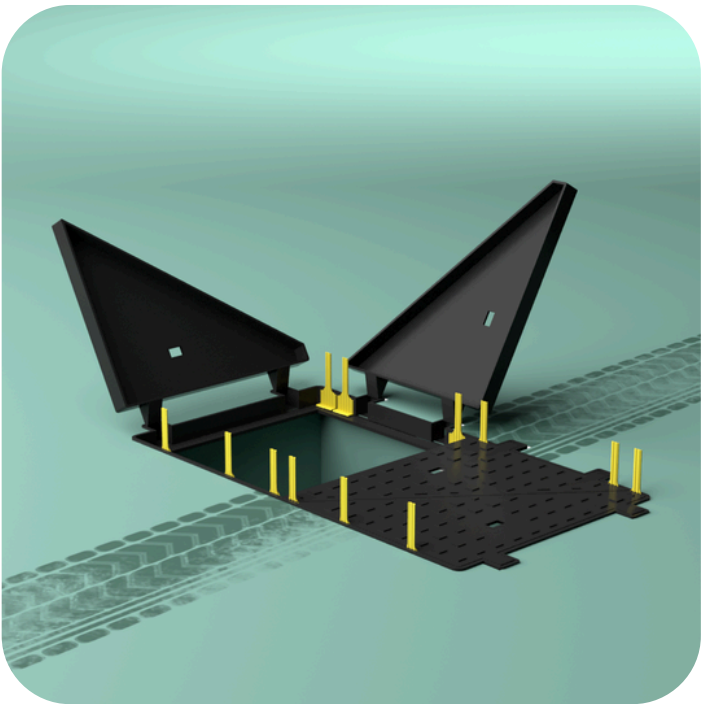

Recommended

12 Noise-Stop®

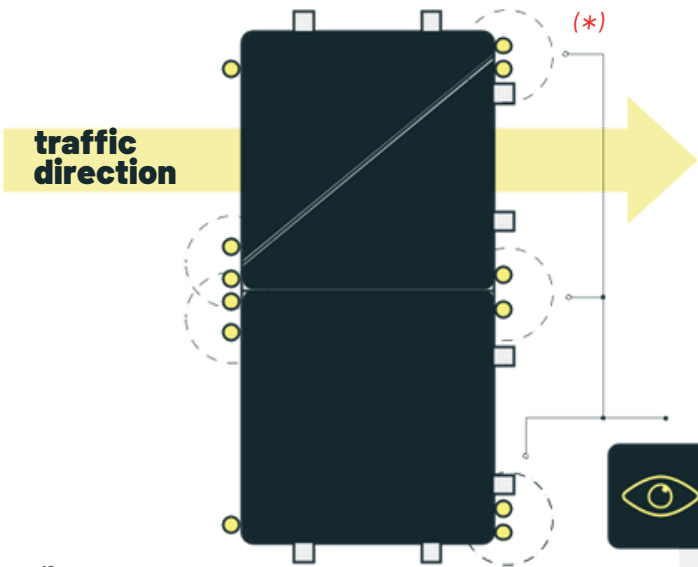

CUT EXCESS




ADAPTABLE



Noise-Stop® must be placed in every corner,
of every single triangle

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION




WARNING: installing Noise-Stop® parallel
to the traffic direction will cause Noise-Stop®
to shear and fail.



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom
and responsibility to choose and combine different types of series • If you need more help, please contact us!

Shape

STRIP DRAIN

 **+110°**
Celsius
-40°
T° SERVICE


 **1-2**
years
LIFETIME

First Choice Advised
Heavy Noise (30)

You can also use


Medium Noise (20)
if gap needs

Light Noise (15)
if gap needs

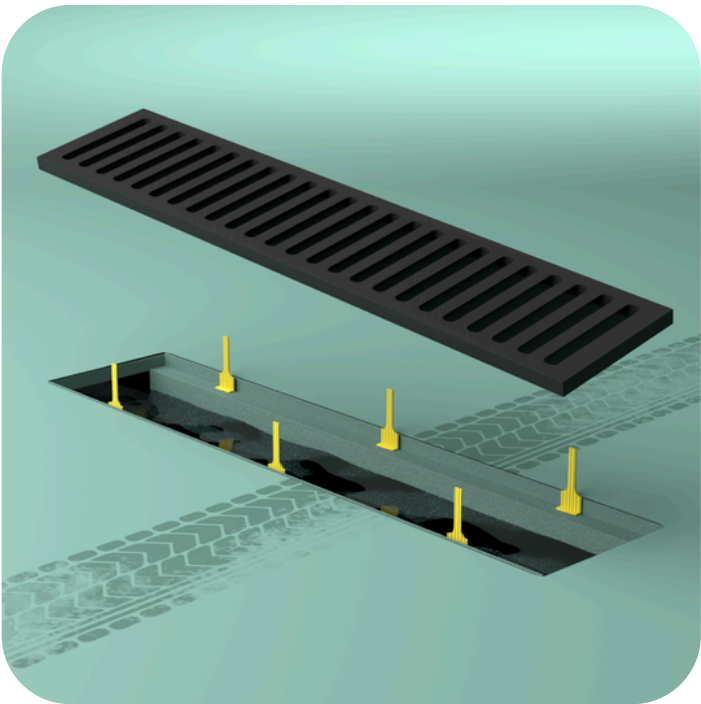

Recommended (minimum per unit)

06 Noise-Stop®

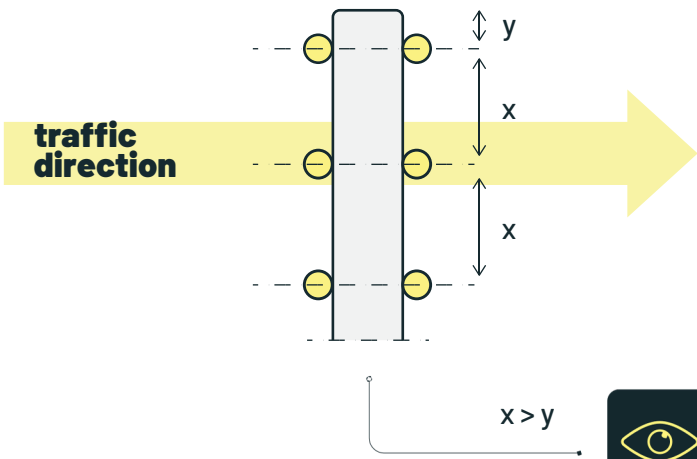


CUT EXCESS



ADAPTABLE

IMPORTANT CONSIDERATIONS
PRIOR INSTALLATION



Place 4 Noise-Stop® approximately within 100mm from the corners and 2 Noise-Stop® in the middle, perpendicular to the traffic direction.



the number of Noise- Stop® is related to the length of the stripdrain itself



The suggested Noise-Stop® series are general indication: for each specific case the customer assumes full freedom and responsibility to choose and combine different types of series • If you need more help, please contact us!

For more information contact us

ITALY
Headquarter



+39 340 2395 475



info@noisestop.it



+39 030 7401 249



+39 030 7401 048

Distributed in Australia by



Gabriel Volpato



sales@trevconsupplies.com.au



0416 658 032



www.trevconsupplies.com.au

the smart italian solution for a better life

Noise-Stop® is a registered trademark of ITG SRL - All rights reserved