

## PRO-VAC KM160E1


### FLOW MEDIA

#### Description:

- 3D PE Knitted mesh.
- Compatible with all standard epoxy, polyester and vinylester resin systems.
- Highly drapable so can be used on complex moulds.
- Can also be used as a reusable breather for debulking at room temperature.
- Available up to 2m wide.

#### Technical data:

Part number	PRO-VAC KM160E1
Colour	Black
Density	160 g/m <sup>2</sup> ±5%
Nominal Temp Resistant	120°C
Thickness	1.0 mm
Elongation At break	500%
Tensile Strength	23 N/mm <sup>2</sup>

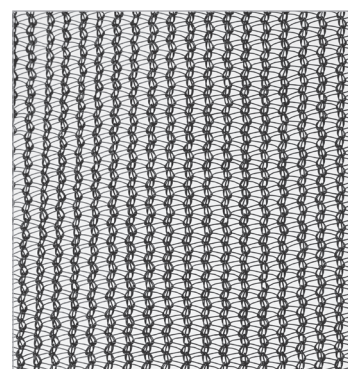

#### Packaging and storage

Plastic film inside, 100M/Roll.

It is recommended that the products are stored in a cool and dry environment.

The mesh should remain in the packaging until just prior to use.



HF Industri & Marine ApS

HF Industri & Marine ApS Gotlandsvej 6 5700 Svendborg Denmark  
Phone: +45 62 20 13 12 • Fax: +45 62 20 14 77 • info@hfmarine.dk • www.hfmarine.dk