


10.3 -SYNTHETIC-

BASIC

Standards: JASO MA2 - API SL

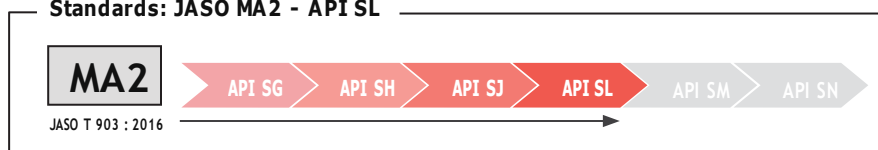

Available grades: 10W-30 / 10W-40 / 15W-50

10.3 / 10.4 / 15.5 are good quality, synthetic lubricants for 4-stroke motorcycles that ensure complete lubrication and protection of your engine.

● **PACKING UNITS:**



● **TECHNICAL DATA:**

TEST	METHOD	TYPICAL VALUES			MEASURE UNITS
		10W-30	10W-40	15W-50	
DENSITY AT 15 °C	ASTM D4052	0,871	0,869	0,878	g/cm ³
VISCOSITY AT 100 °C	ASTM D445	11,5	14,6	17,8	mm ² /s
VISCOSITY AT 40 °C	ASTM D445	77,0	100,0	136,3	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D2270	142	151	145	-
FLASH POINT	ASTM D92	230	226	226	°C
POUR POINT	ASTM D97	-39	-33	-33	°C
TBN	ASTM D2896	7,06	7,06	7,06	mg KOH/g
TAN	ASTM D664	2,0	2,1	2,1	mg KOH/g
N° JASO : JASO T 903:2016	-	M033IPN068	M033IPN069	M033IPN070	-