




R4000RS

- SYNTHETIC PLUS with ESTER -



REGULAR

Standards: JASO MA2 - API SM

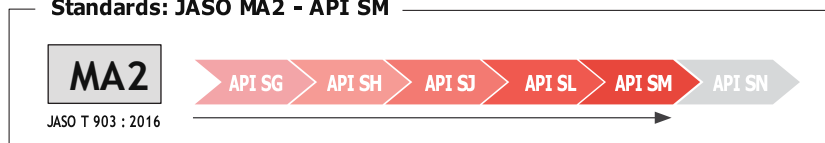

Available grades:

10W-30 / 10W-40 / 10W-50 / 15W-50 / 20W-50

R4000RS is a high-quality, semi-synthetic, ester-based lubricant for 4-stroke motorcycles, designed for regular use. IPONE has selected the best synthetic bases and additives to guarantee optimum protection for your engine and exceptional resistance to shearing.

● **CONDITIONNEMENTS :**



● **DONNÉES TECHNIQUES :**

TEST	METHOD	TYPICAL VALUES					MEASURE UNITS
		10W-30	10W-40	10W-50	15W-50	20W-50	
DENSITY AT 15 °C	ASTM D4052	0,872	0,870	0,869	0,871	0,884	g/cm ³
VISCOSITY AT 100 °C	ASTM D445	11,4	13,6	18,1	17,8	18,2	mm ² /s
VISCOSITY AT 40 °C	ASTM D445	77,0	91,4	125,2	135,0	154,2	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D2270	139	151	161	146	132	-
FLASH POINT	ASTM D92	226	224	228	244	244	°C
POUR POINT	ASTM D97	-39	-33	-39	-33	-30	°C
TBN	ASTM D2896	8,30	8,30	8,30	8,30	8,30	mg KOH/g
TAN	ASTM D664	1,9	1,9	2,0	1,9	1,9	mg KOH/g
N° JASO : JASO T 903:2016	-	M033IP N 063	M033IP N 064	M033IP N 065	M033IP N 066	M033IP N 067	-

