




ATV KATANA - 100% SYNTHETIC -

SPORT

Standards: JASO MA2 - API SM

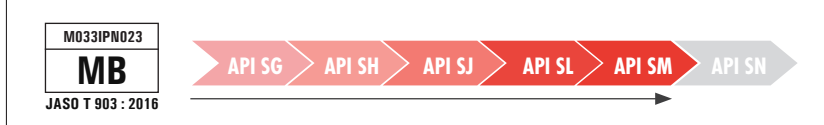

Available grade: 5W40

Katana ATV is a 100% synthetic lubricant for 4-stroke quad-bikes, designed to deliver good off-road sports riding performance. Its formula ensures maximum performance and optimal engine lubrication.

● **PACKING UNITS:**



● **TECHNICAL DATA:**

TEST	METHOD	TYPICAL VALUES	MEASURE UNITS
		5W40	
DENSITY AT 15 °C	ASTM D4052	0,859	g/cm ³
VISCOSITY AT 100 °C	ASTM D445	13,57	mm ² /s
VISCOSITY AT 40 °C	ASTM D445	82,2	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D2270	169	-
FLASH POINT	ASTM D92	226	°C
POUR POINT	ASTM D97	-42	°C
TBN	ASTM D2896	9,1	mg KOH/g
TAN	ASTM D664	2,5	mg KOH/g
N° JASO : JASO T 903:2016	-	M033IPN077	-

