

Active Optical Cables


10G SFP+

Regional Availability - Global

Siemon 10G SFP+ Active Optical Cable (AOC) assemblies offer a highly reliable and cost-effective alternative to transceiver assemblies available in lengths ranging from 0.5 m to 100 m, beyond the range of Direct Attach Copper Cables (DAC). These high performance and low power consumption AOCs are Ethernet, InfiniBand and MSA compliant with a robust construction, including a high-strength pull tab latching system which reduces plug loss and ensure more secure installations.

These 10G SFP+ assemblies are capable of transmitting data up to 10Gb/s, offering an easy installation with a flexible, multimode fiber cable. AOCs eliminate the interoperability issues of transceiver assemblies to achieve proper parameter optimization and are equipped with Digital Diagnostic Monitoring, allowing I²C (Inter-integrated circuit) real-time supervision of operating parameters and transmits warnings if those parameters exceed specification.


Typical AOC applications include point-to-point connections within data centers, high performance computing and storage racks. The versatile connections can be rack-to-rack within the same or another row, and their hot swappable and high-density design allows use within a wide range of top-of-rack and other data center architectures.

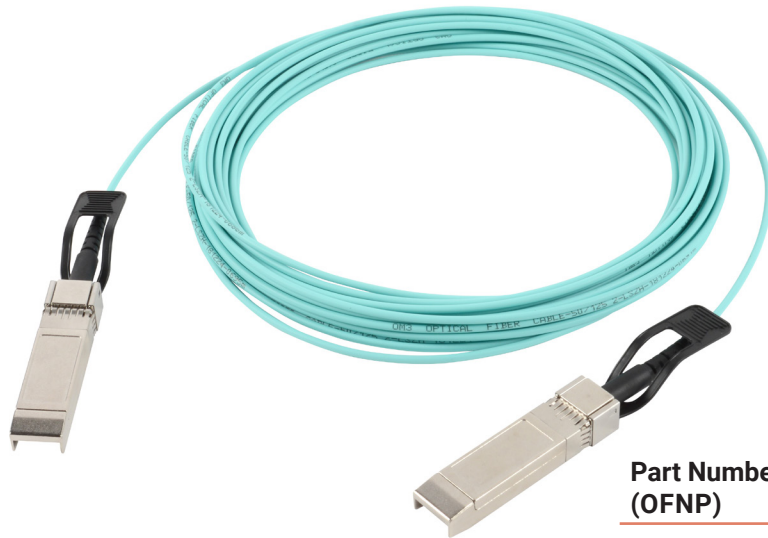

Standards Compliance

- SFP+ MSA
- SFF8431 Electrical
- SFF8432 Mechanical
- RoHS/REACH compliant
- TUV/UL certified

Part Number (OFNP)	Part Number (LSZH/OFNR)	Length
S1S10F-Y00.5B13	S1S10F-V00.5B13	0.5m (1.64 ft.)
S1S10F-Y01.0B13	S1S10F-V01.0B13	1.0m (3.28 ft.)
S1S10F-Y01.5B13	S1S10F-V01.5B13	1.5m (4.92 ft.)
S1S10F-Y02.0B13	S1S10F-V02.0B13	2.0m (6.56 ft.)
S1S10F-Y03.0B13	S1S10F-V03.0B13	3.0m (9.87 ft.)
S1S10F-Y05.0B13	S1S10F-V05.0B13	5.0m (16.40 ft.)
S1S10F-Y07.0B13	S1S10F-V07.0B13	7.0m (22.97 ft.)
S1S10F-Y10.0B13	S1S10F-V10.0B13	10m (32.80 ft.)
S1S10F-Y15.0B13	S1S10F-V15.0B13	15m (49.21 ft.)
S1S10F-Y20.0B13	S1S10F-V20.0B13	20m (65.62 ft.)
S1S10F-Y25.0B13	S1S10F-V25.0B13	25m (82.02 ft.)
S1S10F-Y30.0B13	S1S10F-V30.0B13	30m (98.43 ft.)
S1S10F-Y40.0B13	S1S10F-V40.0B13	40m (131.23 ft.)
S1S10F-Y50.0B13	S1S10F-V50.0B13	50m (164.04 ft.)
S1S10F-Y0100B13	S1S10F-V0100B13	100m (328.08 ft.)

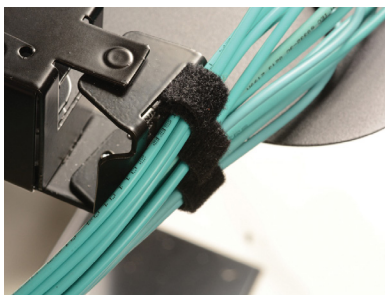

Small Diameter Bundles

AOC's thin diameter allow for smaller bundles which promotes better airflow.

Product Information

Absolute Maximum Ratings	Min	Max
Module Supply Voltage	0.0V	4.0V
Storage Temperature	-40°C (-40°F)	85°C (185°F)
Relative Humidity - Storage	0%	85%
Relative Humidity - Operating	0%	85%


Mechanical Specifications	
Minimum Bend Radius	20 × OD mm (without tension) 10 × OD mm (with max tension)
Cable Diameter (OD)	3.0mm ± 0.20
Fiber Type	OM3 multimode

Electrical Specifications	
Module Supply Voltage	3.13V to 3.47V (3.30V typical)
Case Operating Temperature	0°C (32°F) to 70°C (158°F) 25°C (77°F) (typical)
Single Module Supply Current	50mA (typical)
Maximum Power Consumption Per End	0.25W

Channel Parameters	
Channels	1 Lane, bi-directional
Data Rate per Channel	10.3125 Gb/s (max)
Operating Wavelength	850nm

Receiver Electrical Interface	
Rx Data Differential Output Voltage	200mV to 1000mV
Rx Data Differential Output Impedance	90Ω to 110Ω (100Ω typical)
LOS Assert Voltage	2v to $V_{CC1}+0.3$
LOS De-assert Voltage	0.3V to 0.4V

Transmitter Electrical Interface	
Tx Data Differential Input Voltage	200mV to 1600mV
Tx Data Differential Input Impedance	100Ω (typical)
Transmitter Disable Voltage	2V to $V_{CC1}+0.3$
Transmitter Enable Voltage	0.3V to 0.8V

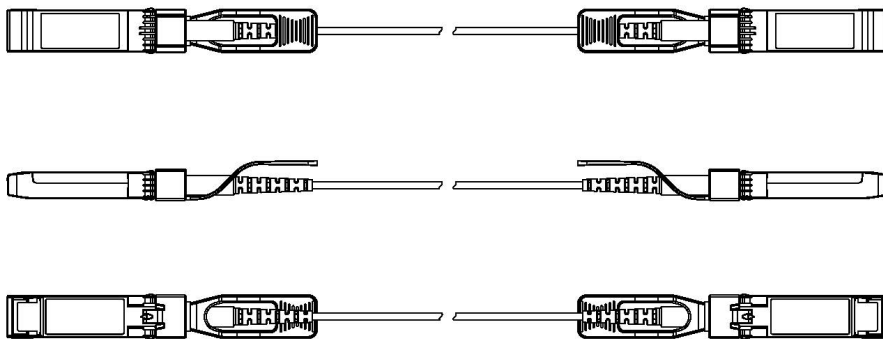

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India, Middle East & Africa P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS