



# Product Data

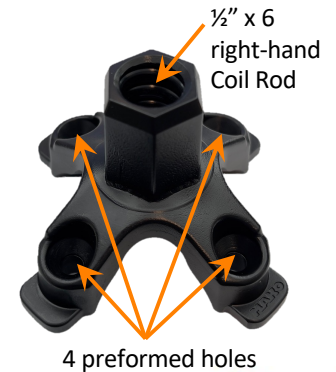

## CoilStand® Adjustable Screed Chair Support

<b>PRODUCT NUMBER</b>	08244CS6R
<b>SIZE</b>	1.75" overall height
<b>APPLICATION</b>	Designed to be an adjustable support for a FinCap® or JAWS® screed chair with a ½" x 6 right-hand coil rod Elevated slabs on metal decking or wood forms
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• 1.75" vertical adjustment with each rod length</li> <li>• A nut and washer provide fine-tuning during placement to accommodate deck deflection</li> <li>• 4.5" minimum slab thickness using a FinCap® and 1.5" ID pipe screed</li> <li>• Different size threaded rods are used for different slab thicknesses. See the chart below. Be sure to not cut shorter rods as it will impact the adjustability.</li> <li>• Four preformed holes for easy securing to decks</li> <li>• Secure to wood deck with nail to ensure easy deck break-away</li> <li>• Secure to metal deck with metal screws</li> <li>• FinStands are designed to be stay-in-place forms</li> <li>• Made of impact resistant, medical grade polypropylene</li> <li>• Will not corrode even in extreme environments</li> <li>• Iowa DOT approved, other states pending</li> <li>• Ideal for use on super flat floors to stay compliant with ACI 302.1R-04, ACI 117 and ASTM E 1155</li> </ul>
<b>SPACING</b>	Recommend placing a CoilStand screed chair every 3-4 ft depending on length of screed pipe and sub-grade
<b>LOAD</b>	Holds up to 1,000 lbs
<b>COVERAGE</b>	100 CoilStands per 3,000sf 100 FinStands per bag
<b>MANUFACTURER</b>	Made in USA MAKO Enterprises LLC, Des Moines, IA 50131

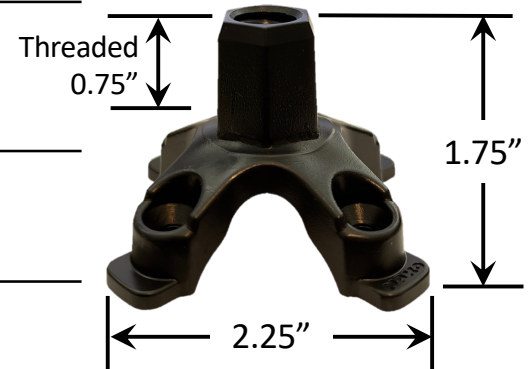


### FinCap Slab Depth Chart

SLAB DEPTH		RECOMMENDED ALL-THREAD LENGTH	
4.5 – 6.25"	115 - 155 mm	2.25"	57 mm
5.5 – 7.25"	140 – 185 mm	3.25"	82 mm
6.5 – 8.25"	165 – 210 mm	4.25"	108 mm
7.5 – 9.25"	190 – 235 mm	5.25"	133 mm
8.5 – 10.25"	215 – 260 mm	6.25"	158 mm
9.5 – 11.25"	240 – 285 mm	7.25"	184 mm
10.5 – 12.25"	265 – 310 mm	8.25"	209 mm

NOTE: FOR SLABS GREATER THAN 6" (155MM) USING A STEEL ALL-THREAD IS RECOMMENDED

Threaded Rod length will be dependent on the height of the screed rail when using JAWS small or large screed chairs

### CRITICAL HEIGHT ADJUSTMENTS

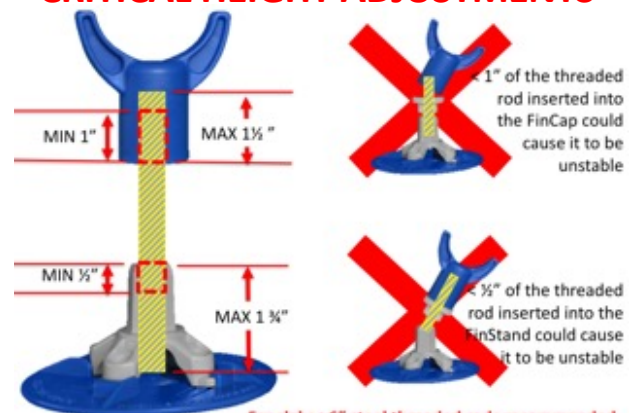

For slabs >6" steel threaded rods recommended

Patented: 8,096,182, 8,544,182 and Patent Pending