

Light-O-Rama "CPC" Package

4 Bats - Assembly Instructions

Included in this Package:

- 4 Coro Bats - 50 Nodes Each. "Pixel Path" for pixel pushing included on the back of each prop. 34" width x 11" height
- 4 Strands of Black Bullet Pixels - 50 Ct (4" spacing).
- Pixie4 Controller - Assembled -12V - With Black LOR Dangles Included

Optional Package Additions:

- 4 Pixel Extensions - Black
- Cat5 Cable (Required for Connection)



Customer Provided (If Applicable):

- Mounting material for home attachment
- Metal stakes or other ground mounting material

Prop Assembly and Connection

When viewing the bat from the back, the Pixel Path "star" (for "start") should be at the top in the face, with the pixel path continuing in a counterclockwise fashion until it reaches the "square" (for "stop").

When viewed as the audience, bat "1" should be on the left of a horizontal row or on the top of a vertical row of bats.

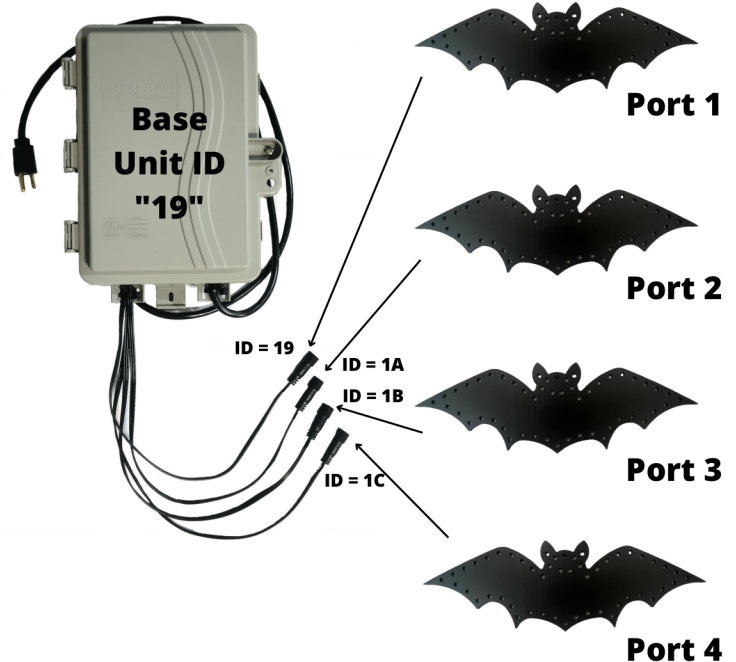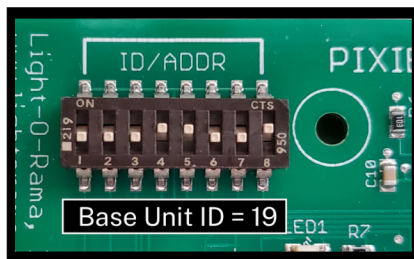

Sequence Use

To use these props with RGBPlus Sequences, the Pixie controller must be connected to the AuxA (computer) or Net 2 (Director) network. You must be using 5.6.8 or higher in order to use RGBPlus Sequences with a computer. Effects for these props are not included in RTG or YCM sequences.

To use with RGBPlus sequences, the Pixie4 should be given a base Unit ID of 19; The four Unit IDs for the four ports of this Pixie4 controller (and therefore your bats) must be 19, 1A, 1B and 1C, both physically on your controller and in your Preview, which correspond to ports 1, 2, 3, and 4 of your Pixie4.

Scan the QR code to learn more about using this package with RGBPlus Sequences or modifying the IDs and Networks for your own custom layout.

