

Description

This adapter consists of a FME female on one end and a SMA female on the other. It is typically used to convert a FME male cable to a SMA female cable.

Physical Characteristics

Connector Plating Nickel

Connectors

Connector A FME Female

Connector B SMA Female

Performance

Impedance 50 Ohm

Product Support


Country of Origin Taiwan

Packaging Information

Package Quantity 1

Product Weight 0.02lbs



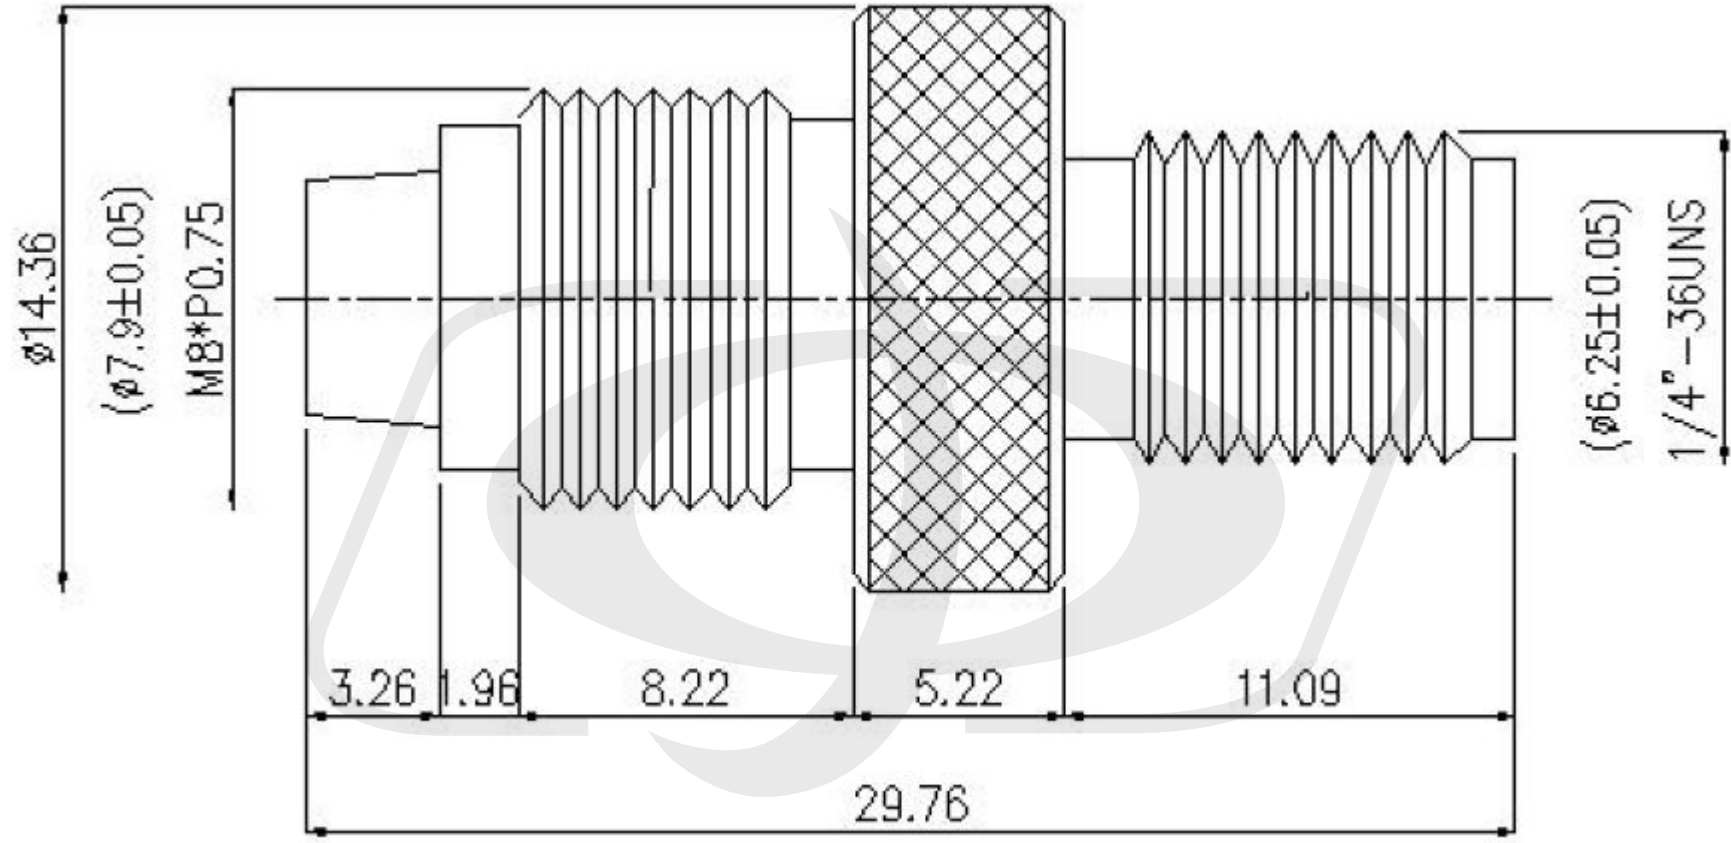

Tolerance

x.	± 0.2
xx.	± 0.1
xxx.	± 0.05
Angle	$\pm 0.5^\circ$