

## **C50 Gender Changer Male to Male**

AD-C50-1SL - Specifications

## **Description**

This adapter consists of a C50 male on one end and a C50 male on the other. It is primarily used to convert a C50 female cable to a C50 male cable.

## **Physical Characteristics**

Connector Plating Nickel

Contact Plating Gold

Pin Assignment Straight Through

Body Style Slimline

**Connectors** 

Connector A C50 Male

Connector B C50 Male

**Packaging Information** 

Packaging Quantity


Product Weight 0.10 lbs [0.05 kg]





## **C50 Gender Changer Male to Male**

AD-C50-1SL - Line Drawing

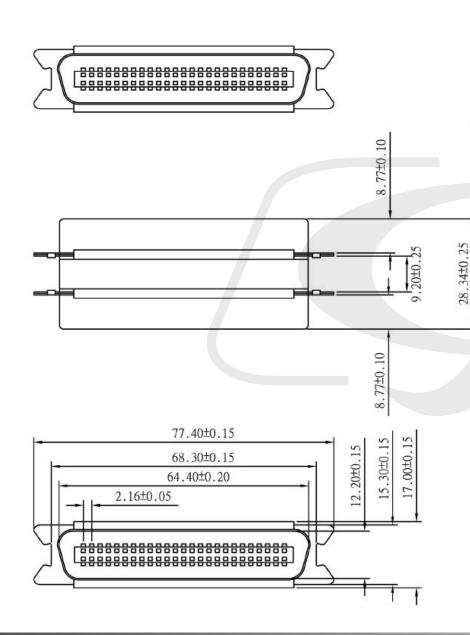



PIN	OUT:	50Male		50Male
		1 .		- 1
		2 -		- 2
		3 -		- 2
		4 -	)	- 4
		49 -		- 49
		50 -		- 50
		G -		- G

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: NicKel Silver CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute INSULATOR RESISTANCE: 500M min at 500V DC

TEMPERATURE: -25°C—+105° C