

2.5mm Stereo Male to Male Cable - Riser Rated CMR/FT4 - White

AUD-120-xxWH - Specifications

Description

This ultra slim stereo audio cable has a 2.5mm male on one end and a 2.5mm male on the other. It is typically used to connect 2.5mm mobile devices such as some MP3 players and smart phones to 2.5mm stereo inputs. The ultra slim connectors and cable are designed to be lightweight, durable and fit perfectly in mobile devices. They also work with most protective cases.

Physical Characteristics

Connector Plating Gold
Cable Diameter 2.8mm
Wire Gauge 28AWG

Jacket Material PVC - Polyvinyl Chloride

Fire Rating FT4 (Riser CMR)

Cable Shielding 85% Bare Copper Spiral

Strain Relief Molded PVC
Storage Temperature -10 C to +70 C
Operating Temperature 0 C to 45 C

Connectors

Connector A 2.5mm Stereo Male
Connector B 2.5mm Stereo Male

Connector A Diameter 7.6mm

Connector B Diameter 7.6mm

<u>Approvals</u>

c(UL)us Yes - Cable

Environmental

RoHS Yes
Reach Yes
Conflict Materials Yes

Package Information

Package Quantity 1

Warranty Information


Warranty Limited Lifetime





2.5mm Stereo Male to Male Cable - Riser Rated CMR/FT4 - White

AUD-120-xxWH - Line Drawing

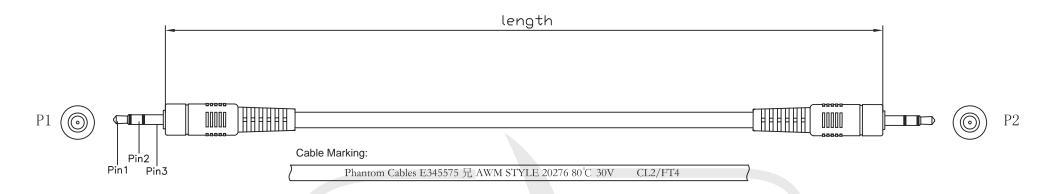

| P/N: | Length: | |
|--------------|-------------|--|
| AUD-120-01WH | 305±15MM | |
| AUD-120-03WH | 915±20MM | |
| AUD-120-06WH | 1830±30MM | |
| AUD-120-10WH | 3050±40MM | |
| AUD-120-15WH | 4575±50MM | |
| AUD-120-25WH | 7625±70MM | |
| AUD-120-35WH | 10675±100MM | |
| AUD-120-50WH | 15250±150MM | |

| Di | PIN OUT | DO |
|---------------|---------|------|
| P1 | White | P2 |
| 1 | Red | — I |
| Z | | —— Z |
| 3 —— | sp | 3 |









