



# OS2 Singlemode 9 Micron AFL (Corning) Duplex Zip Cord - 2mm Jacket - OFNR Riser Fiber Bulk Cable (per meter)

BK-F2Z-SMB-R - Specifications

## Description

This cable is primarily used in the assembly of duplex fiber patch cords used in server rooms, data centers and other point to point indoor applications.

## Physical Characteristics

Color	Yellow
Fiber Optic Type	Riser Zipcord 2.0 Singlemode Duplex 9/125 micron 9
Fiber Core Diameter	micron $\pm$ 2.0 micron
Nominal Diameter	2.0mm x 4.0mm
Tension(Installation)	22 lbs
Tension(Long Term)	7 lbs
Bending Radius(Installation)	2.0cm
Bending Radius(Long Term)	1.2cm
Operating Temperature	0°C ~ +70°C
Storage Temperature	-40°C ~ +75°C
Maximum Attenuation	0.5
Gigabit Ethernet Min. Link Distance	5,000M
10 Gigabit Ethernet Min. Link Distance	10,000M
Fire Rating	OFNP

## Certification(s)



ETL	Yes
c(ETL)	Yes

## Product Support

RoHS	Yes
Country of Origin	USA

## Packaging Information

Package Quantity	1
Product Weight	0.03 lbs [0.01 kg]

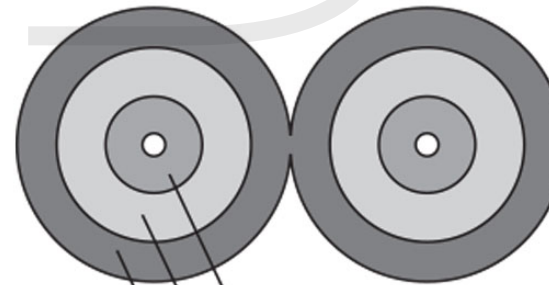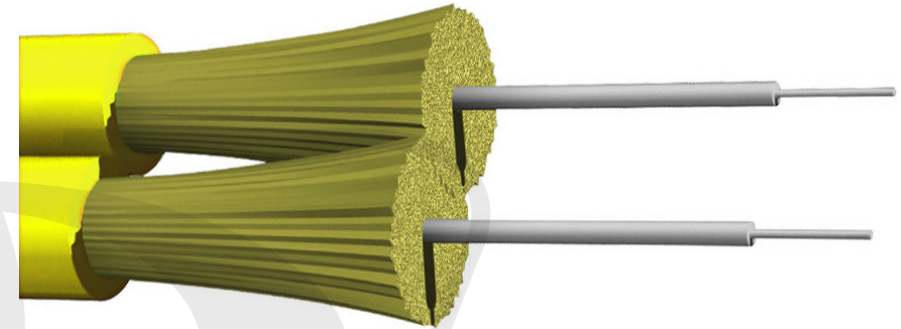

tight buffered fiber (900µm buffer)  
aramid yarn  
outer jacket