





# 6-fiber 50 Micron Multimode OM3 Indoor Aqua - Corning ClearCurve - OFNP Plenum - per meter

BK-F6CP-OM3-P-T - Specifications

## Description

This bulk OM3 fiber cable is indoor plenum rated and has a tight buffer construction. It is OFNP rated for plenum and general inside plant environments.

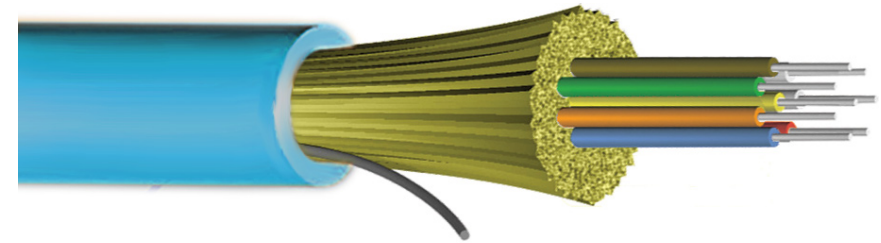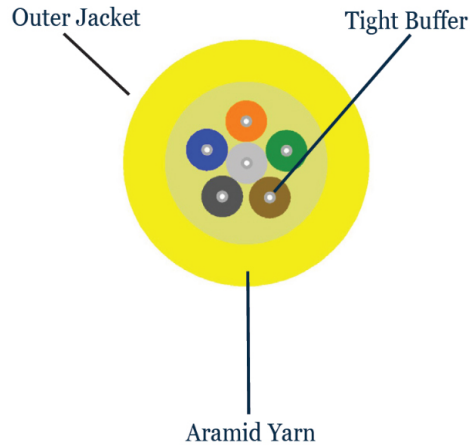

## Physical Characteristics

Color	Aqua
Fiber Optic Type	OM3 50 micron Multimode Plenum Indoor Cable
Fiber Count	6-Strand
Glass Fiber	Corning ClearCurve
Outer Jacket Material	Flame Retardant PVC
Tight Buffer Material	Flame Retardant PVC
Strength Member	Aramid Yarn
Weight	57 lbs / km
Nominal Outer Diameter	4.8mm
Min Bend Radius, Installation	7.2cm
Min Bend Radius, Operation	4.8cm

Operating Temperature	0 deg C ~ +70 deg C
Storage Temperature	-40 deg C ~ +70 deg C
Wavelength	850 / 1300nm
Maximum Attenuation	3.0 / 1.0 dB/km
Link Length	550m (10Gb/s@850nm)

## Certifications

UL	Yes
----	-----

## Product Support

RoHS	Yes
Country of Origin	USA

## Packaging Information

Product Weight	0.10 lbs/m
----------------	------------