
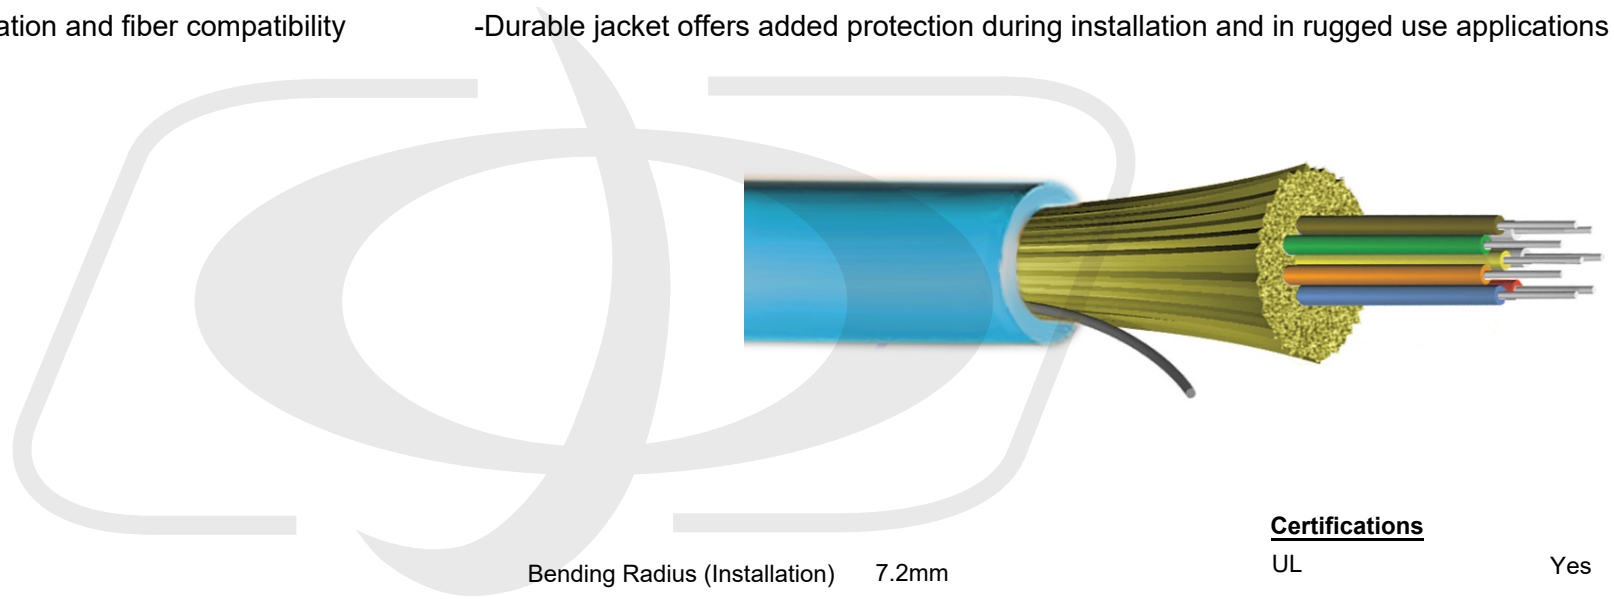


Description

This bulk OM4 fiber cable is indoor riser rated and has a tight buffer construction. It is OFNR rated for riser and general inside plant environments. It is ideal for routing between communications closets and equipment rooms.

Features:

- 900µm Tight Buffers
- Aramid yarn strength members
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Durable jacket offers added protection during installation and in rugged use applications

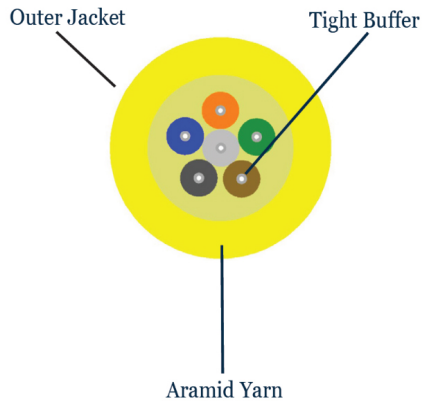

Physical Characteristics

Color	Aqua
Fiber Optic Type	OM4 50 micron Multimode Riser Indoor Tight Buffered Cable
Fiber Count	6-Strand
Glass Fiber	Corning ClearCurve
Sub Unit Diameter	900 micron
Outer Jacket Material	Flame Retardant PVC
Tight Buffer Material	Flame Retardant PVC
Strength Member	Aramid Yarn
Nominal Diameter	4.8mm

Bending Radius (Installation)	7.2mm
Bending Radius (Long Term)	4.8cm
Operating Temperature	-20 deg C ~ +70 deg C
Storage Temperature	-40 deg C ~ +70 deg C
Wavelength Maximum	850 / 1300nm
Attenuation Fire Rating	3.0 / 1.0 dB/km OFNR, FT4

Certifications

UL	Yes
----	-----

Product Support

RoHS	Yes
Country of Origin	USA

Packaging Information

Product Weight	0.06 lbs/
----------------	-----------

Cable Marking: 6 FIBER DISTRIBUTION CABLE xxxxxxFT xxxx E504569 c(UL)us PLUS CORNING ClearCurve OM4 OPTICAL FIBER (50/125) OFNR RISER RoHS