





Station Z Quad Security Cable - 4C 22AWG Solid Cable CMP Plenum - White

BK-SEC640-xx - Specifications

Description

This bulk plenum rated security alarm cable consists of 4 conductors of 22 gauge wire. It is ideal for wiring for security systems, intercoms and power-limited controls. The cable is plenum (CMP) rated, UL listed, REACH and RoHS Compliant. Ideal for use in cable runs that are located within a plenum air space or partially travel through a plenum airspace.

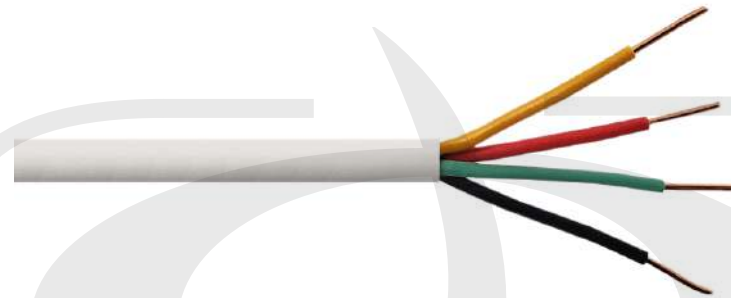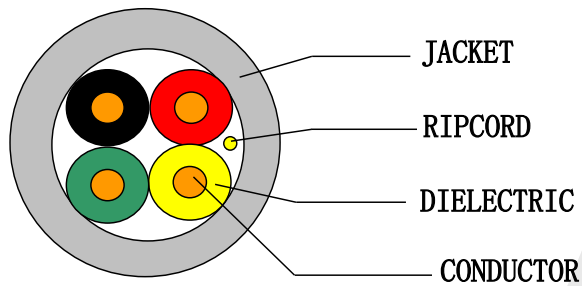

Physical Characteristics

| | | | |
|----------------------|---------------------------|--------------------|--|
| Lengths Available | 1000 foot [305m] Pull Box | Jacket | PL-PVC |
| Color | Black / White | | Diameter over Jacket: 0.1358"±0.006" (3.45±0.15mm) |
| Cable Diameter | 3.0mm | | Nominal Jacket Thickness: 0.018" (0.46mm) |
| Number of Conductors | 4 Conductors | | Minimum Spot: 0.014" (0.36mm) |
| Wire Gauge | 22AWG | Dielectric | PL-PVC |
| Conductor Material | 100% Bare Copper | Ripcord | Diameter over Dielectric: 0.0413"±0.004" Nom.(1.05±0.10mm) |
| Jacket Material | PVC - Polyvinyl Chloride | Operating Voltage | Kevlar |
| Jacket Rating | CMP/FT6 (Plenum Rated) | DCR Conductor | 300V |
| Cable Shielding | None | Temperature Rating | 63.06 Ohms/Km (Nominal) -20 deg C ~ +75 deg C |

Approvals

| | |
|--------------|-----|
| c(ETL)us | Yes |
| ISO/IEC 9001 | Yes |

Environmental

| | |
|------|-----|
| RoHS | Yes |
|------|-----|

Packaging Information

| | |
|------------------|------------|
| Package Quantity | 1 Pull Box |
| Cable Length | 1000ft |
| Product Weight | 18.20 lbs |

Printing:

SECURITY CABLE 4C/22AWG SOLID UNSHIELDED CMP PLENUM (-20C to +75C) c(UL)us E345576 RoHS xxxxFT