




500ft 2C 14AWG Stranded Plenum Bulk Speaker Cable CMP

BK-SPE643-xx - Specifications

Description

This bulk plenum rated speaker cable is made from multi-stranded bare copper cable to capture all highs & lows for optimum audio performance. It is typically run in plenum air spaces and used to connect speakers to amplifiers.

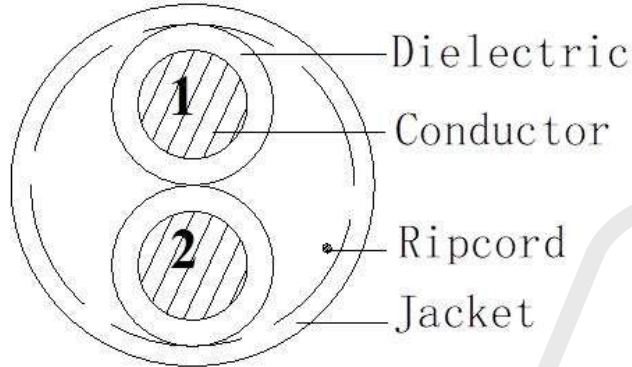

Physical Characteristics

Cable Length	500 foot [152.4m]	Minimum Spot	0.014 inches [0.36mm]
Color	Black / White	DCR Conductor	2.63 Ohms/1000 FT
Cable Diameter	5.1mm		8.62 Ohms/Km (Nom)
Number of Conductors	2C (Black/Red)	Cable Shielding	None
Wire Gauge	14AWG	Temperature Rating	-20 deg C ~ 80 deg C
Conductor Material	100% Bare Copper	Ripcord	DuPont Kevlar®
Jacket Material	PVC - Polyvinyl Chloride		
Jacket Rating	CMP [Plenum Rated]		
Diameter over Dielectric	0.0866 ±0.004 inches Nom. (2.2±0.10mm)		
Nominal Jacket Thickness	0.018 inches [0.46mm]		

Approvals

c(UL)us Yes

Environmental

RoHS Yes

Packaging Information

Package Quantity 1
Product Weight 15.43 lbs