




500ft 2C 14AWG Direct Burial Bulk Speaker Cable CMX - Black

BK-SPW2C14-500DB - Specifications

Description

This bulk direct burial speaker cable is made from multi-stranded copper cable to capture all highs & lows for optimum audio performance. It is typically run outdoors or underground and used to connect speakers to amplifiers.

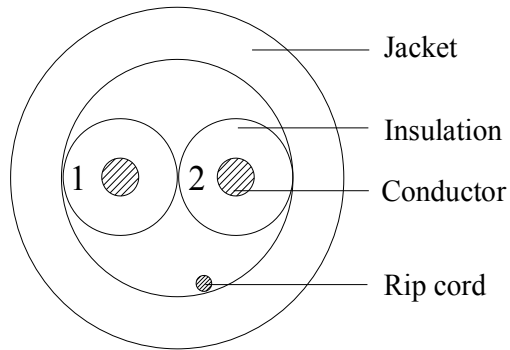

Physical Characteristics

Cable Length	500 foot [152.4m]
Color	Black
Temperature Rating	75 deg C
Cable Diameter	6.40±0.10mm
Number of Conductors	2 Conductor
Wire Gauge	14 AWG
Conductor Material	Stranded Bare Copper
Conductor Diameter	105/0.16±0.004mm
Assembly Diameter	5.20±0.20
Jacket Material	UV CMX PVC
Jacket Rating	Direct Burial
Jacket Average Thickness	0.60mm
Jacket Minimum Thickness	0.54mm
Insulation Average Thickness	0.355mm
Insulation Minimum Thickness	0.330mm

Insulation Diameter	2.60±0.05
Ripcord	Nylon
Cable Shielding	None
Max Voltage Rating	300V
Flammability Test	CMX
Capacitance	<9.8nF/100M
Resistance	70+/-10 OHM
Conductor Resistance	Max 15.5ohm/km at 20°C
Insulator Resistance	Min 50MΩ km at 20°C

Mechanical Characteristics

Before Aging	Tensile Strength (Mpa): >=13.8
	Elongation (%): >=100
Aging Condition (deg C x hrs)	100x168
After Aging	Tensile Strength (Mpa): >=85% of unaged
	Elongation (%): >=50% of unaged

Approvals

ETL, c(ETL) Yes

Environmental

RoHS Yes

Packaging Information

Package Quantity	1
Product Weight	19.9 lbs

Printing:

AUDIO CABLE HIGH STRAND OFC 2C/14AWG CMX UV RATED OUTDOOR/DIRECT BURIAL 75C (ETL)US RoHS xxxxFT