



Mode Conditioning Cable 62.5 Micron - 3mm Jacket LSZH LC to ST Off-set FO-MC110-xx-ST - Specifications

Description

This mode conditioning fiber optic cable is made with Corning glass fiber and consists of a duplex LC male on one end and 2 simplex ST male on the other end. It allows you to connect singlemode equipment such as gigabit routers and switches, to existing multimode cable environments. It does so by emulating a LED light source from a laser light source by off-setting the fusion splice of the singlemode leg onto the multimode cable. They are typically purchased in pairs (one for each end of the cable run) and used in multimode cable runs over 300m. The singlemode cable leg is connected to transmit on the equipment end.

Physical Characteristics

Color	Orange / Yellow Singlemode Leg
Cable Diameter	3mm
Fiber Size	62.5/125 micron - 9/125 micron leg
Connector Ferules	Ceramic
Jacket Rating	Low Smoke Zero Halogen (LSZH)

Connectors

Connector A	1 - LC Duplex Male
Connector B	2 - ST Simplex Male

Performance

Insertion Loss	<0.3db @ 1300nm
----------------	-----------------

Environmental

RoHS	Yes
Conflict Minerals	Yes

Packaging Information


Package Quantity	1
------------------	---

Warranty Information

Warranty	Limited Lifetime
----------	------------------

Cable Weights


3ft - 1m	6ft - 2m	10ft - 3m	15ft - 5m	30ft - 10m
0.08 lbs	0.09 lbs	0.13 lbs	0.20 lbs	0.38 lbs

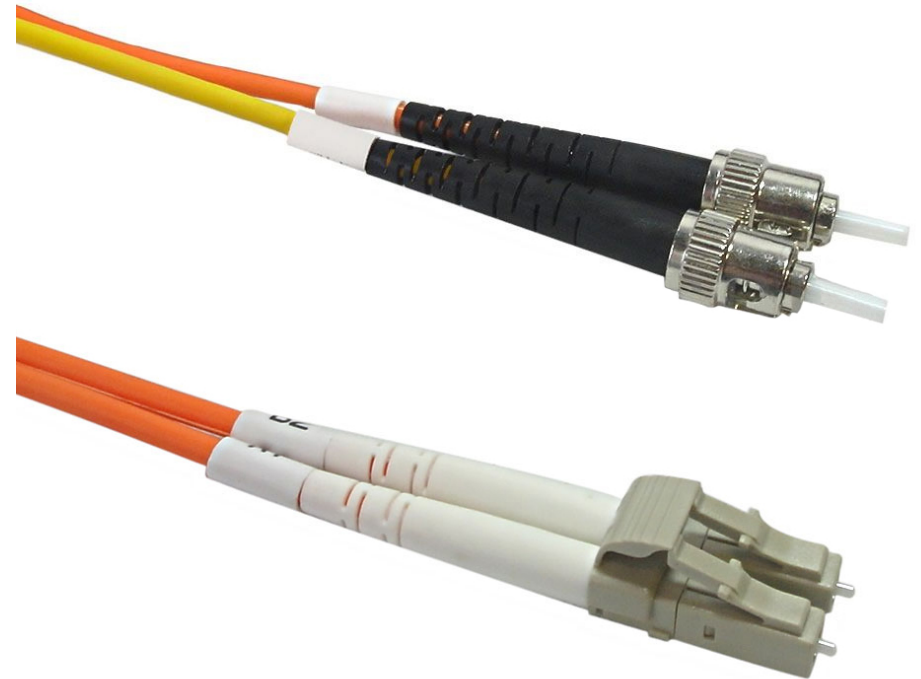



Mode Conditioning Cable 62.5 Micron - 3mm Jacket LSZH LC to ST Off-set

FO-MC110-xx-ST - Line Drawing

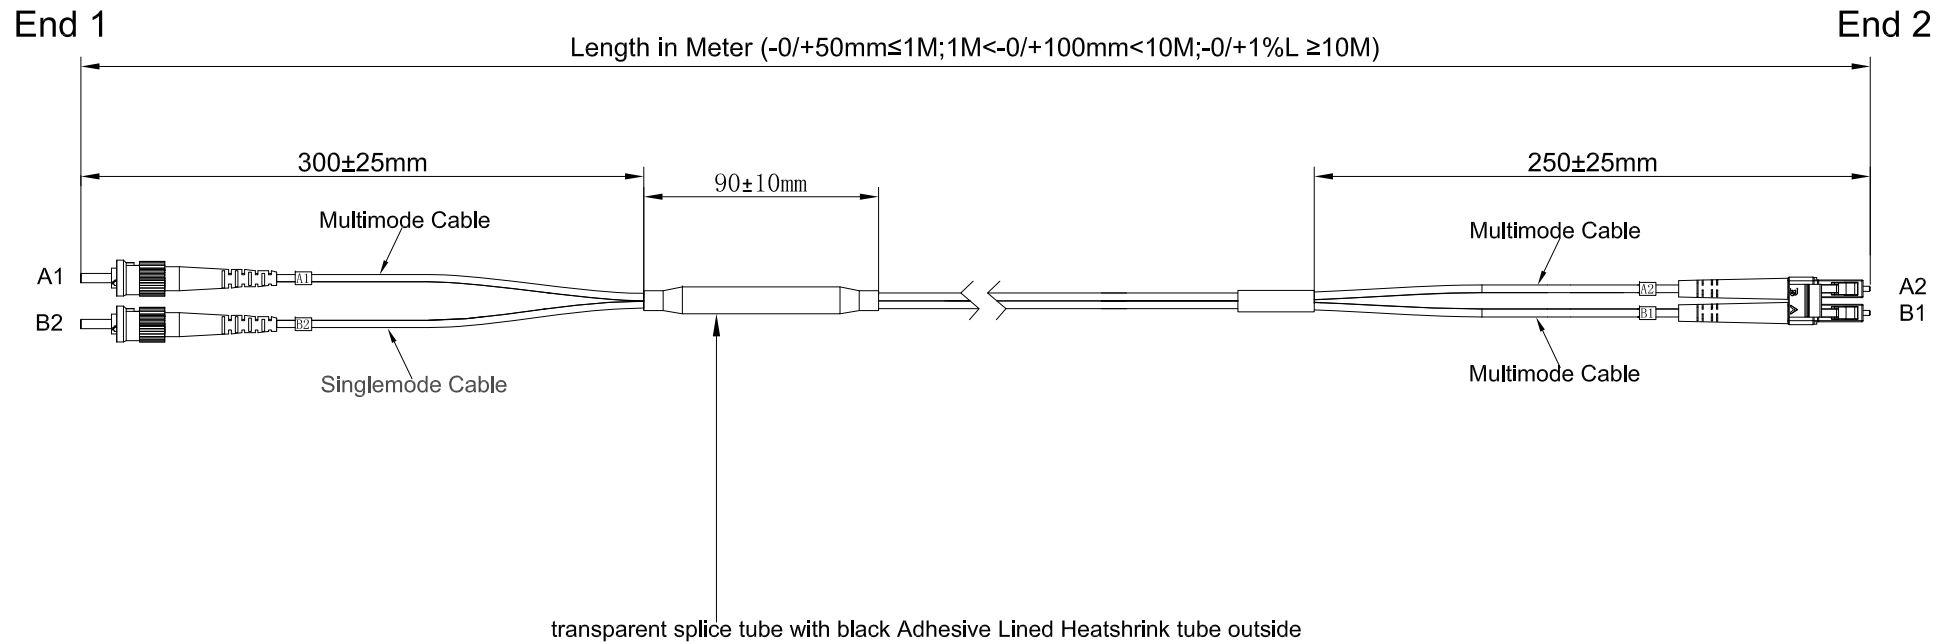

Jacket Printing:

Phantom Cables Plus Corning 62.5/125 OM1 InfiniCor Optical Fiber
Cable c(UL)us E504569 - RoHS LSZH/OFNR (date) (meter count)M

