



# 3m LC/UPC 12-fiber Singlemode 9μ Jacketed Pigtail, 19inch 900um fan-out, OFNR

## FO-PT608-10J-12F - Specifications

### Description

These 9 micron (OS2) fiber optic jacketed pigtails have terminated LC fiber optic connectors on one side and are un-terminated on the other side. The un-terminated ends are meant to be stripped and fusion spliced to single fibers of a multi-strand fiber trunk cable.

### Physical Characteristics

Cable Length	3m [9.84 foot]
Color	Yellow
Cable Diameter	6.2mm
Sub-Unit Diameter	900 micron
Fiber Size	9/125 micron
Fiber Type	Singlemode
Glass Manufacturer	Corning Glass
Connector Ferrules	Ceramic
Fiber Classification	OS2
Jacket Rating	Riser OFNR

### Connectors

Connector A	12 LC/UPC Simplex Male
Connector B	Un-Terminated

### Performance

Insertion Loss	<0.3db @ 1550nm
Return Loss	≥55db
Speed	10 Gbps
Endface Geometry	100% Interferometer Tested

### Environmental


RoHS	Yes
Conflict Minerals	Yes

### Packaging Information

Package Quantity	1 Cable
Product Weight	0.20 lbs [0.09kg]

### Warranty Information

Warranty	Limited Lifetime
----------	------------------

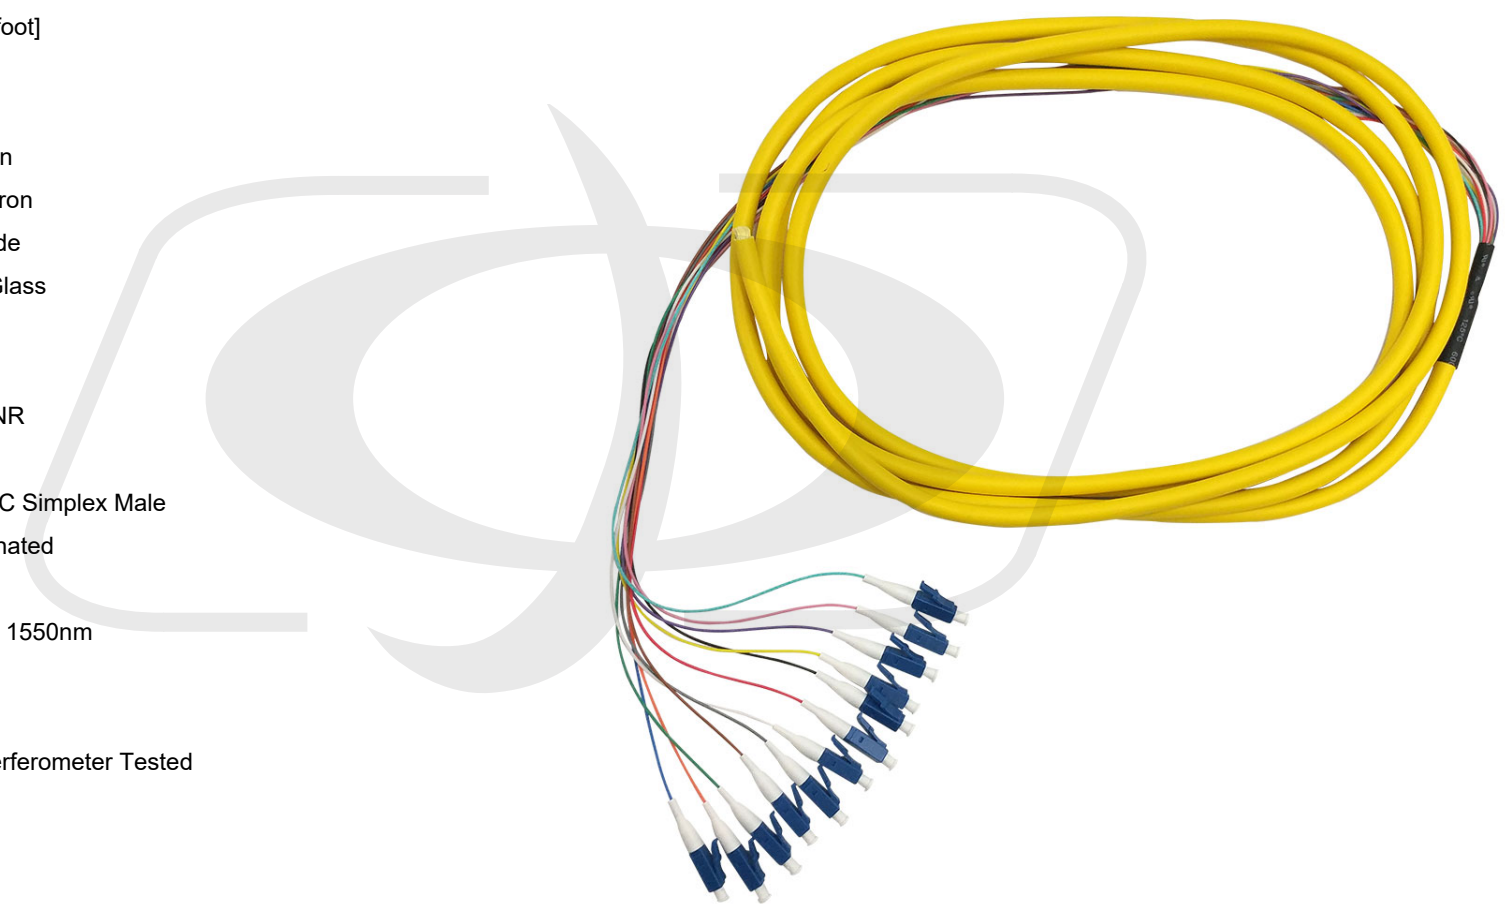



# 3m LC/UPC 12-fiber Singlemode 9µ Jacketed Pigtail, 19inch 900um fan-out, OFNR

FO-PT608-10J-12F - Line Drawing

