



XLR 3-pin Male to 1/4 Inch TS Male Unbalanced Cable

PAU-320-xx - Specifications

Description

This unbalanced interconnect audio cable has a XLR male on one end and a TS male on the other. It is typically used to connect a XLR input to an unbalanced TS output.

Physical Characteristics

Connector Plating	Gold
Cable Diameter	6.0mm
Wire Gauge	22AWG
Jacket Material	PVC - Polyvinyl
Cable Shielding	Chloride 95% Copper
Strain Relief	Spiral Molded PVC

Connectors

Connector A	XLR Male
Connector B	TS Male

Approvals

c(UL)	Yes - Cable
-------	-------------

Environmental

RoHS	Yes
------	-----

Package Information

Package Quantity	1
------------------	---

Warranty Information


Warranty	Limited Lifetime
----------	------------------





XLR 3-pin Male to 1/4 Inch TS Male Unbalanced Cable

PAU-320-xx - Line Drawing

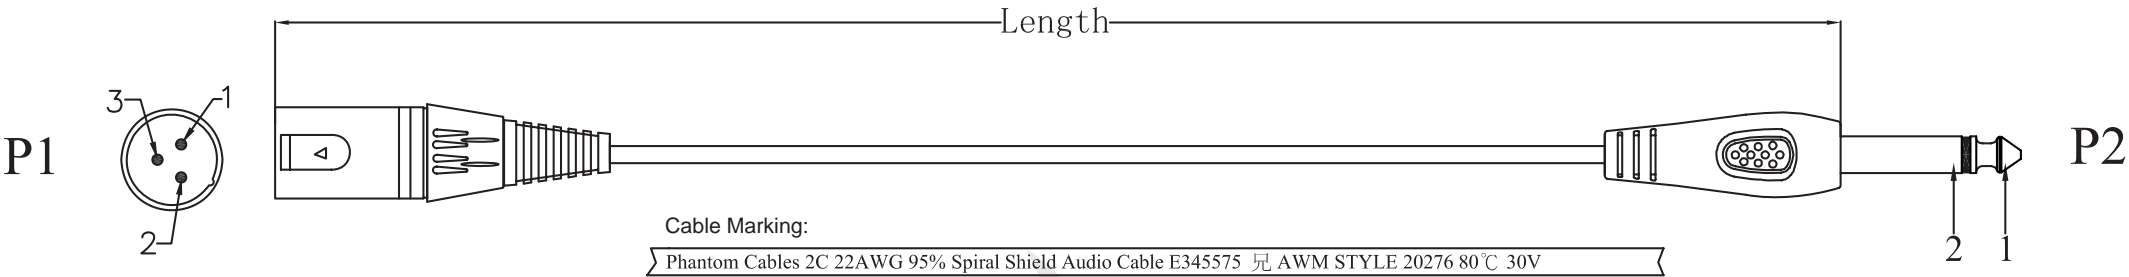

LENGTH:	P/N:
915±30MM(3ft)	PAU-320-03
1830±30MM(6ft)	PAU-320-06
3050±40MM(10ft)	PAU-320-10
4575±50MM(15ft)	PAU-320-15
7625±50MM(25ft)	PAU-320-25

