



XLR 3-pin Male to 1/4 Inch TRS Male Balanced Cable

PAU-321-xx - Specifications

Description

This balanced interconnect audio cable has a XLR male on one end and a 1/4 inch TRS male on the other. It is typically used to connect a XLR input to a balanced 1/4 inch TRS output.

Physical Characteristics

Connector Plating	Gold
Cable Diameter	6.0mm
Wire Gauge	22AWG
Jacket Material	PVC - Polyvinyl Chloride
Cable Shielding	95% Copper Spiral
Strain Relief	Molded PVC

Connectors

Connector A	XLR Male
Connector B	1/4 Inch TRS Male

Approvals

c(UL)	Yes - Cable
-------	-------------

Environmental

RoHS	Yes
------	-----

Package Information

Package Quantity	1
------------------	---

Warranty Information


Warranty	Limited Lifetime
----------	------------------





XLR 3-pin Male to 1/4 Inch TRS Male Balanced Cable

PAU-321-xx - Line Drawing

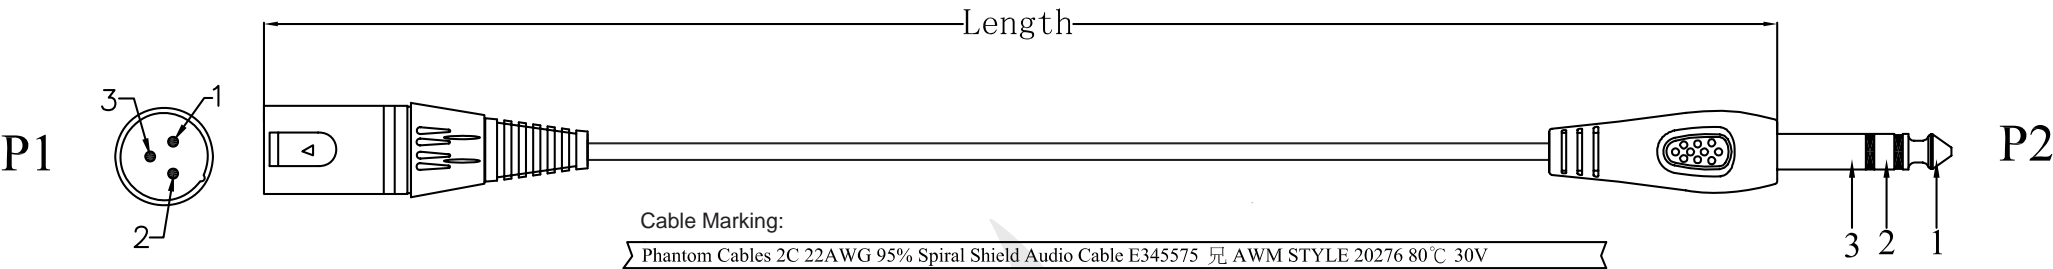

LENGTH:	P/N:
915±30MM(3ft)	PAU-321-03
1830±30MM(6ft)	PAU-321-06
3050±40MM(10ft)	PAU-321-10
4575±50MM(15ft)	PAU-321-15
7625±50MM(25ft)	PAU-321-25

PIN OUT			
P1		P2	
shell+1	Braid	3	
2	RED	1	
3	BLACK	2	

