



# XLR 3-pin Female to 1/4 Inch TS Male Unbalanced Cable

PAU-325-xx - Specifications

**Description**

This unbalanced interconnect audio cable has a XLR female on one end and a TS male on the other. It is typically used to connect a XLR output to an unbalanced TS input.

**Physical Characteristics**

Connector Plating	Gold
Cable Diameter	6.0mm
Wire Gauge	22AWG
Jacket Material	PVC - Polyvinyl Chloride
Cable Shielding	95% Copper Spiral
Strain Relief	Molded PVC

**Connectors**

Connector A	XLR Female
Connector B	TS Male

**Approvals**

c(UL)	Yes - Cable
-------	-------------

**Environmental**

RoHS	Yes
------	-----

**Package Information**

Package Quantity	1
------------------	---

**Warranty Information**


Warranty	Limited Lifetime
----------	------------------





XLR 3-pin Female to 1/4 Inch TS Male Unbalanced Cable

PAU-325-xx - Line Drawing

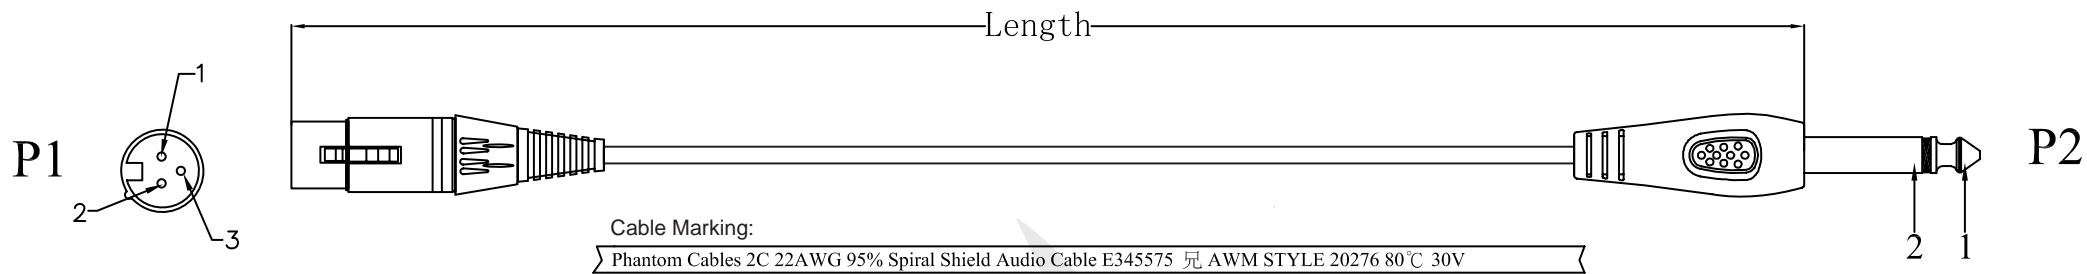

LENGTH:	P/N:
915±30MM(3ft)	PAU-325-03
1830±30MM(6ft)	PAU-325-06
3050±40MM(10ft)	PAU-325-10
4575±50MM(15ft)	PAU-325-15
7625±50MM(25ft)	PAU-325-25

