

PP-48C6S-APT - Specifications

## **Description**


This 48 port Cat6 2U shielded patch panel has RJ45 female to female feed-through keystone couplers on both ends. It is meant to be mounted on a 19" rack or cabinet and provides an easy method to couple Cat6 patch cables.

## **Physical Characteristics**

i nyoloal enalactoriotico	
Color	Black (Powder Coat)
Material	Steel
Connector Type	CAT6 Shielded
Ports	48
Rack Space	2U
Product Dimensions	19" W 3.5" H [48 cm W, 8.9 cm H]
Rackmountable	Yes, 19" Rack or Cabinet
<b>Connectors</b>	
Front	48 - RJ45 CAT6 Female
Rear	48 - RJ45 CAT6 Female
<b>Environmental</b>	
RoHS	Yes
Packaging Information	
Package Quantity	1 - Patch Panel
Product Weight	2.5 lbs [1.13 kg]

**PHANTOM CABLES** 48-port Shielded Angled Keystone Patch Panel - 19 inch Rackmount 1U with Cable Manager - Unloaded

PP-48KAS-1U - Line Drawing

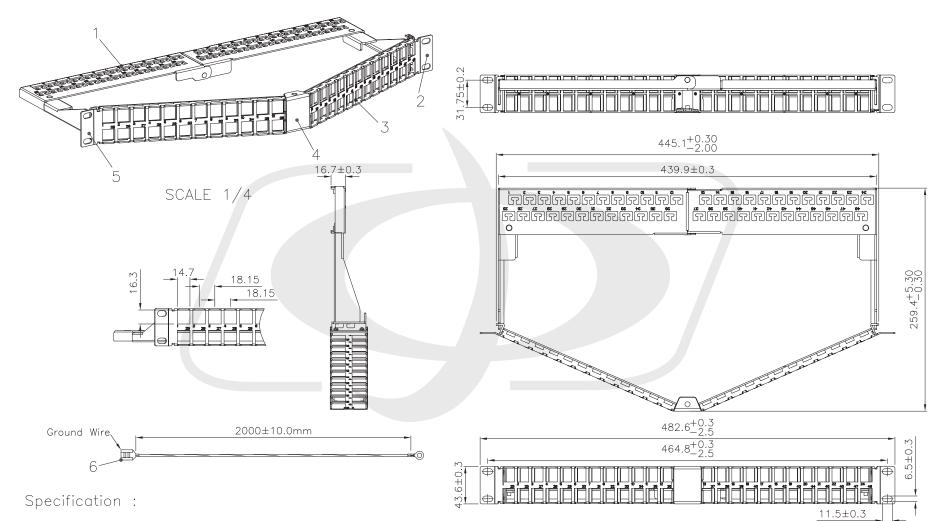


Material :

- 1. Support Bar : SPCC, 1.5mm thickness with Black(RAL 9005) color painted.
- 2. Right Front Panel : SPCC, 1.5mm thickness with Black(RAL 9005) color painted.
- 3. Rear Panel: SPCC, 1.5mm thickness with Nickel plated.
- 4. Middle-sheet : SPCC, 1.5mm thickness with Black(RAL 9005) color painted.
- 5. Left Front Panel : SPCC, 1.5mm thickness with Black(RAL 9005) color painted
- 6. Ground Wire : 16 AWG Wire, with Green/Yellow striped color, length 200 cm.



## **RJ45 Keystone Jack, Female to Female Cat6 Shielded**

JK-C6-FFS - Line Drawing

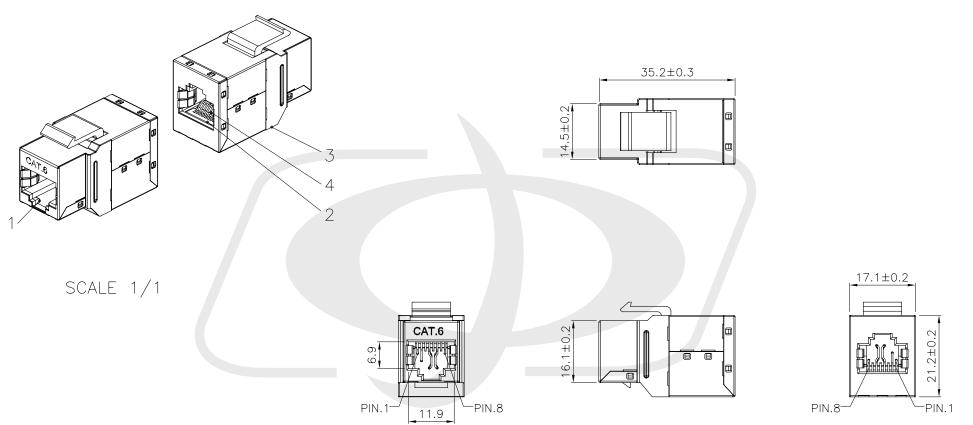

Specification :

Material :

- RJ45 Jack Housing : ABS+PC, UL 94V-0, with Black color.
  Contact Bracket : PC, UL 94V-2, Transparent color.
  RJ45 Jack Shield : Bronze with Nickel plated.

- 4. RJ45 Jack Contact :
  - 4-1. Material : Phosphor Bronze with Nickel plated.
- 4-2. Finish : 50 micro-inch Gold plated on Plug contact area.
- 5. PCB : FR4, UL 94V-0.