



IEC C13 to IEC C14 Power Cable - 14AWG

PW-100C-xx - Specifications

Description

This power cord consists of a C14 male on one end and a C13 female on the other end. It is typically used to connect a server to a PDU in a data center environment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Available	Black / Blue / Green / Red / White / Yellow
Lengths Available	1ft / 2ft / 3ft / 4ft / 6ft / 8ft / 10ft / 12ft / 15ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1, FT2
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C13
Connector B	IEC 60320 C14

Performance


Power Rating	15 Amp / 250 Volt
--------------	-------------------


Approvals / Environmental

C13	c(UL)us
C14	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------

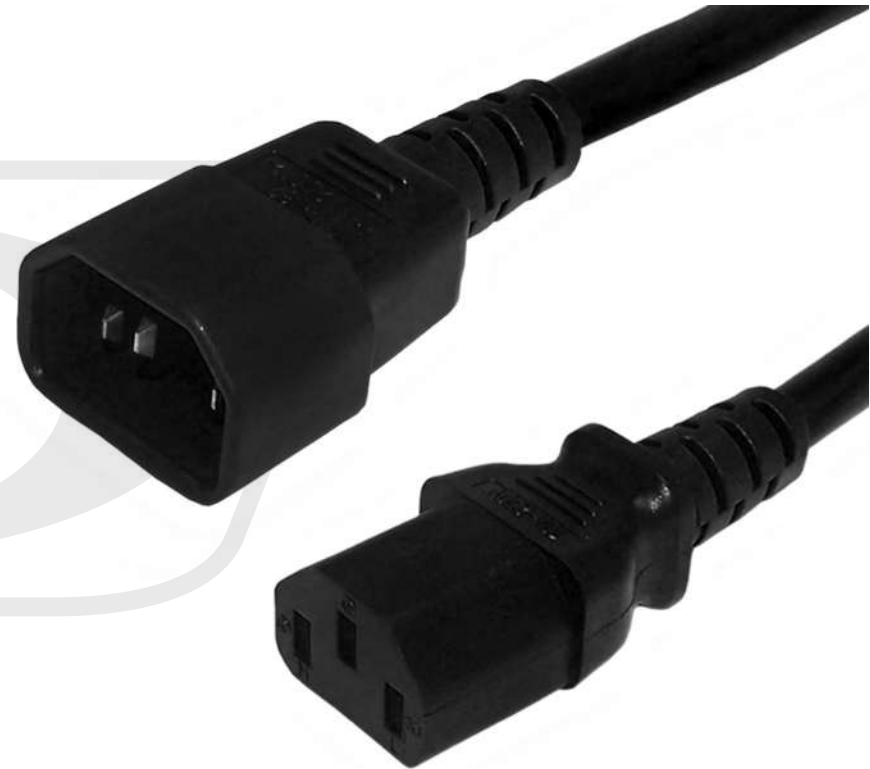

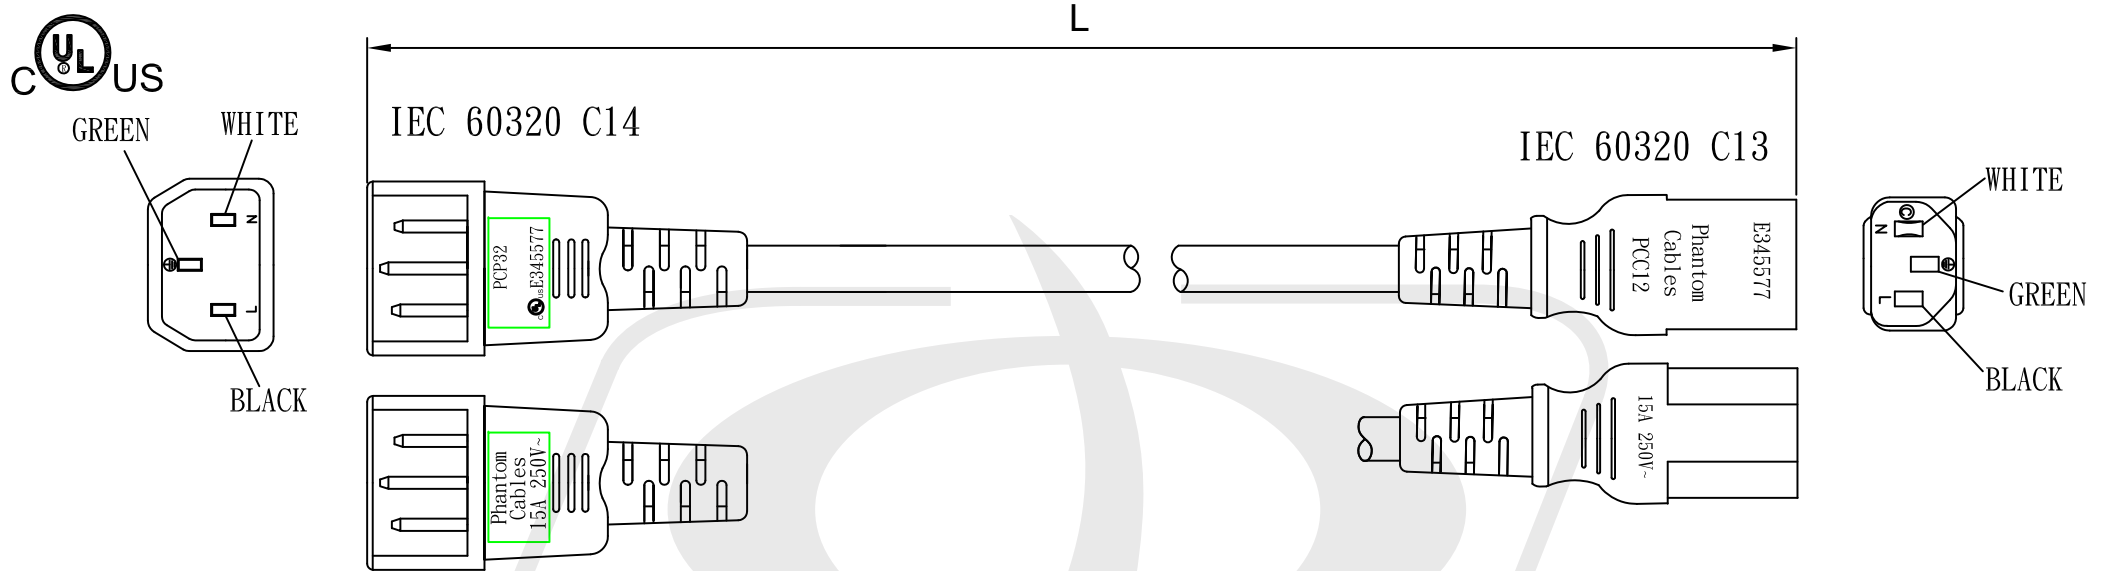

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm²) 105 °C 300V VW-1

Tolerance

>0±0.30



>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

P/N	LENGTH(Lmm)	UPC
PW-100C-01	305mm	675678000357
PW-100C-01BL	305mm	675678000616
PW-100C-01GN	305mm	675678000685
PW-100C-01RD	305mm	675678000470
PW-100C-01WH	305mm	675678000548
PW-100C-01YL	305mm	675678000753
PW-100C-02GN	610mm	675678000692
PW-100C-03BL	915mm	675678000630
PW-100C-04WH	1220mm	675678000579
PW-100C-05GN	1524mm	675678037599
PW-100C-06YL	1830mm	675678000791
PW-100C-08BL	2438mm	675678037582
PW-100C-08GN	2438mm	675678037605
PW-100C-08WH	2438mm	675678037568
PW-100C-08YL	2438mm	675678037612
PW-100C-10BL	3048mm	675678000661
PW-100C-10GN	3048mm	675678000739
PW-100C-10RD	3048mm	675678000524
PW-100C-10WH	3048mm	675678000593
PW-100C-10YL	3048mm	675678000807
PW-100C-12BL	3658mm	675678029532
PW-100C-12GN	3658mm	675678029549
PW-100C-12RD	3658mm	675678029518
PW-100C-12WH	3658mm	675678029525
PW-100C-12YL	3658mm	675678029556
PW-100C-15BL	4572mm	675678000678
PW-100C-15GN	4572mm	675678000746
PW-100C-15RD	4572mm	675678000531
PW-100C-15WH	4572mm	675678000609
PW-100C-15YL	4572mm	675678000814

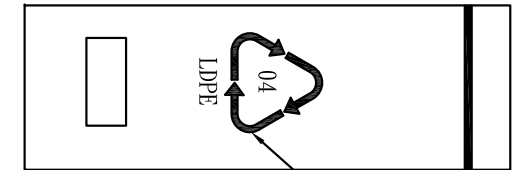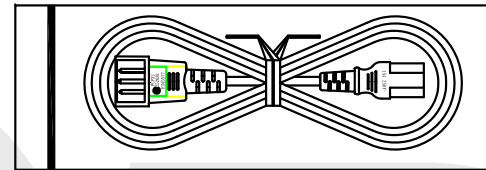


Black Logo

THE INDIVIDUALLY BAGGED CORDS WILL BE PLACED IN BAGS OF 10 PIECES

LENGTH

P/N

BARCODE TYPE: UPCA

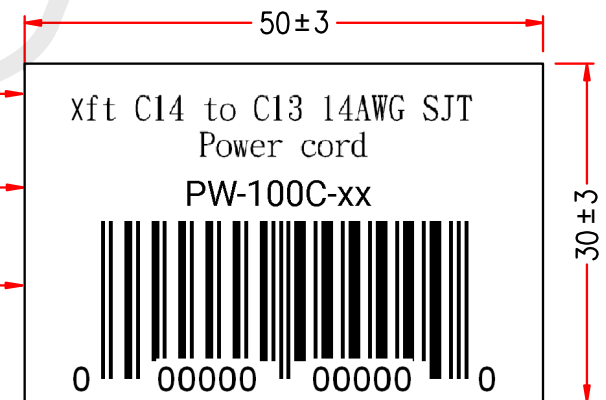

LABEL