



NEMA 5-15P to IEC C13 Power Cable - Shielded - 14AWG

PW-105C-xxSH - Specifications

Description

This shielded power cable consists of a 5-15P male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Available	Black
Lengths Available	3ft / 6ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl
Jacket Fire Rating	Chloride FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C13
Connector B	NEMA 5-15P

Performance

Power Rating	15 Amp / 125 Volt
--------------	-------------------




Approvals / Environmental

C13	c(UL)us
5-15P	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



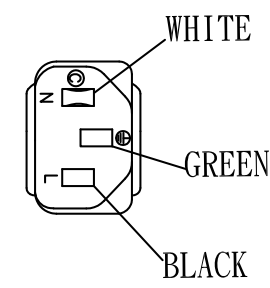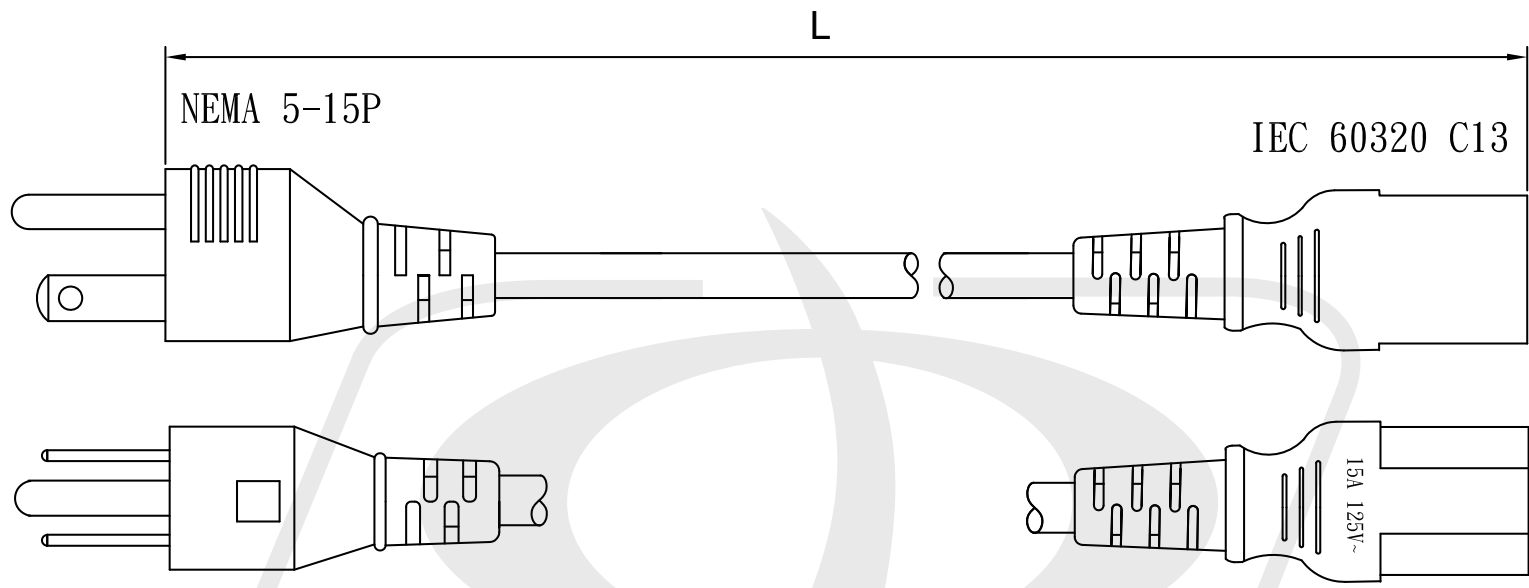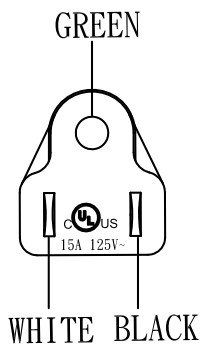

MARKING:

c(UL)us E241374 SJT SHIELDED 3/C 14AWG(2.08mm²) 105°C 300V VW-1

Tolerance


- >0 ±0.30
- >1.0 ±0.50
- >10.0 ±1.0
- >20.0 ±2.0

Angle: ±1°



NEMA 5-15P to IEC C13 Power Cable - Shielded - 14AWG

PW-105C-xxSH - Packaging Information

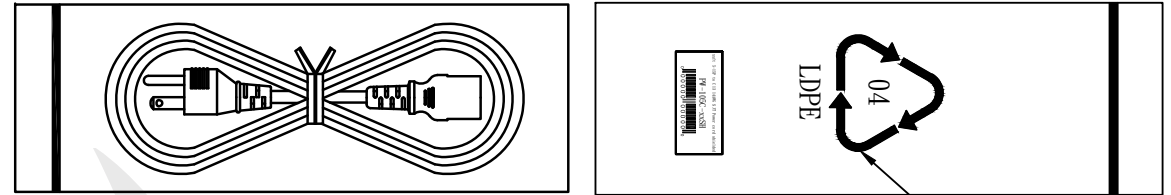

THE INDIVIDUALLY PACKED CORDS WILL BE PACKED IN BAGS OF 10 PIECES

P/N	LENGTH(Lmm)	UPC
PW-105C-03SH	915mm	675678001873
PW-105C-06SH	1830mm	675678001880

